REAL TIME CLOCK MODULE (I²C-Bus)

Built-in 32.768 kHz DTCXO, High Stability

Pb Free
RoHS Compliant

Product Number (2,000 pcs / Reel)
RX8804CE XA: X1B000371000100
RX8804CE XB: X1B000371000200


RX8804CE

- Built-in frequency adjusted 32.768 kHz crystal unit and DTCXO
- Interface Type : I²C-Bus
- Selectable clock output : 32.768 kHz, 1024 Hz, 1 Hz
- Time stamp function : 1 time stamped from year to second
- Interrupt output : Wake up every minute or every second
- Alarm interruption : Day, date, hour, minute
- Auto repeat wakeup timer interruption
- Self-monitoring interruption : Crystal oscillation stop, V_{BAT} low, V_{DD} low
- SOUT pin outputs that selected flag bit value



RX8804CE
(3.2 × 2.5 mm, t = 1.0 mm Max.)

Block diagram

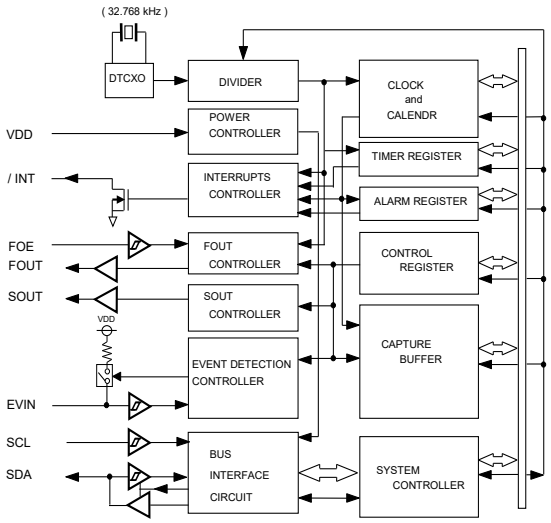


Overview

- Interface type
  I²C-Bus interface Fast-Mode 400 kHz
- High stability
  XA: ± 3.4 x 10^{-6} / -40 ºC to +85 ºC (equivalent to ±9 s of mo. deviation)
  ± 8.0 x 10^{-6} / +85 ºC to +105 ºC (equivalent to ±21 s of mo. deviation)
  XB: ± 5.0 x 10^{-6} / -40 ºC to +85 ºC (equivalent to ±13 s of mo. deviation)
  ± 8.0 x 10^{-6} / +85 ºC to +105 ºC (equivalent to ±21 s of mo. deviation)
- Clock output function
  Output frequency is selectable from 32.768 kHz, 1024 Hz, 1 Hz
- Wakeup timer function
  Selectable from 244 µs to 32 years (24 bit x 1 ch.)
  Timer source clock selectable from 1/60 Hz, 1 Hz, 64 Hz, 4096 Hz
  Auto release after interrupt output from /INT pin at timer completes
  This operation is auto repeat with a selected cycle, it can be used like a watchdog timer
- Time stamp function
  1 time stamped from year to second
  The time stamp trigger inputs from EVIN pin, self-monitoring and I²C software command
  EVIN pin has function of chattering-cancel
- Alarm function
  It is possible program from day to minute
- Internal state output function
  SOUT pin outputs selected flag-bit value or specified value (H or L)

Pin Function

Signal Name	I / O	Function
SOUT	Output	Internal state output pin
SCL	Input	Serial clock input pin
FOUT	Output	Frequency output pin (CMOS) (frequency selection: 32.768 kHz, 1024 Hz, 1 Hz)
EVIN	Input	Event input pin
V_{DD}	-	Power-supply pin
FOE	Input	The FOUT output control pin
/INT	Output	Interrupts output by Alarm and Timer events (N-ch. open drain)
GND	-	Ground pin
T2	-	Test pin in the factory (Do not connect externally)
SDA	Input / Output	Serial data input and output pin.

Terminal connection / External dimensions (Unit: mm)




Specifications (characteristics)

∗ Refer to application manual for details

■ Electrical Characteristics

Item	Symbol	Conditions		Min.	Typ.	Max.	Unit
Operating voltage	V_{DD}	-		1.6	3.0	5.5	V
Temp. compensated Voltage	V_{TEM}	-		1.5	3.0	5.5	V
Clock supply voltage	V_{CLK}	-		1.5	3.0	5.5	V
Operating temperature	T_a	-		-40	+25	+105	ºC
Stability	Δ f / f	XA	T_a = -40 ºC to +85 ºC		±3.4		x 10^{-6}
			T_a = +85 ºC to +105 ºC		±8.0		
		XB	T_a = -40 ºC to +85 ºC		±5.0		
			T_a = +85 ºC to +105 ºC		±8.0		
Current consumption (1)	I_{DD1}	fSCL = 0 Hz, /INT = V_{DD}, FOE = GND, FOUT: OFF, Temp. Compensation interval 2.0 s	V_{DD} = 5 V	-	0.4	1.6	µA
Current consumption (2)	I_{DD2}		V_{DD} = 3 V	-	0.35	1.5	

■ 32.768 kHz DTCXO Frequency temperature characteristics (Example)

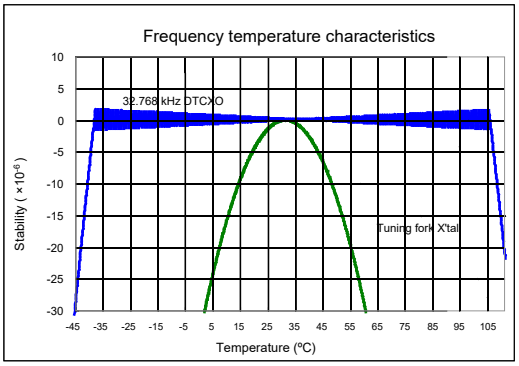

►Explanation of the mark that are using it for the catalog

	►Pb free.
	►Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
	►Designed for automotive general equipment.
	►Designed for automotive applications related to driving and safety.

NOTICE：PLEASE READ CAREFULLY BELOW BEFORE THE USE OF THIS DOCUMENT

1. The content of this document is subject to change without notice. Before purchasing or using Epson products, please contact with sales representative of Seiko Epson Corporation (“Epson”) for the latest information and be always sure to check the latest information published on Epson’s official web sites and resources.
2. This document may not be copied, reproduced, or used for any other purposes, in whole or in part, without Epson’s prior consent.
3. Information provided in this document including, but not limited to application circuits, programs and usage, is for reference purpose only. Epson makes no guarantees against any infringements or damages to any third parties’ intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, any intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
4. Epson has prepared this document carefully to be accurate and dependable, but Epson does not guarantee that the information is always accurate and complete. Epson assumes no responsibility for any damages you incurred due to any misinformation in this document.
5. Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for the purposes of military weapons development (e.g. mass destruction weapons), military use, or any other military applications. If exporting Epson products or our associated technologies, please be sure to comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A (EAR) and other export-related laws and regulations in Japan and any other countries and to follow their required procedures.
6. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document or for any damages (whether direct or indirect) incurred by any third party that you give, transfer or assign Epson products.
7. For more details or other concerns about this document, please contact our sales representative.
8. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

●Disclaimer

1. Epson products are designed for use in general electronic equipment applications that do not require extremely high reliability or safety.

2. Epson does not represent or warrant that its products will not cause a failure for any particular application, except for cases where the failure is a direct result caused by defects in materials and workmanship of this product.
If a product fails due to defects in materials and workmanship, to the maximum extent permitted by law, we will, at our sole discretion, refund or replace the affected product.

3. When products for used directly or indirectly in certain devices or applications (ex. Nuclear power, aerospace, infrastructure facilities, medical equipment, etc.) which are connected to or affect safety of human life or property, Customer is solely responsible for determining if the products and respective specifications are suitable for the intended use in particular customer applications.
Customer shall implement necessary and proper safety design and measures (including redundant design, malfunction prevention design, etc.) to ensure reliability and safety before using the products in/with customer’s Equipment.

4.For the products designed for automotive applications, the products comply with AEC-Q100 or AEC-Q200.
Products do not comply with ISO 26262 (Products are not categorized to ASIL A, B, C and D).

5. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
Furthermore, any defects caused by this are not covered by the warranty.

©Seiko Epson Corporation 2025