


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/26/10	
A		ADDED DIM.	10/27/17	AY/NC

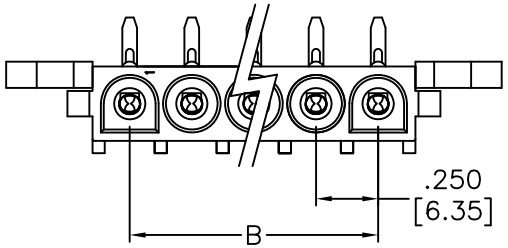


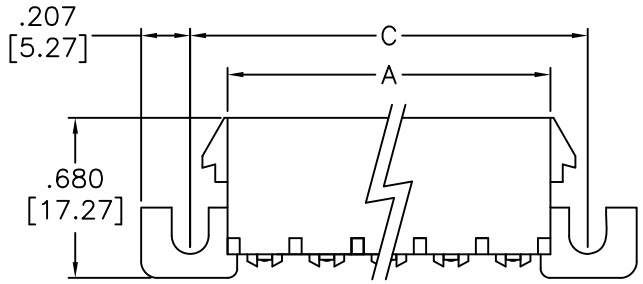





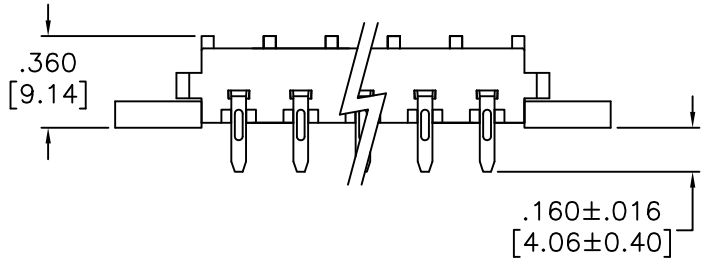

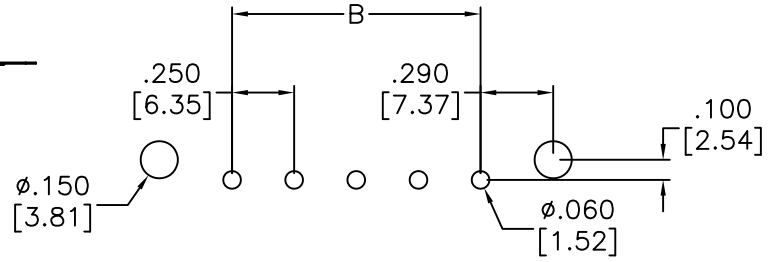

RECOMMENDED PCB LAYOUT

Positions: 2 thru 10
A = .250 [6.35] No. of Positions + .050 [1.27]
B = .250 [6.35] No. of Spaces
C = .250 [6.35] No. of Positions + .330 [8.38]

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: White
Contact: Phosphor Bronze, Tin plated
Electrical:
Voltage rating: 600 VAC
Current rating: 13 Amp (2~4P), 11 Amp (6~10P).
Dielectric withstanding voltage: 5000 VAC for 1 minute
Temperature Rating:
-55°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	10/26/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO BOARD HEADER, MALE WITH EARS 6.35MM, RIGHT ANGLE

SIZE	PART NO.	REV.
X	DME-M-XX-RA-E	-

REF: S00123T | SCALE: NTS | SHEET 1 OF 1