

DATE	REV	ECN	APP'D. BY
10/20/20	A0	RELEASED	ADB
–	–	–	–

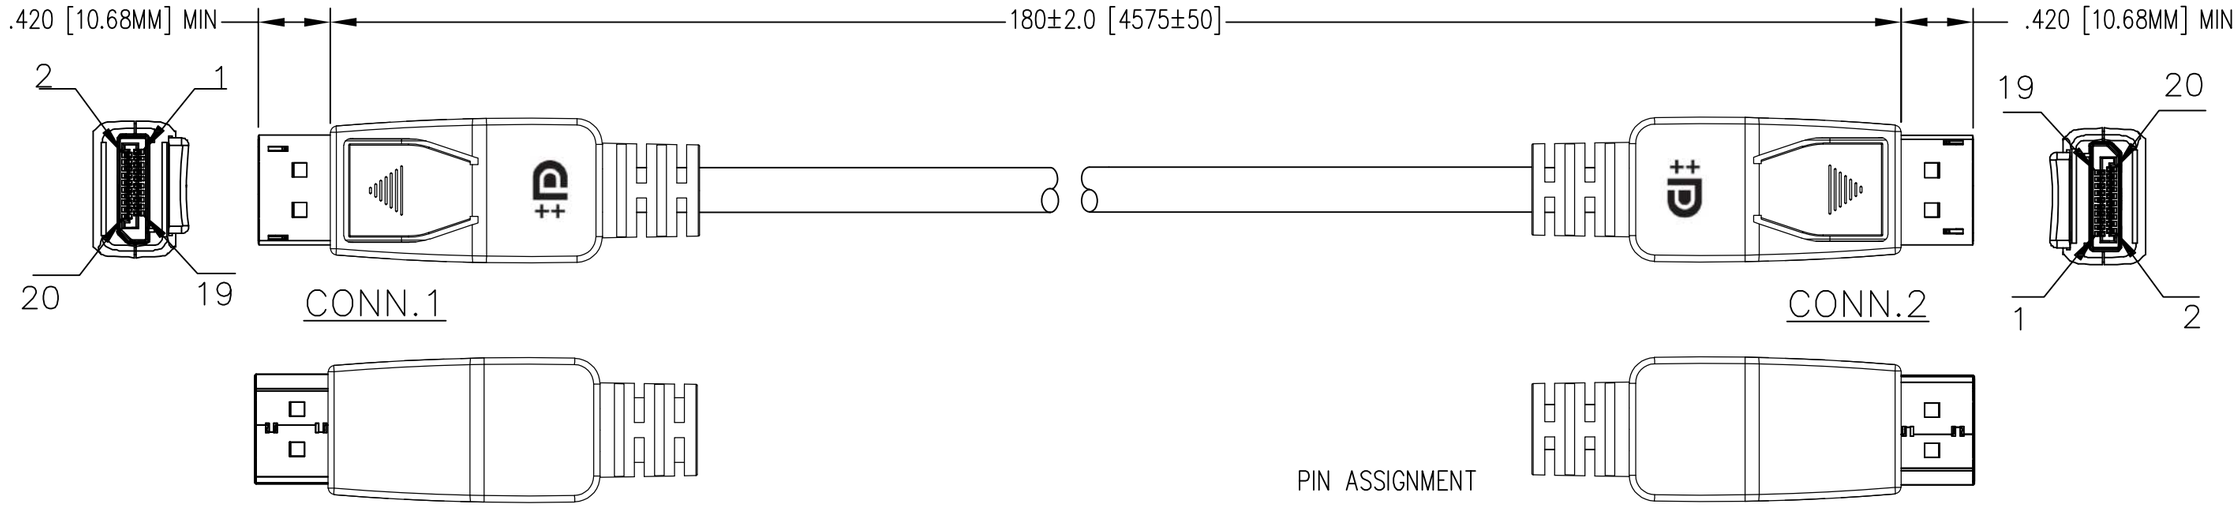


NOTES:

1. COMPLIANT WITH DISPLAYPORT 1.4 SPECIFICATION.
2. CONNECTOR COMPONENTS:
   TRANSPARENT DUST COVER
   INSIDE MOLDING: LDPE
   STRAIN RELIEF: 45P PVC, BLACK
   OUTSIDE MOLDING: ABS, BLACK
   SHELL PLATING: GOLD FLASH
   CONTACT: GOLD PLATING
   CABLE: DP1.4
   [26AWG(7/0.16TC)+EAM]*5P+26AWG(7/0.16TC)*4C+AEB(16/110.12 85%AL)
   OD: 0.33 [8.5] COLOR: BLACK
   CABLE PRINTING: DISPLAYPORT CABLE E342987 AWM STYLE 20276 80°C 30V VW-1
3. ELECTRICAL TESTING:
   100% OPEN & SHORT & CONTINUITY WIRE TEST
   CONTACT RESISTANCE: 5 OHM MAX.
   INSULATION RESISTANCE: 10M OHM MIN.
   HI-POT:100V DC/10ms
4. PACKAGING:
   ONE CABLE PER BAG



PIN ASSIGNMENT

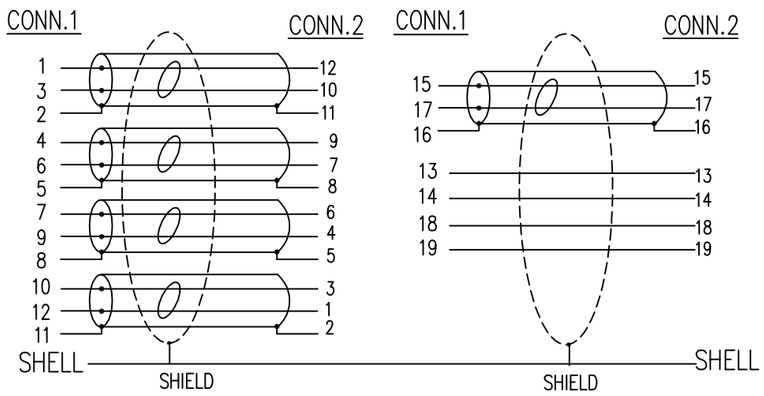

P/N	LENGTH
BC-4D4D015F	180 [4575]

RoHS 2002/95/EC

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°

SHEET NO. 1 OF 1

bel

206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
http://www.belfuse.com

TITLE: DISPLAY PORT 1.4 CABLE, MALE TO MALE, 15 FEET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

DRN BY:	JE	DATE	10/07/20
APPD BY:	ADB	DATE	10/20/20
DWG NO.	CT999228	REV.	A0

ASSEMBLY FORMAT REV. 6/3/05

AutoCAD