
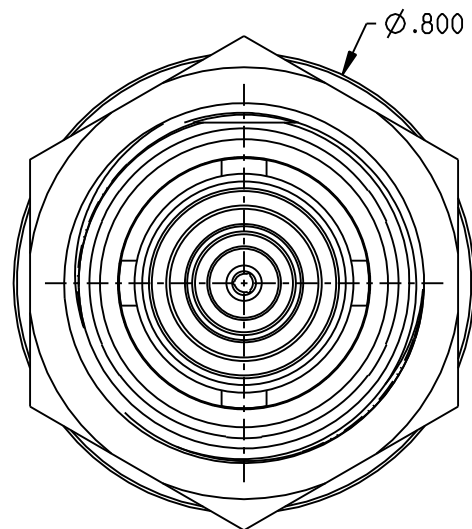


TRB JACK INTERFACE
PER MIL-STD-348
FIG. 201-2

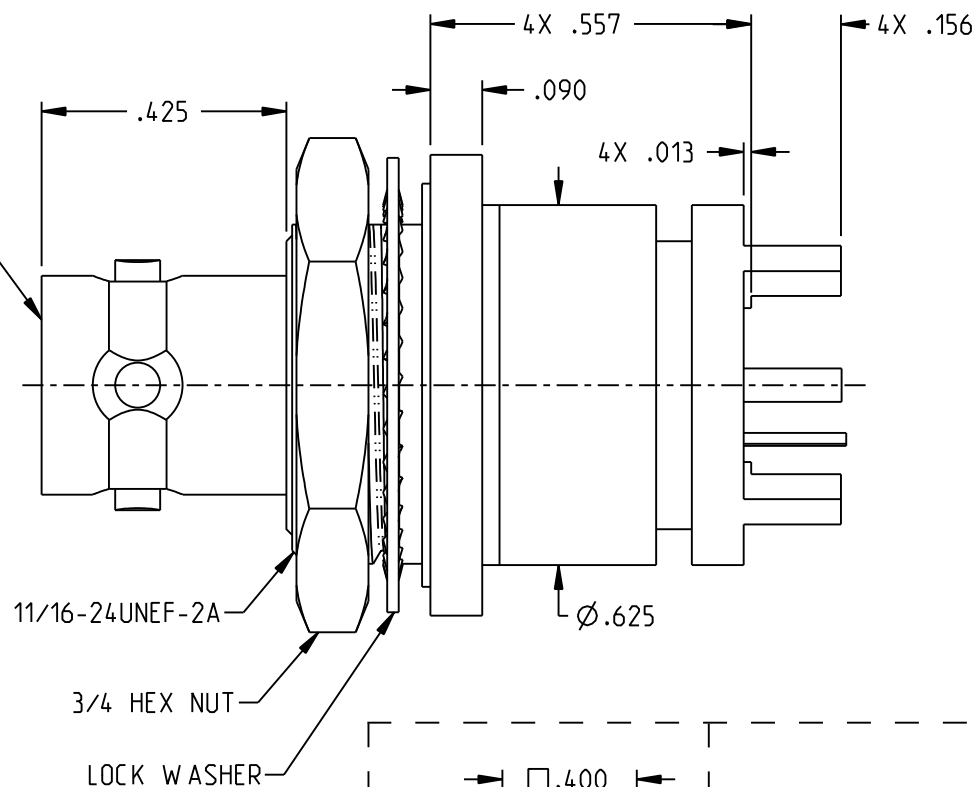

NOTES: UNLESS OTHERWISE SPECIFIED.


1. MATERIAL & FINISH:

- 1.1 BODY: TIN PLATED BRASS
- 1.2 INSULATOR & DIELECTRIC: PTFE (TEFLON)
- 1.3 INTERMEDIATE CONTACT: GOLD PLATED BRASS
- 1.4 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.5 GASKET: SILICONE RUBBER
- 1.6 MOUNTING HARDWARE: GOLD PLATED COPPER ALLOY

2. ELECTRICAL:

- 2.1 FREQUENCY (MAX): 500 MHZ
- 2.2 IMPEDANCE: NON-CONSTANT

3. PANEL NUT TORQUE (MAX): 35 INCH POUNDS

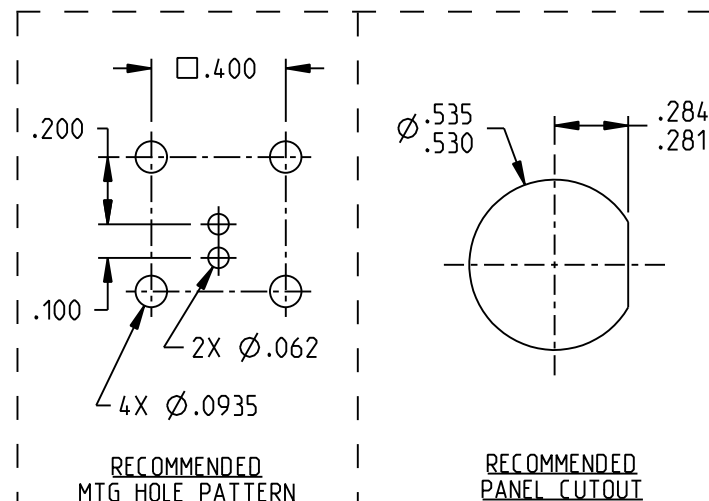

 NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	3RD ANGLE PROJECTION RoHS2 ☒ 2015/863/EU UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.02 .XXX ±.005 ANGLES ±2°	TROMPETER Title: TRB JACK, STRAIGHT, PC MT, BLKHD MT (REAR), INSULATED, 3 LUG Model No. CBBJ74 Size A DO NOT SCALE DRAWING Date: 9/21/2021 Sheet 1 OF 1		
--	--	--	--	--