


MODEL NO.	"A"	Ø"B"
CBBJR79TL	.24	.063
CBBJR79TLA	.34	.070



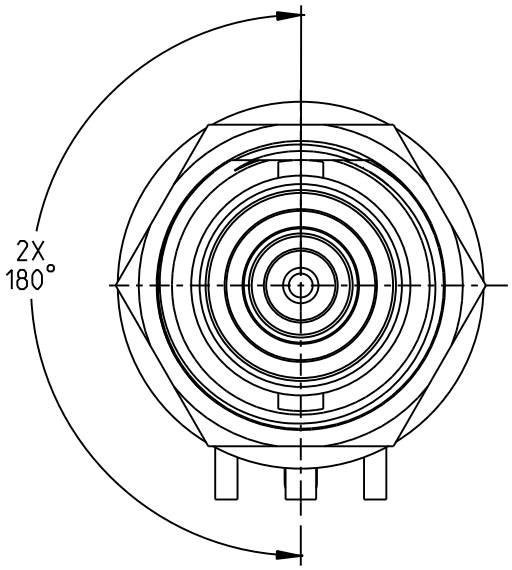

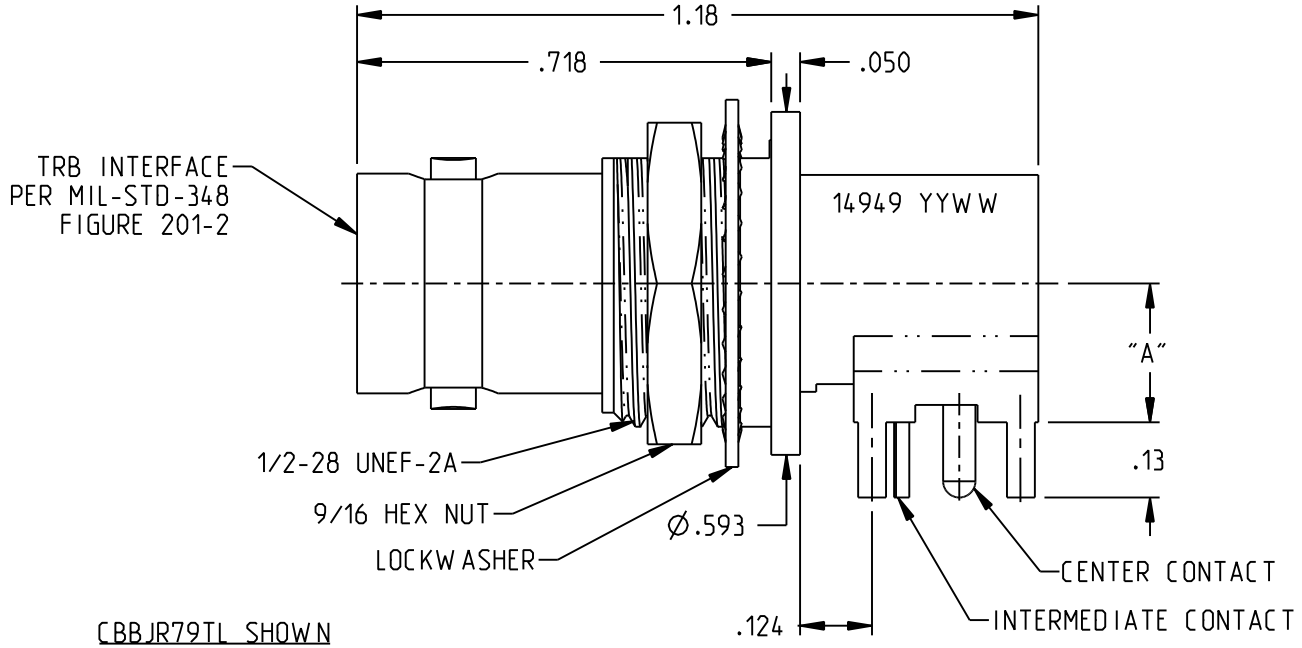

CBBJR79TL SHOWN


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND FINISH:
   1.1 BODY: TIN PLATED BRASS
   1.2 OUTER INSULATOR: PTFE (TEFLON)
   1.3 INTERMEDIATE CONTACT: GOLD PLATED BRASS
   1.4 DIELECTRIC: PTFE (TEFLON)
   1.5 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
   1.6 MOUNTING HARDWARE: TIN PLATED COPPER ALLOY


2. ELECTRICAL:
   2.1 IMPEDANCE: NON-CONSTANT
   2.2 FREUENCY (MAX): 500MHz

3. PANEL THICKNESS (MAX): .125

4. PANEL NUT TORQUE (MAX): 35 INCH POUNDS

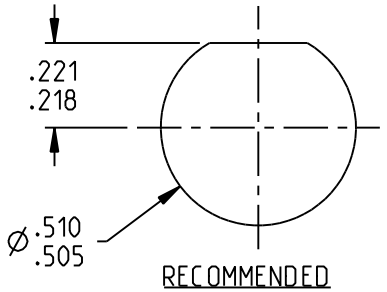

RECOMMENDED
PANEL CUTOUT

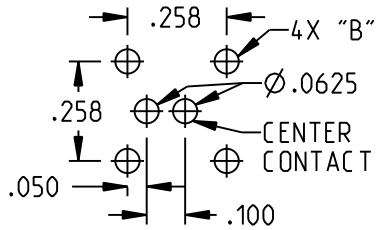

RECOMMENDED MTG
HOLE PATTERN

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018

3RD ANGLE PROJECTION

RoHS2 ☑
2015/863/EU

UNLESS OTHERWISE SPECIFIED
UNITS: INCH
.XX ±.02
.XXX ±.005
ANGLES ±2°

TROMPETER

Title: TRB RIGHT ANGLE CIRCUIT BOARD JACK

Model No. CBBJR79TL/A

Size	DO NOT SCALE DRAWING	Date:	Sheet
A		10/18/2021	1 OF 1

Please read our datasheet & drawing disclaimer here.