



MODEL NUMBER	KEYING LETTER	"A°"	"B°"	"C°"
5-0023-1	T	100	150	110
5-0023-2	U	120	130	110
5-0023-3	V	115	130	115
5-0023-4	W	125	110	125
5-0023-5	X	130	100	130
5-0023-6	Y	110	140	110
5-0023-7	Z	100	160	100
5-0023-8	S	135	135	90
5-0023-9	NONE	120	120	120



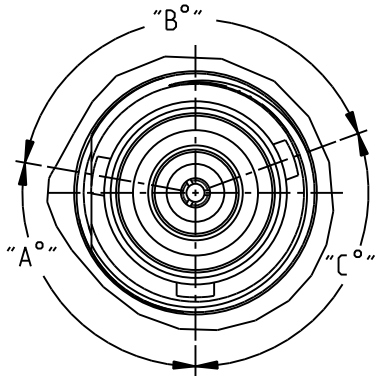

KEYING DETAIL

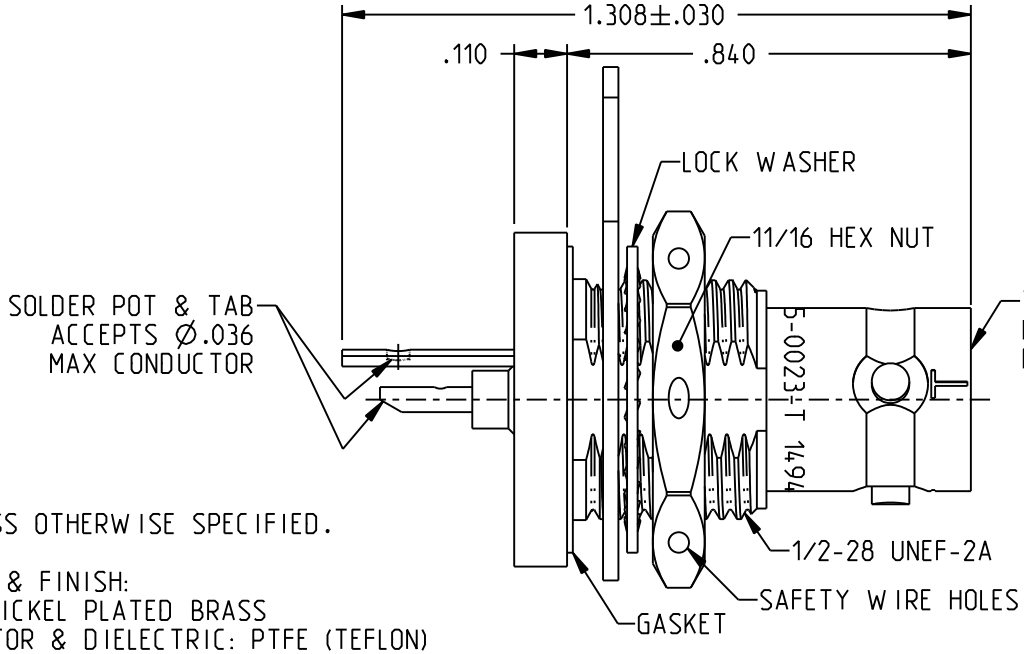

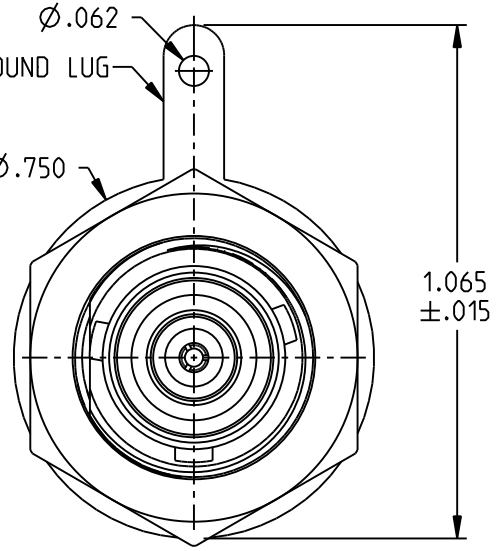

505-0745-1 SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED.


1. MATERIAL & FINISH:
 1.1 BODY: NICKEL PLATED BRASS
 1.2 INSULATOR & DIELECTRIC: PTFE (TEFLON)
 1.3 INTERMEDIATE CONTACT: GOLD PLATED BRASS
 1.4 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
 1.5 MOUNTING HARDWARE: NICKEL PLATED COPPER ALLOY
 1.6 GASKET: SILICONE RUBBER

2. ELECTRICAL:
 2.1 FREQUENCY (MAX): 500 MHz
 2.2 IMPEDANCE: NON-CONSTANT

3. TEST PER TT-09.

4. PANEL NUT TORQUE (MAX): 35 INCH POUNDS

5. PANEL THICKNESS (MAX): .208

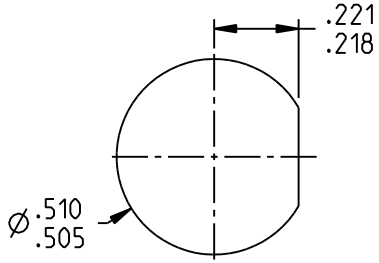

RECOMMENDED
PANEL CUTOUT

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018

3RD ANGLE PROJECTION

RoHS2 ☑ 2015/863/EU

UNLESS OTHERWISE SPECIFIED UNITS: INCH
.XX ±.02
.XXX ±.010
ANGLES ±2°

TROMPETER

Title: TRB JACK, SOLDER POT, BULKHEAD MOUNT

Model No. 5-0023

Size A | DO NOT SCALE DRAWING | Date: 1/24/2024 | Sheet 1 OF 1

Please read our datasheet & drawing disclaimer here.