
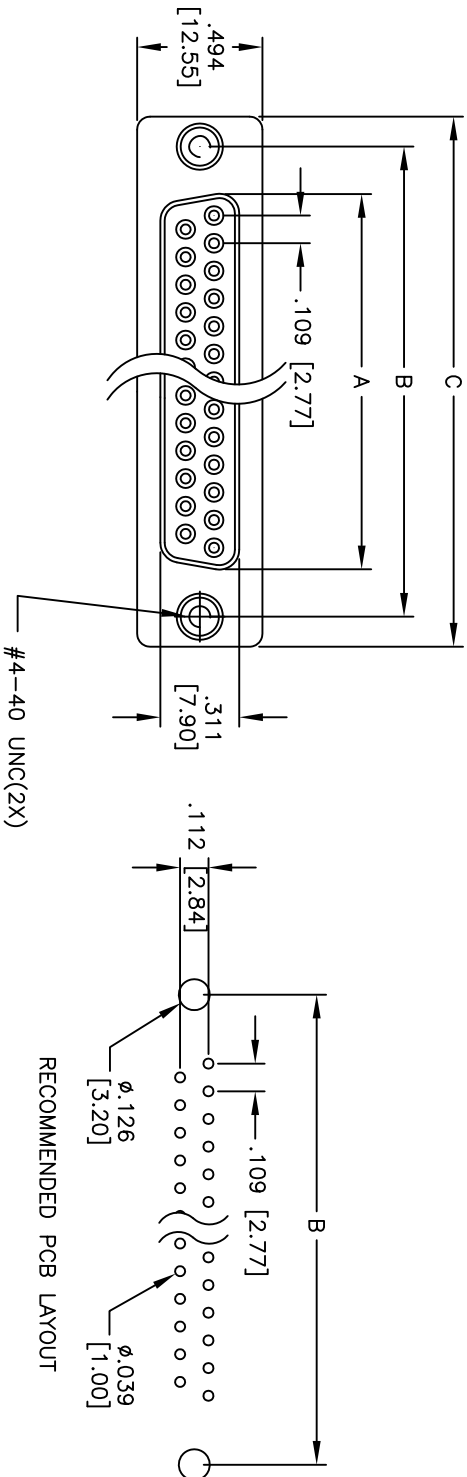



Rev	AWO #	Description	Date	Appr
-		RELEASED	4/18/05	
A		UPDATED	4/19/11	
B		REVISED DIM.	10/12/11	

APPROVED: _____
DATE: _____ TITLE: _____

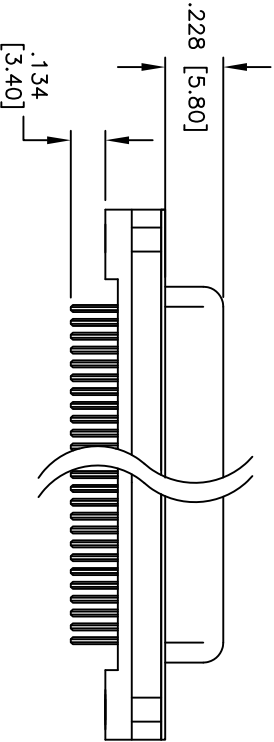

Dimensions			
Positions	A	B	C
09	.643 [16.33]	.984 [24.99]	1.213 [30.81]
15	.971 [24.66]	1.312 [33.32]	1.541 [39.14]
25	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]
37	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: SPCO
Hardware: Brass, Nickel plated
Plating:
Gold flash over Nickel underplate overall.
Electrical:
Operating voltage: 250 VAC
Current rating: 1 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms @ 500VAC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -65°C to +125°C
Environmental:
Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	Ø.X	± .10	TITLE D-SUB, SOCKET, FLUSH MOUNT #4-40 THREADED FLUSH INSERTS			
.XX	± .020	Ø.XX	± .015				
.XXX	± .015	Ø.XXX	± .010				
APPROVALS				DATE			
DRAWN	SS	4/18/05					
CHECKED							
APPROVED							
REF:	X						
SIZE				PART NO.			
X				DXXX-SA-M2			
SCALE: NTS				SHEET 1 OF 1			
				REV. B			

