
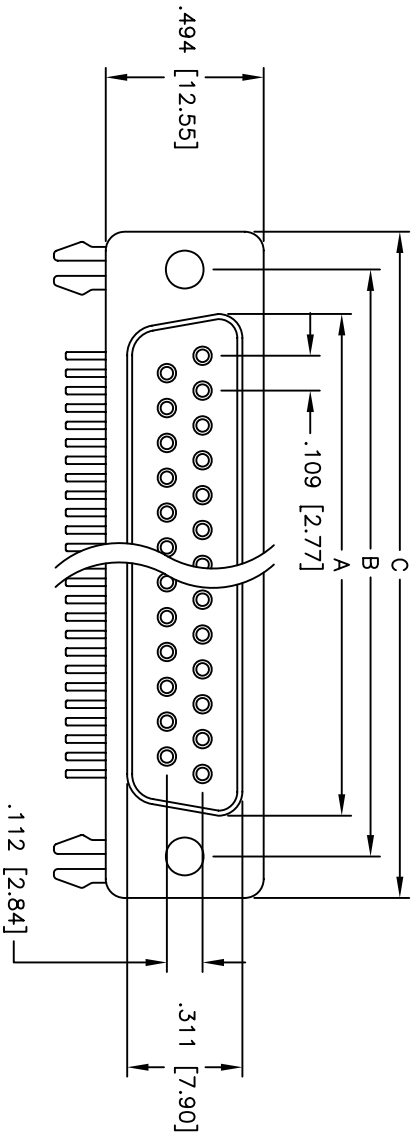
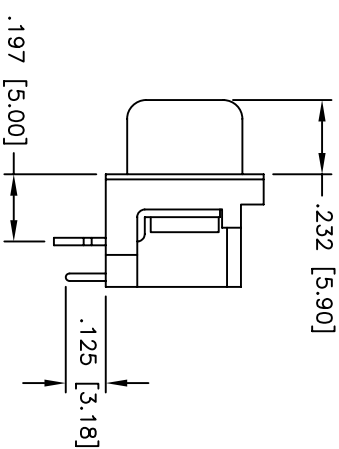
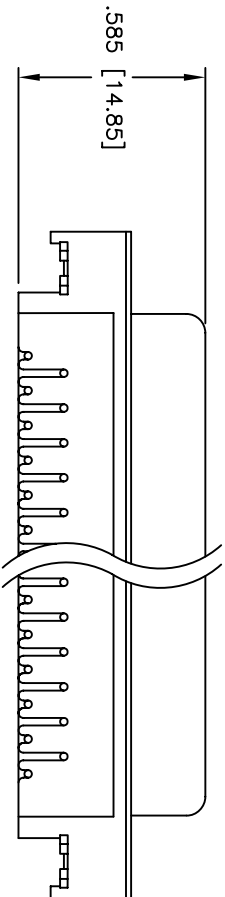


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/22/05	

APPROVED: _____

DATE: _____ TITLE: _____

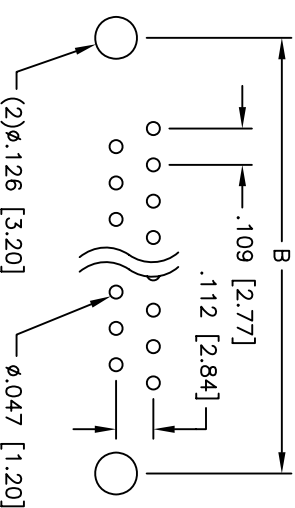

PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Tin plated

Hardware: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

DXXX	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
DE09	9	.643 [16.33]	.984 [24.99]	1.213 [30.81]
DB25	25	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.197 [5.00] SLIMLINE D-SUB SOCKET
FORKED BOARDLOCKS, #4-40 INSERTS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE .197 [5.00] SLIMLINE D-SUB SOCKET FORKED BOARDLOCKS, #4-40 INSERTS	
.X INCHES ± .10	ØX ± .10	DATE	
.XX ± .020	ØXX ± .015	DATE	
.XXX ± .015	ØXXX ± .010	DATE	
APPROVALS		DATE	
DRAWN	SS	4/22/05	
CHECKED			
APPROVED			
SIZE X		PART NO. DXXX-SN-24	REV. -
REF:		SCALE: NTS	SHEET 1 OF 1