EM2525 Series
EuroMag Terminal Blocks

Pluggable Block (Mates with EM2535 Series); 5.00 Centers



EM252503


SPECIFICATIONS

Rating: 16A, 300V
Center Spacing: 0.197" (5.00mm)
Consult factory for 0.394" (10.00mm)
Wire Range: #12-24 AWG
Housing Material: UL rated 94V0 Thermoplastic
Contact Material: Brass Tin-Plated
Screw Size: M3.0 Zinc-Plated Steel
Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.
Torque Rating: 7 lb-in.
Construction: Mold-to-Length
Connector Style: Rising Cage and Screw
Agency Information: c UL us File E62622; CE Certified

Poles	L (mm)	Poles	L (mm)
02	10.0	14	70.0
03	15.0	15	75.0
04	20.0	16	80.0
05	25.0	17	85.0
06	30.0	18	90.0
07	35.0	19	95.0
08	40.0	20	100.0
09	45.0	21	105.0
10	50.0	22	110.0
11	55.0	23	115.0
12	60.0	24	120.0
13	65.0		

To convert to inches, divide by 25.4

Dimensions - in (mm)

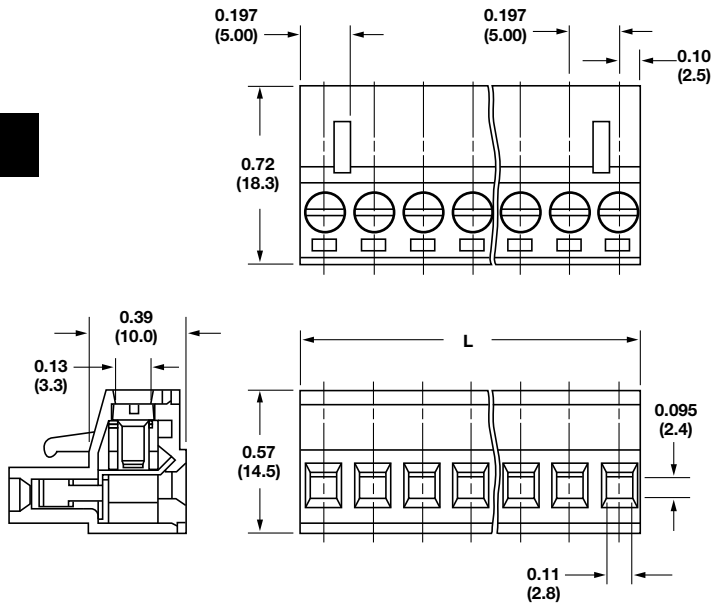

Part Numbering System

Series

EM2525

# of Positions

□□

02 to **24**

Mating Header: EM2535 pg. 88