


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/14/11	
A		ADDED SPEC.	6/27/13	



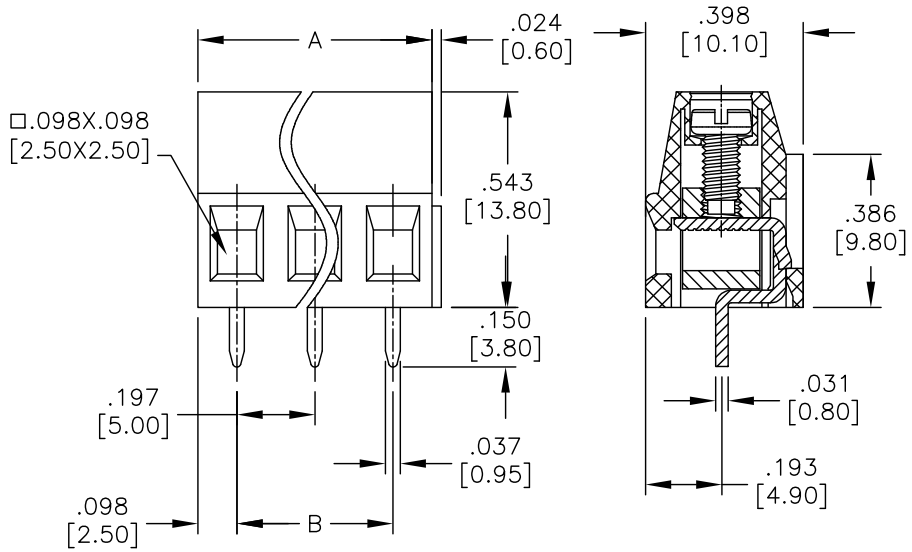

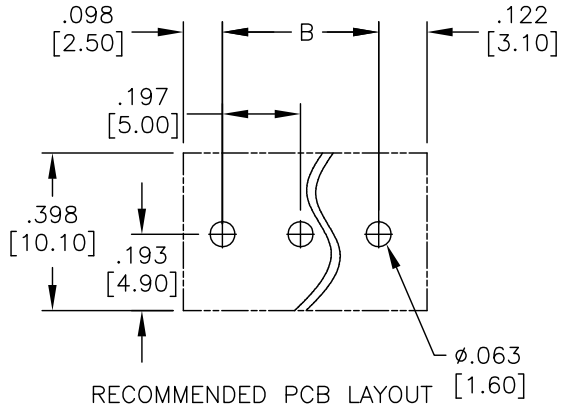

RECOMMENDED PCB LAYOUT

	Tolerance
2–6P	±.006 [0.15]
7–12P	±.008 [0.20]
13–18P	±.012 [0.30]
19–24P	±.016 [0.40]

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Screw: M2.5, Steel, Zn plated.
Contact: Brass, Tin plated.
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Mechanical:
Solid wire (AWG): 12–24
Stranded wire (AWG): 12–24
Withstanding Voltage: 1.6KV
Wire strip length: 6–7mm
Temperature Rating:
Operating temperature: –40°C to +115°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 2 thru 24
A = .197 [5.00] X No. of Positions
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/14/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE: EURO BLOCK, .197" [5.00] PITCH

SIZE	PART NO.	REV.
X	EB20-XX-C	-

REF: S00007T | SCALE: NTS | SHEET 1 OF 1