

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/2/20	


APPROVED: _____

DATE: _____ TITLE: _____

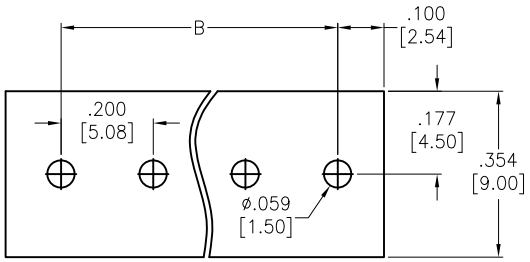


RECOMMENDED PCB LAYOUT

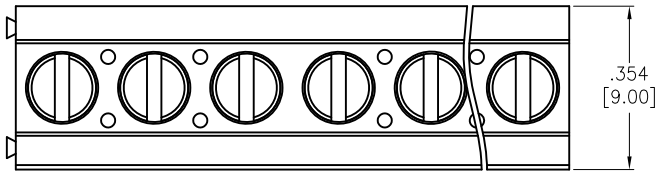

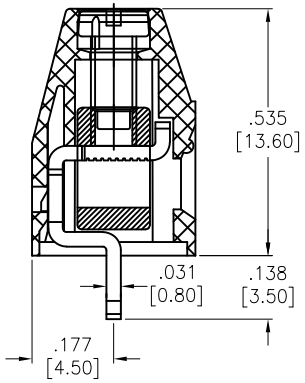

SECTION A–A

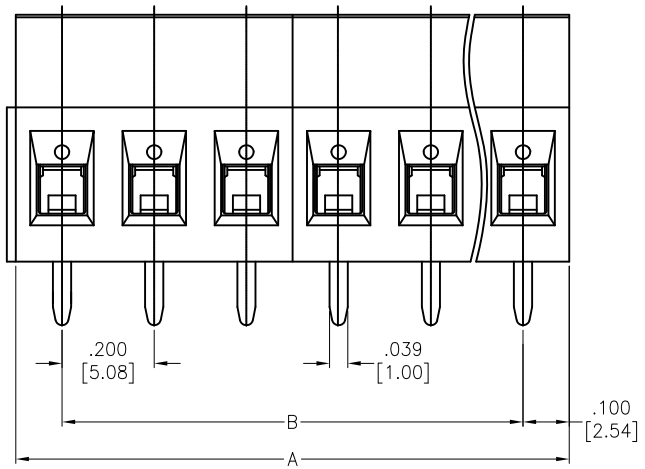

SPECIFICATIONS:

Material:
Insulator: PA66, rated UL 94V–0
Insulator color: Green
Contacts: Copper Alloy, Tin plated
Screw: M2.5
Electrical:
Voltage rated: 300V
Current rating: 16A
Dielectric withstanding voltage: 1,600V for 1 minute
Mechanical:
Wire range: 22–12AWG
Torque: 0.4Nm max
Wire strip length: 6–7mm
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24
A = .200 [5.08] x No. of Positions
B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	7/2/20
CHECKED	BL	7/2/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
EURO BLOCK, .197 [5.08] PITCH

SIZE	PART NO.	REV.
X	EBAFA-XX-D	-

REF: S00067C | SCALE: NTS | SHEET 1 OF 1