

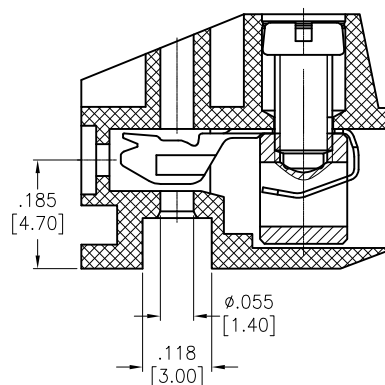


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/12/15	
A		UPDATED DRAWING	6/12/17	HR/AC

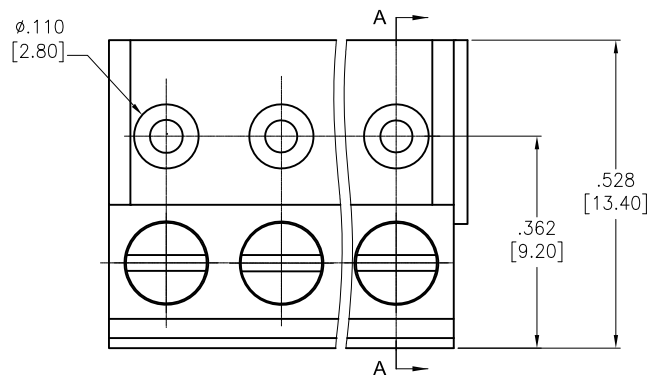

SECTION A-A

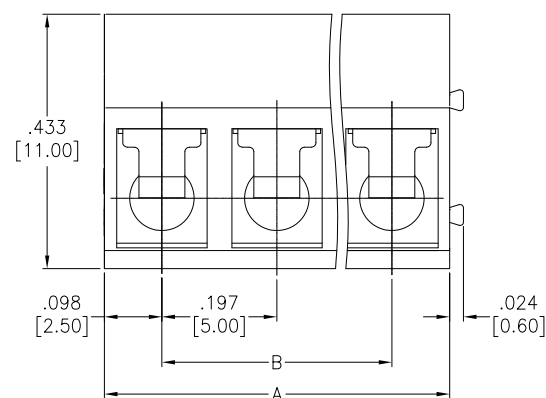

SPECIFICATIONS:

Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Black
Clamp: Phosphor Bronze, Nickel plated
Cage: Brass, Nickel plated
Screw: M2.5 Steel, Zinc plated
Electrical:
Voltage rated: 300 V
Current rated: 10 A
Contact resistance: 20 mΩ
Insulation resistance: 500 MΩ @ 500 VDC
Wire range: 28-16AWG, 1.5mm²
Withstanding voltage: 2000V AC/1 Min
Torque: 0.4N-m, 3.6 Lb-In
Strip length: 4.5-5mm
Temperature Rating:
Operating temperature: -30°C to +120°C
Environmental:
Lead free, RoHS compliant.



Positions: 2 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
INCHES HOLES					
.X ± .10	Ø.X ±.10				
.XX ± .020	Ø.XX ±.015		TITLE		
.XXX ± .015	Ø.XXX ±.010				
APPROVALS		DATE			
DRAWN	AY	3/12/15			
CHECKED	YC	3/12/15	EURO BLOCK, .197 [5.00] PITCH		
APPROVED			SIZE X	PART NO. EBJA-XX-C-BK	REV. A
REF: S00067C			SCALE: NTS	SHEET 1 OF 1	