




APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_


| Rev | AWO # | Description    | Date     | Appr  |
|-----|-------|----------------|----------|-------|
| -   |       | RELEASED       | 08/01/13 |       |
| A   |       | UPDATED SPEC.  | 7/20/15  | HR/AY |
| B   |       | UPDATE DRAWING | 9/13/18  | AY/DH |

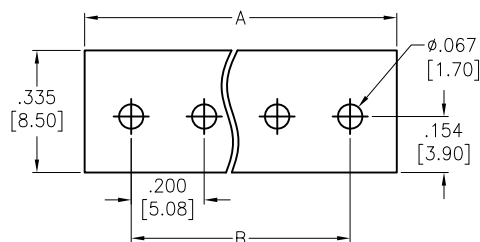

RECOMMENDED PCB LAYOUT

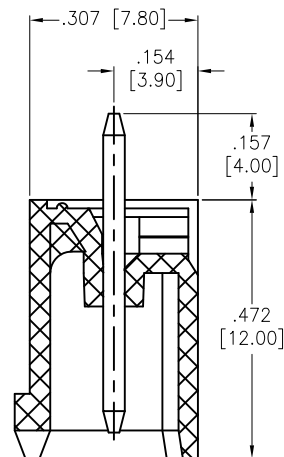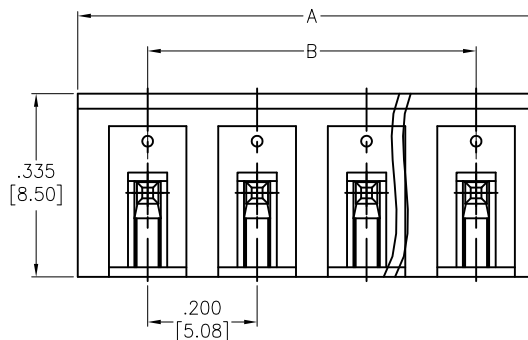

SECTION A-A

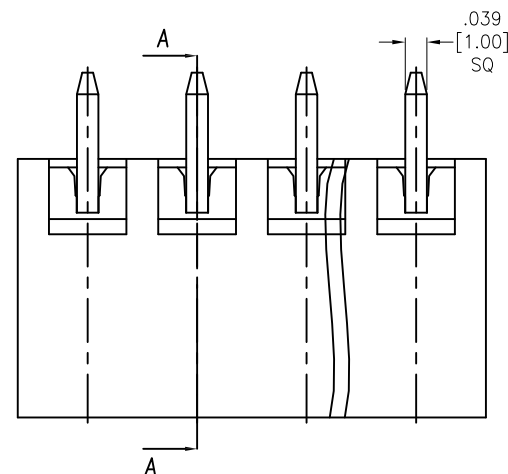

Positions: 02 thru 24

A = .200 [5.08] x No. of Positions + .055 [1.40]

B = .200 [5.08] x No. of Spaces

# SPECIFICATIONS:

## Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Brass, Tin plated.

## Electrical:

Voltage rated: 300 VAC

Current rated: 15 Amp

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

## Temperature Rating:

-40°C to +105°C

## Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MM [INCHES]  
TOLERANCES: EXCEPT AS NOTED

| INCHES      | HOLES        |
|-------------|--------------|
| .X ± .10    | Ø.X ± .10    |
| .XX ± .020  | Ø.XX ± .015  |
| .XXX ± .015 | Ø.XXX ± .010 |

| APPROVALS |    | DATE     |
|-----------|----|----------|
| DRAWN     | AY | 10/17/13 |
| CHECKED   | NP | 10/17/13 |
| APPROVED  |    |          |

**ADAM  
TECH**  
INTERCONNECTS

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE  
TERMINAL BLOCK, SOCKETS .200 [5.08] PITCH  
VERTICAL, CLOSE TYPE

|              |                         |              |
|--------------|-------------------------|--------------|
| SIZE<br>X    | PART NO.<br>EBPA-XX-D-C | REV.<br>B    |
| REF: S00067C | SCALE: NTS              | SHEET 1 OF 1 |