
ED1550/X (3.5 mm)
EDZ1550/X (3.81 mm)



2-20(16) poles, Spacing 3.5 mm or 3.81 mm
insert required no. of poles **x**
How to order see page 5

Ratings:		
Rated Voltage	**300 V**	**160 V**
Rated Current	**8 A**	**9 A (T60)**
Wire Size	**AWG 28-16**	**1.5 mm²**
Test Voltage		**4 kV/3**
Rated Torque/ScrewSize		**0.4 Nm/M2**
Max. Rated Cross Section		
Single Wire (solid)		**1.5 mm²**
Stranded Wire (flexible)		**1.0 mm²**
Stranded wire with Ferrules		**1.0 mm²**
Dimensions		
Spacing		**3.5 mm (3.81 mm)**
Stripped Length		**7.0 mm**
Materials		
Insulating Material		**PA**
Flammability Class		**UL94 V-0**
Temperature Range		**-30°C/+105°C**
Terminal Block		**CuZn**
Contact		**CuSn**
Color		
Green		

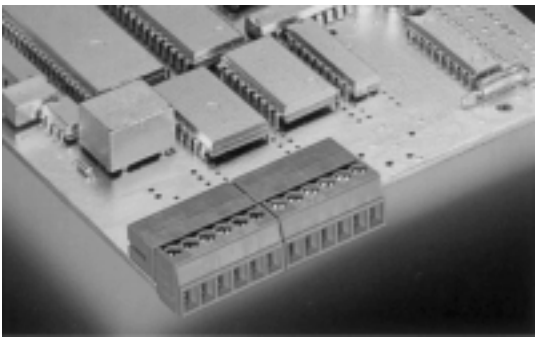