



SIGN	DATE	DESCRIPTION	APPROVER
1	02/02'07	Soldering temperature changed from 245° to 250°	Tason
2	02/02'07	Part NO is Changed	Tason
3	07/04'09	Current,torque,dperating temperature are changed	JODY
4	11/11'09	Wire guard solder pin is changed from Brass to Copper	Aaron
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



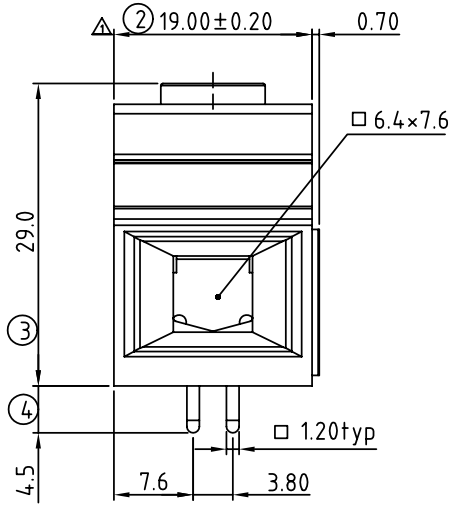

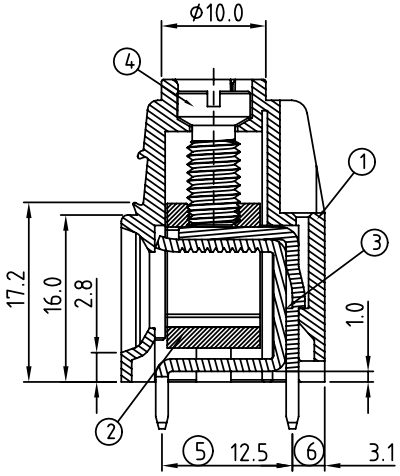

SECTION A-A

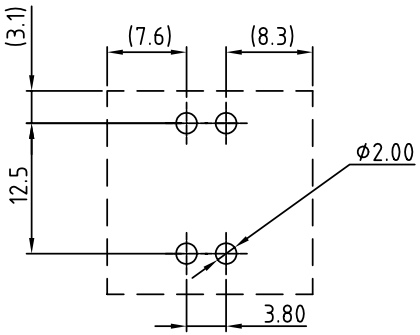

P.C.B Layout

Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- ⚠4 Item 3 Wire guard solder pin : Copper ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-"slot type

Electrical

- Voltage rating : 600V
- ⚠3 Current rating : 100A
- Wire range :
- Solid wire (AWG) : 3-18
- Stranded wire (AWG) : 3-18
- ⚠3 Torque (LB-In.) : 30
- Screw : M5
- Wire strip length : 12~15mm
- Withstanding Moltage : 2.2KV
- ⚠3 ⚠1 Operating temperature : -40°C+115°C
- Soldering temperature : 250°C+10°C/5 Sec
- Safety Approval: cULus

⚠2 EJ 01 D 1 x 1 xxxx G

x	0	Black	
	5	Green (RAL 6018/T)	
	6	Blue	
	8	Grey (RAL 7035/D)	
xxxx	0000	"@"Logo (Standard)	
	000A	"ANYTEK"Logo	
		Any special item by customer request, please contact sales department.	
G			RoHS Pb<40,000ppm

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	EJ 1 Pole Series					
PART NO.	EJ01D1X1xxxxG			DWG NO.	8EJ0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Aaron 2009.11.11	Aaron 2009.11.11	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: E		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°