
G3VM-61H1

MOS FET Relays

MOS FET Relays Designed for Switching Minute Signals and Analog Signals.

- **Continuous load current of 400 mA.**

RoHS compliant

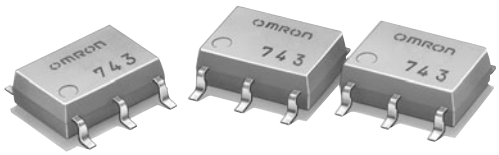


Note: The actual product is marked differently from the image shown here.

■ Application Examples

- **Semiconductor test equipment**
- **Test & Measurement equipment**
- **Communication equipment**
- **Data loggers**

■ Terminal Arrangement/Internal Connections

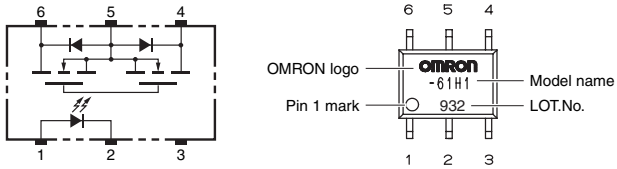

Note: The actual product is marked differently from the image shown here.

■ List of Models

Package type	Contact form	Terminals	Load voltage (peak value) ✻	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
SOP6	1a (SPST-NO)	Surface-mounting Terminals	60 V	**G3VM-61H1**	75	-
				G3VM-61H1 (TR)	-	2,500


✻ The AC peak and DC value are given for the load voltage.

■ Absolute Maximum Ratings (Ta = 25°C)

Item			Symbol	Rating	Unit	Measurement conditions
Input	LED forward current		I_F	50	mA	
	Repetitive peak LED forward current		I_{FP}	1	A	100 μs pulses, 100 pps
	LED forward current reduction rate		ΔI_F/°C	−0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage		V_R	5	V	
	Connection temperature		T_J	125	°C	
Output	Load voltage (AC peak/DC)		V_{OFF}	60	V	
	Continuous load current	Connection A	I_O	400	mA	Connection A: AC peak/DC Connection B and C: DC
		Connection B		400		
		Connection C		800		
	ON current reduction rate	Connection A	ΔI_O/°C	−4.0	mA/°C	Ta ≥ 25°C
		Connection B		−4.0		
		Connection C		−8.0		
	Connection temperature		T_J	125	°C	
Dielectric strength between I/O (See note 1.)			V_{I-O}	1500	Vrms	AC for 1 min
Ambient operating temperature			Ta	−40 to +85	°C	With no icing or condensation
Ambient storage temperature			Tstg	−55 to +125	°C	With no icing or condensation
Soldering temperature			-	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

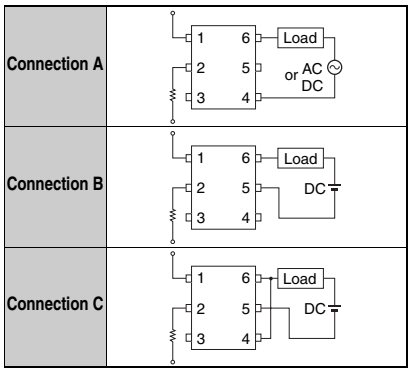

■ Electrical Characteristics (Ta = 25°C)

Item			Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage		V_F	1.0	1.15	1.3	V	I_F = 10 mA
	Reverse current		I_R	-	-	10	μA	V_R = 5 V
	Capacity between terminals		C_T	-	30	-	pF	V = 0, f = 1 MHz
	Trigger LED forward current		I_{FT}	-	1.6	3	mA	I_O = 400 mA
Output	Maximum resistance with output ON	Connection A	R_{ON}	-	1	2	Ω	I_F = 5 mA, I_O = 400 mA
		Connection B		-	0.5	1	Ω	I_F = 5 mA, I_O = 400 mA
		Connection C		-	0.25	-	Ω	I_F = 5 mA, I_O = 800 mA
	Current leakage when the relay is open		I_{LEAK}	-	-	1.0	μA	V_{OFF} = 60 V
	Capacity between terminals		Coff	-	130	-	pF	V = 0, f = 1 MHz
Capacity between I/O terminals			C_{I-O}	-	0.8	-	pF	f = 1 MHz, V_S = 0 V
Insulation resistance between I/O terminals			R_{I-O}	1000	-	-	MΩ	V_{I-O} = 500 VDC, RoH ≤ 60 %
Turn-ON time			t_{ON}	-	0.8	2.0	ms	I_F = 5 mA, R_L = 200 Ω, V_{DD} = 20 V (See note 2.)
Turn-OFF time			t_{OFF}	-	0.1	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times




■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	-	-	48	V
Operating LED forward current	I_F	5	7.5	25	mA
Continuous load current (AC peak/DC)	I_O	-	-	400	mA
Ambient operating temperature	Ta	–20	-	65	°C

■ Engineering Data


LED forward current vs. Ambient temperature

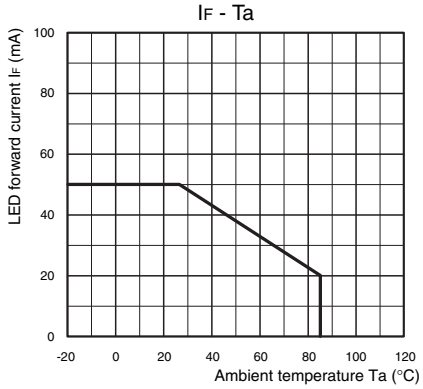


Continuous load current vs. Ambient temperature

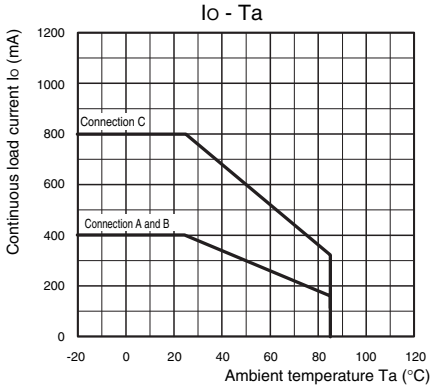


LED forward current vs. LED forward voltage

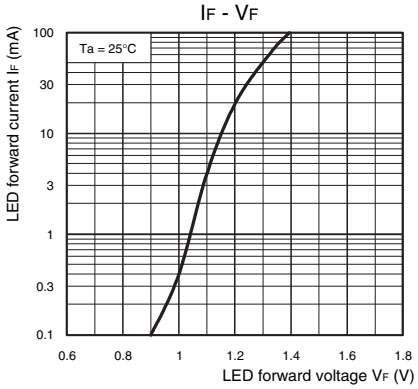


Continuous load current vs. On-state voltage

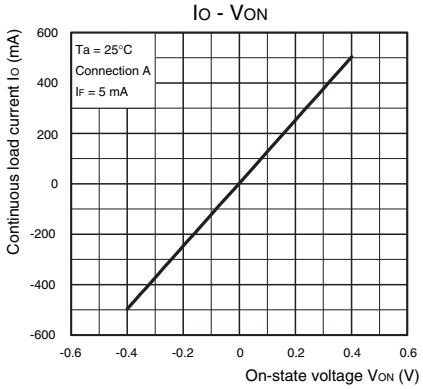


On-state resistance vs. Ambient temperature

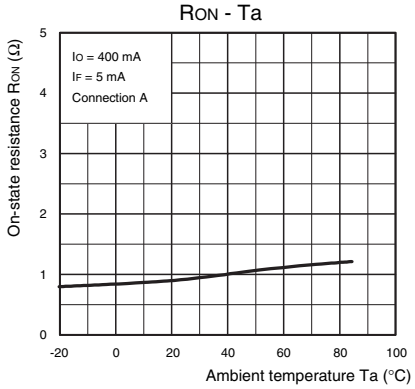


Trigger LED forward current vs. Ambient temperature

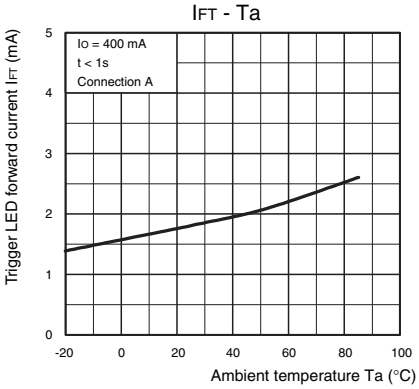


Turn ON, Turn OFF time vs. LED forward current

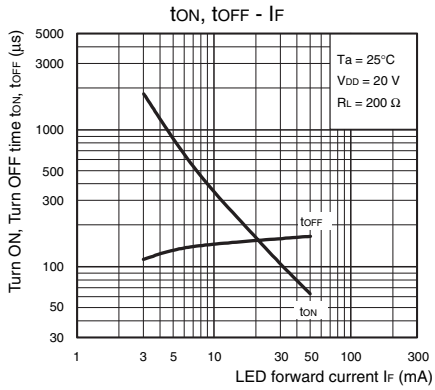

Turn ON, Turn OFF time vs. Ambient temperature

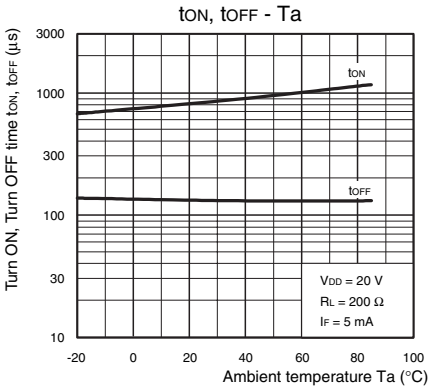

Current leakage vs. Ambient temperature

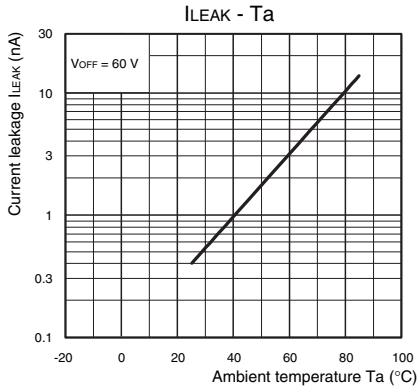

■ Safety Precautions


- Refer to **"Common Precautions"** for all G3VM models.

Appearance/Dimensions SOP6 type

■ Appearance

SOP (Small Outline Package)


SOP6

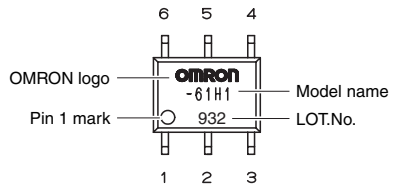

Note: The actual product is marked differently from the image shown here.


■ Dimensions

(Unit: mm)




Surface-mounting Terminals

Weight: 0.13 g

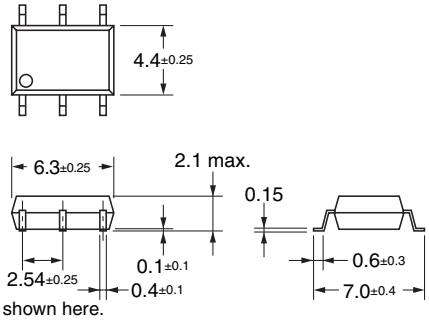

Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY **Contact: www.omron.com/ecb**

Cat. No. K156-E1-01

0412(0412)(O)