ESM4045DV

NPN DARLINGTON POWER MODULE

- HIGH CURRENT POWER BIPOLAR MODULE
- VERY LOW R_{th} JUNCTION CASE
- SPECIFIED ACCIDENTAL OVERLOAD AREAS
- ULTRAFAST FREEWHEELING DIODE
- INSULATED PACKAGE (UL COMPLIANT)
- EASY TO MOUNT
- LOW INTERNAL PARASITIC INDUCTANCE

APPLICATIONS:

- MOTOR CONTROL
- SMPS & UPS
- DC/DC & DC/AC CONVERTERS
- WELDING EQUIPMENT



ISOTOP

INTERNAL SCHEMATIC DIAGRAM



Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CEV}	Collector-Emitter Voltage (V_{BE} = -5 V)	600	V
$V_{CEO(sus)}$	Collector-Emitter Voltage (I_B = 0)	450	V
V_{EBO}	Emitter-Base Voltage (I_C = 0)	7	V
I_C	Collector Current	42	A
I_{CM}	Collector Peak Current (t_p = 10 ms)	63	A
I_B	Base Current	4	A
I_{BM}	Base Peak Current (t_p = 10 ms)	8	A
P_{tot}	Total Dissipation at T_c = 25 °C	150	W
T_{stg}	Storage Temperature	-55 to 150	°C
T_j	Max. Operating Junction Temperature	150	°C

THERMAL DATA

$R_{thj\text{-}case}$	Thermal Resistance Junction-case (transistor)	Max	0.83	°C/W
$R_{thj\text{-}case}$	Thermal Resistance Junction-case (diode)	Max	1.5	°C/W
$R_{thc\text{-}h}$	Thermal Resistance Case-heatsink With Conductive Grease Applied	Max	0.05	°C/W

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CER} #	Collector Cut-off Current (R_{BE} = 5 Ω)	V_{CE} = V_{CEV} V_{CE} = V_{CEV} T_j = 100 °C			1.5 20	mA mA
I_{CEV} #	Collector Cut-off Current (V_{BE} = -5)	V_{CE} = V_{CEV} V_{CE} = V_{CEV} T_j = 100 °C			1 13	mA mA
I_{EBO} #	Emitter Cut-off Current (I_C = 0)	V_{EB} = 5 V			1	mA
$V_{CEO(SUS)}$*	Collector-Emitter Sustaining Voltage (I_B = 0)	I_C = 0.2 A L = 25 mH V_{clamp} = 450 V	450			V
h_{FE}*	DC Current Gain	I_C = 35 A V_{CE} = 5 V		220		
$V_{CE(sat)}$*	Collector-Emitter Saturation Voltage	I_C = 25 A I_B = 0.5 A I_C = 25 A I_B = 0.5 A T_j = 100 °C I_C = 35 A I_B = 2 A I_C = 35 A I_B = 2 A T_j = 100 °C		1.15 1.3 1.4 1.5	 2 2	V V V V
$V_{BE(sat)}$*	Base-Emitter Saturation Voltage	I_C = 35 A I_B = 2 A I_C = 35 A I_B = 2 A T_j = 100 °C		2.3 2.3	 3	V V
di_C/dt	Rate of Rise of On-state Collector	V_{CC} = 300 V R_C = 0 t_p = 3 µs I_{B1} = 0.75 A T_j = 100 °C	200	250		A/µs
V_{CE}(3 µs)	Collector-Emitter Dynamic Voltage	V_{CC} = 300 V R_C = 12 Ω I_{B1} = 0.75 A T_j = 100 °C		4.5	8	V
V_{CE}(5 µs)	Collector-Emitter Dynamic Voltage	V_{CC} = 300 V R_C = 12 Ω I_{B1} = 0.75 A T_j = 100 °C		2.5	4.5	V
t_s t_f t_c	Storage Time Fall Time Cross-over Time	I_C = 25A V_{CC} = 50 V V_{BB} = -5 V R_{BB} = 0.6 Ω V_{clamp} = 450 V I_{B1} = 0.5 A L = 0.1 mH T_j = 100 °C		3.2 0.25 0.75	5 0.5 1.5	µs µs µs
V_{CEW}	Maximum Collector Emitter Voltage Without Snubber	I_{CWoff} = 42 A I_{B1} = 2 A V_{BB} = -5 V V_{CC} = 50 V L = 0.06 mH R_{BB} = 0.6 Ω T_j = 125 °C	450			V
V_F*	Diode Forward Voltage	I_F = 35 A T_j = 100 °C		1.5	1.85	V
I_{RM}	Reverse Recovery Current	V_{CC} = 200 V I_F = 35 A di_F/dt = -200 A/µs L < 0.05 µH T_j = 100 °C		20	24	A

∗ Pulsed: Pulse duration = 300 µs, duty cycle 1.5 %
To evaluate the conduction losses of the diode use the following equations:
V_F = 1.5 + 0.001 I_F P = 1.5 $I_{F(AV)}$ + 0.001 $I^2_{F(RMS)}$
See test circuits in databook introduction

Obsolete Product(s) - Obsolete Product(s)

Safe Operating Areas

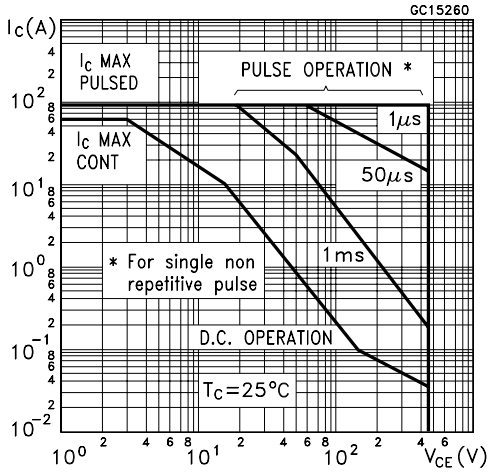

Thermal Impedance

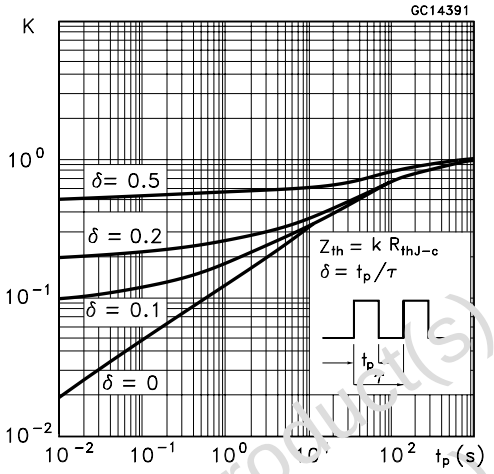

Derating Curve

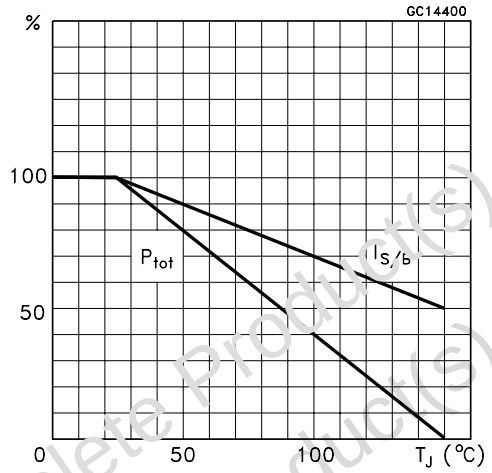

Collector-emitter Voltage Versus base-emitter Resistance

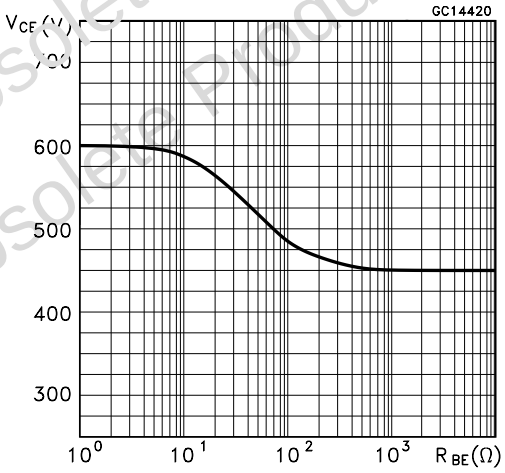

Collector Emitter Saturation Voltage

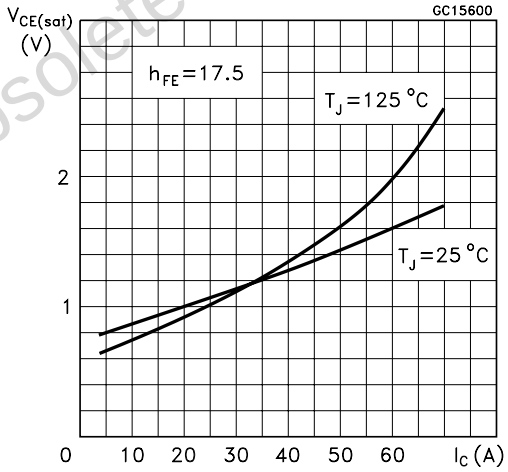

Base-Emitter Saturation Voltage

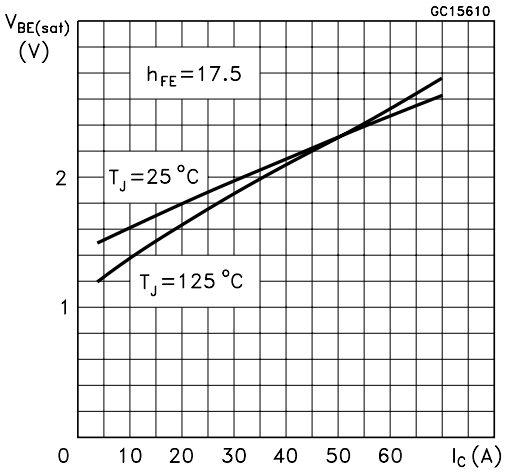

Obsolete Product(s) - Obsolete Product(s)

Reverse Biased SOA

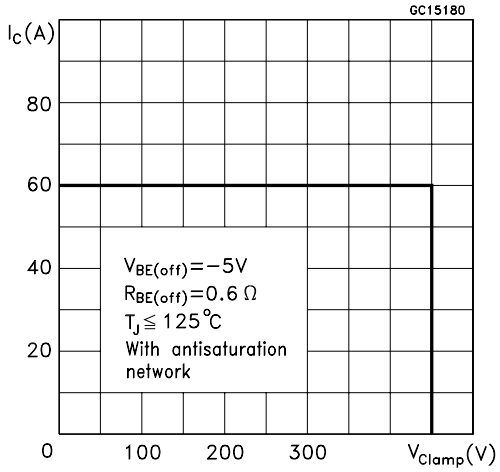

Foward Biased SOA

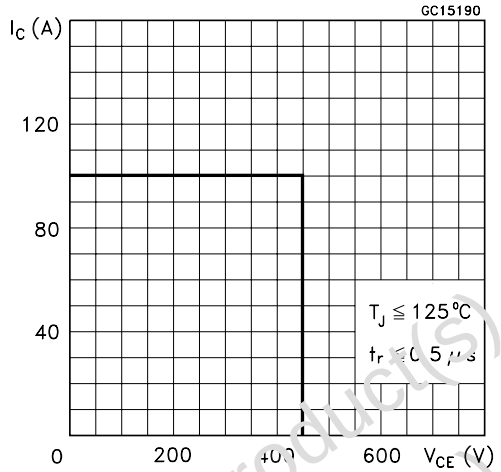

Reverse Biased AOA

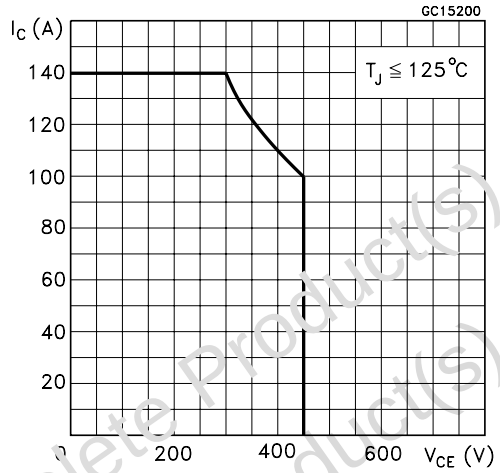

Forward Biased AOA

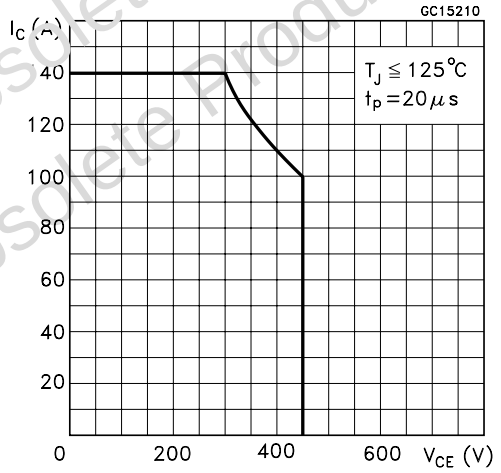

Switching Times Inductive Load

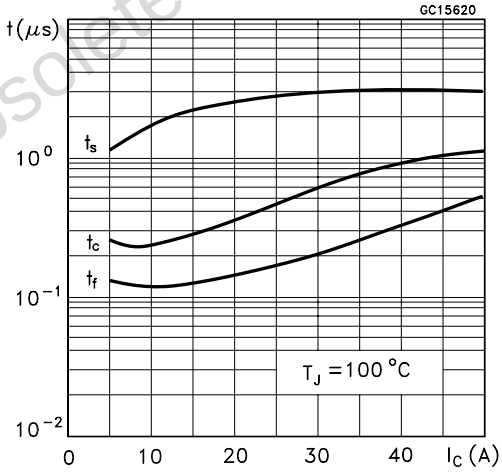

Switching Times Inductive Load Versus Temperature

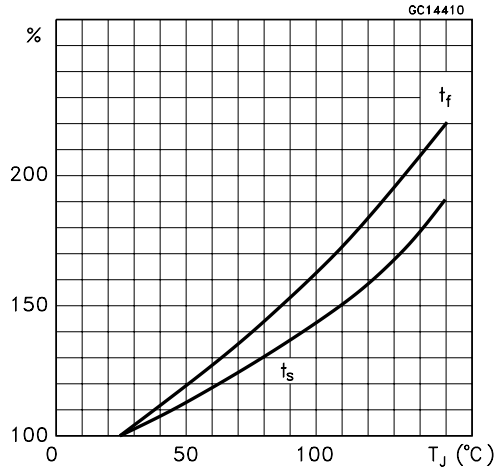

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

Dc Current Gain

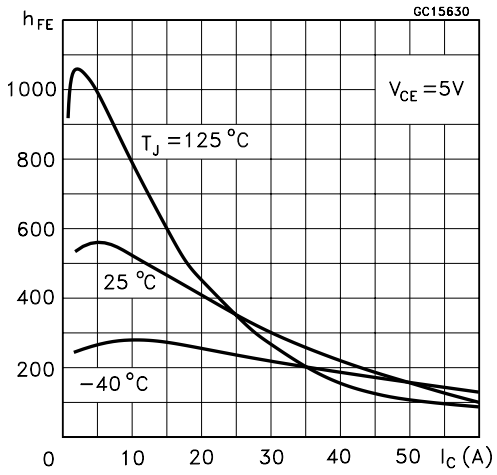

Typical V_F Versus I_F

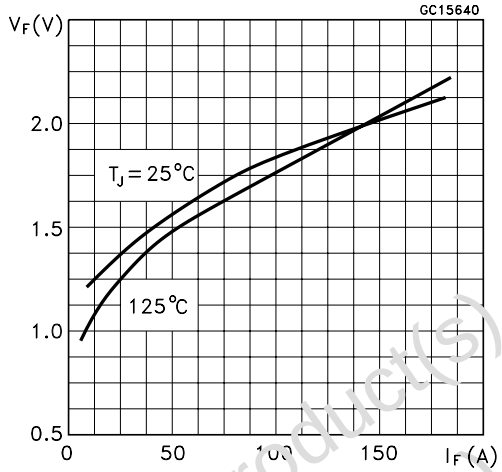

Peak Reverse Current Versus di_F/dt

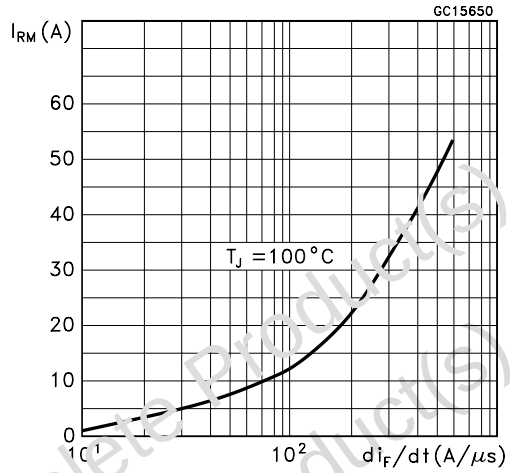

Turn-on Switching Test Circuit

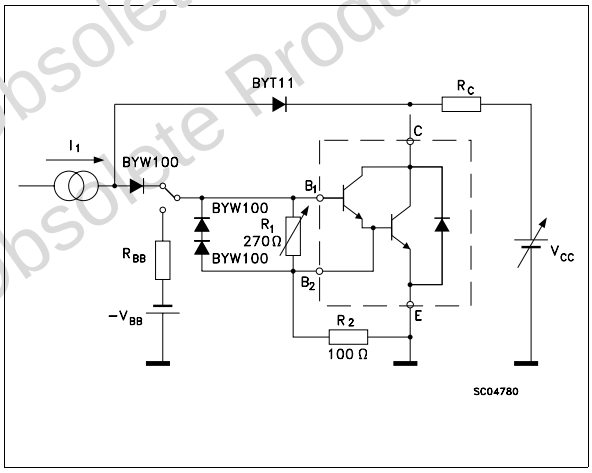

Turn-on Switching Waveforms

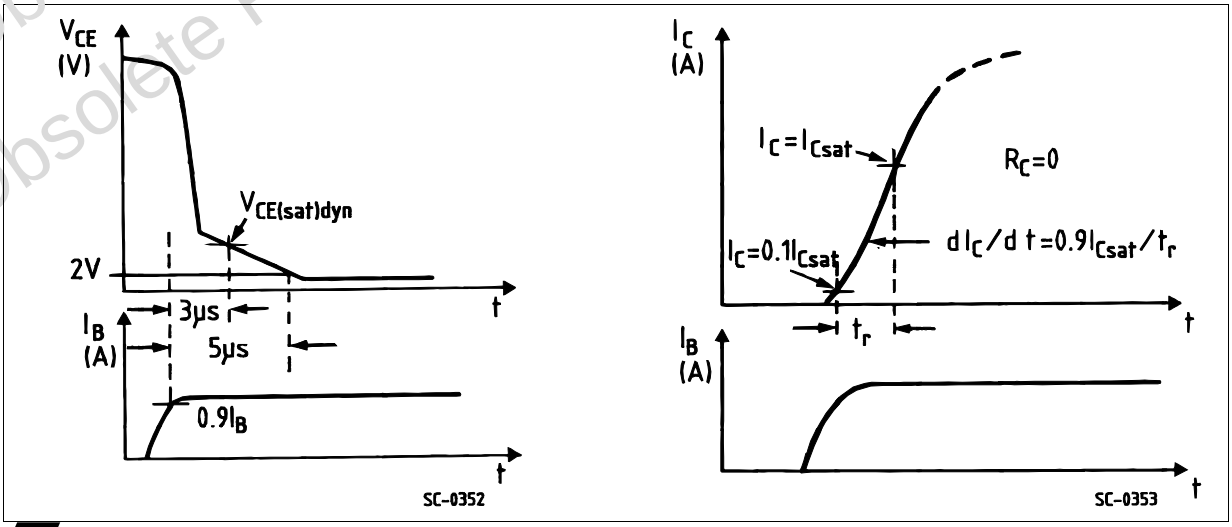

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

Turn-on Switching Test Circuit

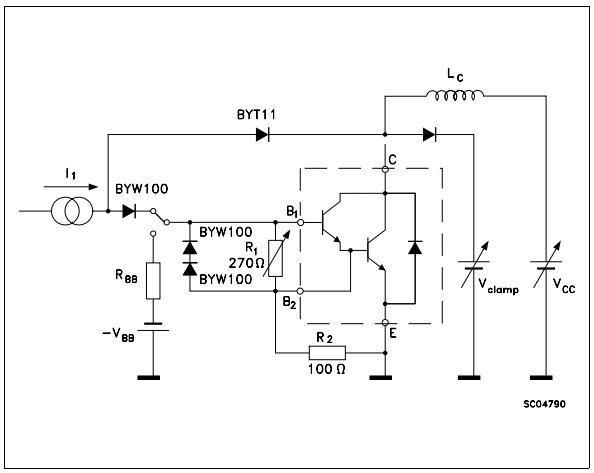

Turn-off Switching Waveforms

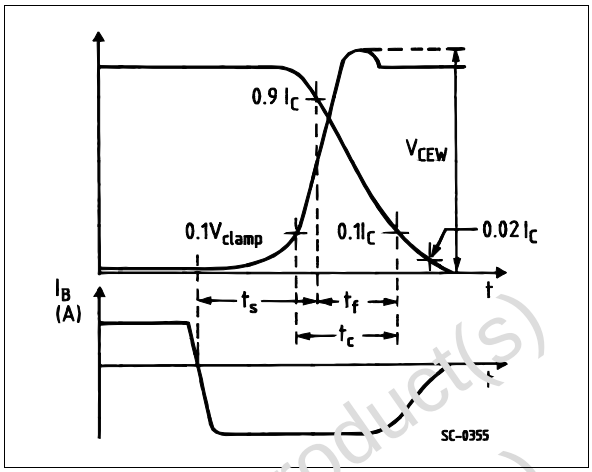

Turn-off Switching Test Circuit of Diode

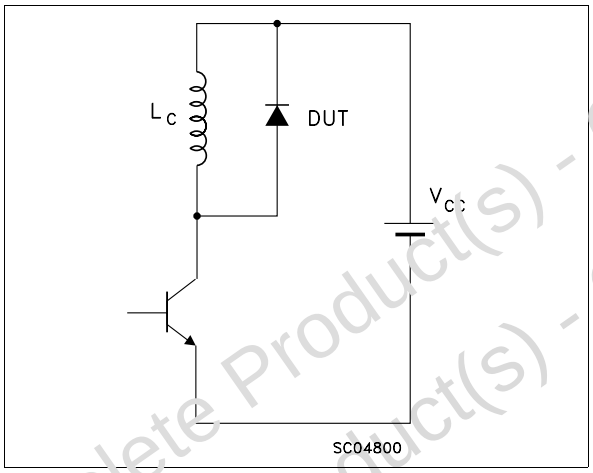

Turn-off Switching Waveform of Diode

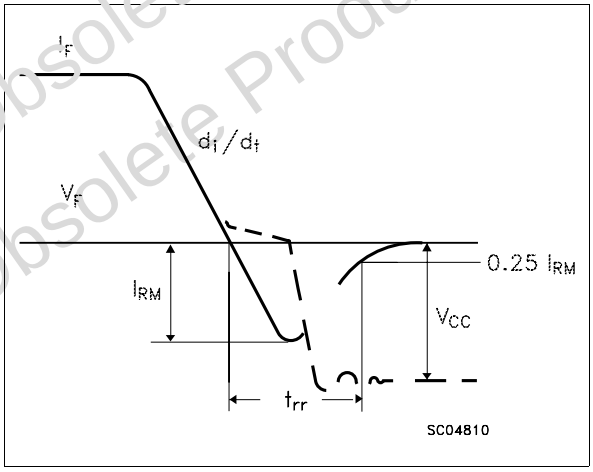

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

ISOTOP MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	11.8		12.2	0.465		0.480
A1	8.9		9.1	0.350		0.358
B	7.8		8.2	0.307		0.322
C	0.75		0.85	0.029		0.033
C2	1.95		2.05	0.076		0.080
D	37.8		38.2	1.488		1.503
D1	31.5		31.7	1.240		1.248
E	25.15		25.5	0.990		1.003
E1	23.85		24.15	0.938		0.950
E2		24.8			0.976	
G	14.9		15.1	0.586		0.594
G1	12.6		12.8	0.496		0.503
G2	3.5		4.3	0.137		1.169
F	4.1		4.3	0.161		0.169
F1	4.6		5	0.181		0.196
P	4		4.3	0.157		0.169
P1	4		4.4	0.157		0.173
S	30.1		30.3	1.185		1.193

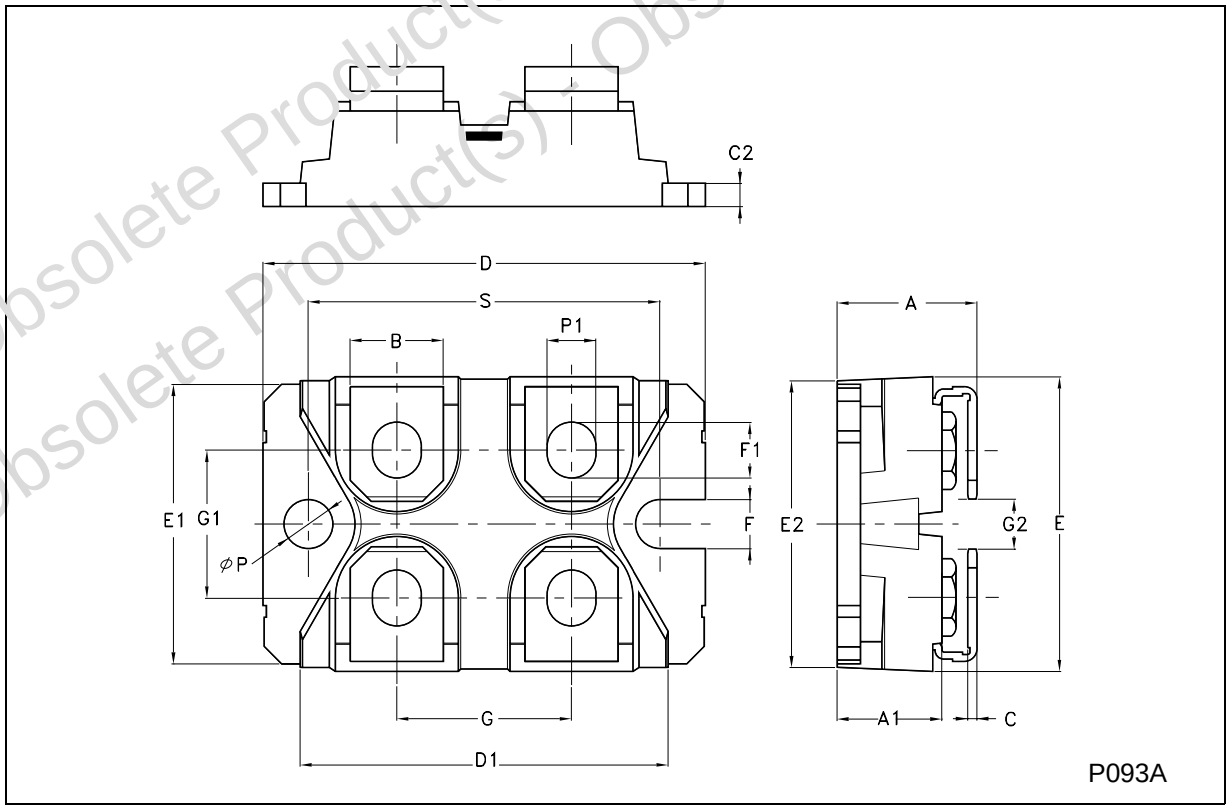

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics.

All other names are the property of their respective owners.

© 2003 STMicroelectronics – All Rights reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

http://www.st.com