STGB3NB60SD

N-CHANNEL 3A - 600V D^2PAK
Power MESH™ IGBT

TYPE	V_{CES}	$V_{CE(sat)}$	I_C
STGB3NB60SD	600 V	<1.5 V	3 A

- HIGH INPUT IMPEDANCE (VOLTAGE DRIVEN)
- VERY LOW ON-VOLTAGE DROP (V_{cesat})
- HIGH CURRENT CAPABILITY
- OFF LOSSES INCLUDE TAIL CURRENT
- INTEGRATED FREEWHEELING DIODE
- SURFACE-MOUNTING D^2PAK (TO-263) POWER PACKAGE IN TAPE & REEL (SUFFIX "T4")



D^2PAK
TO-263
(suffix"T4")

DESCRIPTION

Using the latest high voltage technology based on a patented strip layout, STMicroelectronics has designed an advanced family of IGBTs, the PowerMESH™ IGBTs, with outstanding perfomances. The suffix "S" identifies a family optimized to achieve minimum on-voltage drop for low frequency applications (<1kHz).

INTERNAL SCHEMATIC DIAGRAM



APPLICATIONS

- GAS DISCHARGE LAMP
- STATIC RELAYS
- MOTOR CONTROL

Obsolete Product(s) - Obsolete Product(s)

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CES}	Collector-Emitter Voltage (V_{GS} = 0)	600	V
V_{GE}	Gate-Emitter Voltage	± 20	V
I_C	Collector Current (continuos) at T_c=25°C	6	A
I_C	Collector Current (continuos)at T_c=100°C	3	A
I_{CM}(•)	Collector Current (pulsed)	25	A
P_{tot}	Total Dissipation at T_c = 25°C	70	W
	Derating Factor	0.46	W/°C
T_{stg}	Storage Temperature	–60 to 175	°C
T_j	Max. Operating Junction Temperature	175	°C

(•)Pulse width limited by safe operating area.

THERMAL DATA

$R_{thj\text{-}case}$	Thermal Resistance Junction-case	Max	2.14	°C/W
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient	Max	62.5	°C/W
$R_{thc\text{-}sink}$	Thermal Resistance Case-sink	Typ	0.5	°C/W

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{BR(CES)}$	Collector-Emitter Breakdown Voltage	I_D = 250 µA V_{GE} = 0	600			V
I_{CES}	Collector cut-off (V_{GE} = 0)	V_{CE} = Max Rating T_j = 25 °C V_{CE} = Max Rating T_j = 125 °C			10 100	µA µA
I_{GSS}	Gate-body Leakage Current (V_{DS} = 0)	V_{GS} = ± 20V V_{CE} = 0			±100	nA

ON (*)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{GE(th)}$	Gate Threshold Voltage	V_{CE} = V_{GE} I_C = 250 µA	2.5		5	V
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	V_{GE} = 15 V I_C = 1.5 A V_{GE} = 15 V I_C = 3 A V_{GE} = 15 V I_D = 3 A T_j = 125 °C		1 1.2 1.1	1.5	V V V

DYNAMIC

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
g_{fs}	Forward Transconductance	V_{CE} = 25 V I_C = 3 A	1.7	2.5		S
C_{ies}	Input Capacitance	V_{CE} = 25V f = 1 MHz V_{GE} = 0		255	330	pF
C_{oes}	Output Capacitance			30	40	pF
C_{res}	Reverse Transfer Capacitances			5.6	7	pF
Q_G	Total Gate Charge	V_{CE}=480V I_C=3 A V_{GE}=15 V		18		nC
Q_{GE}	Gate-Emitter Charge			5.4		nC
Q_{GC}	Gate-Collector Charge			5.5		nC
I_{CL}	Latching Current	V_{clamp} = 480 V R_G = 1 KΩ T_j=150 °C	12			A

SWITCHING ON

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$ t_r	DelayTime Rise Time	V_{CC} = 480 V I_C = 3 A V_{GE} = 15 V R_G = 1 kΩ		125 150		ns ns
$(di/dt)_{on}$ E_{on}	Turn-on Current Slope Turn-on Switching Losses	V_{CC} = 480 V I_C = 3 A V_{GE} = 15 V R_G = 1 kΩ T_j=125 °C		50 1100		A/µs µJ

Obsolete Product(s) - Obsolete Product(s)

ELECTRICAL CHARACTERISTICS (continued)

SWITCHING OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
t_c	Cross-Over Time	V_{CC} = 480 V I_C = 3 A		1.8		µs
$t_{r(Voff)}$	Off Voltage Rise Time	R_{GE} = 1 kΩ V_{GE} = 15 V		1.0		µs
$t_{d(Voff)}$	Delay Time			3.4		µs
t_f	Fall Time			0.72		µs
E_{off}(**)	Turn-off Switching Loss			1.15		mJ
t_c	Cross-Over Time	V_{CC} = 480 V I_C = 3 A		2.8		µs
$t_{r(Voff)}$	Off Voltage Rise Time	R_{GE} = 1 kΩ V_{GE} = 15 V		1.45		µs
$t_{d(Voff)}$	Delay Time	T_j = 125 °C		3.6		µs
t_f	Fall Time			1.2		µs
E_{off}(**)	Turn-off Switching Loss			1.8		mJ

COLLECTOR-EMITTER DIODE

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_f	Forward Current				3	A
I_{fm}	Forward Current pulsed				25	A
V_f	Forward On-Voltage	I_f = 3 A		1.55	1.9	V
		I_f = 1 A		1.15		V
t_{rr}	Reverse Recovery Time	I_f = 3 A V_R = 200 V		1700		ns
Q_{rr}	Reverse Recovery Charge	di/dt = 100 A/µs T_j = 125 °C		4500		nC
I_{rrm}	Reverse Recovery Current			9.5		A

(•)Pulse width limited by max. junction temperature
(*)Pulsed: Pulse duration = 300 µs, duty cycle 1.5 %.
(**)Losses Include Also The Tail (Jedec Standardization)

Obsolete Product(s) - Obsolete Product(s)

Thermal Impedance

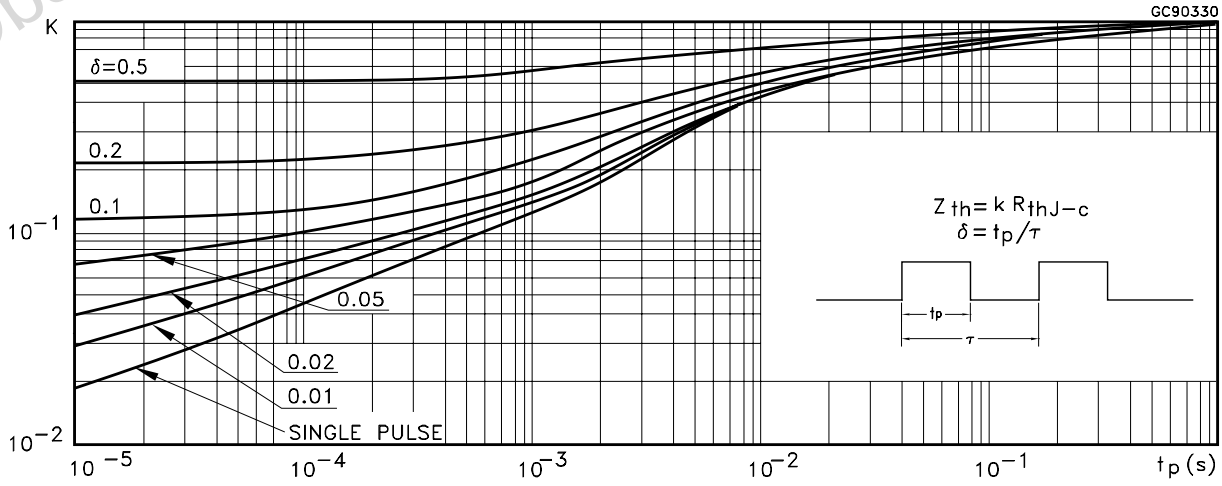

Output Characteristics

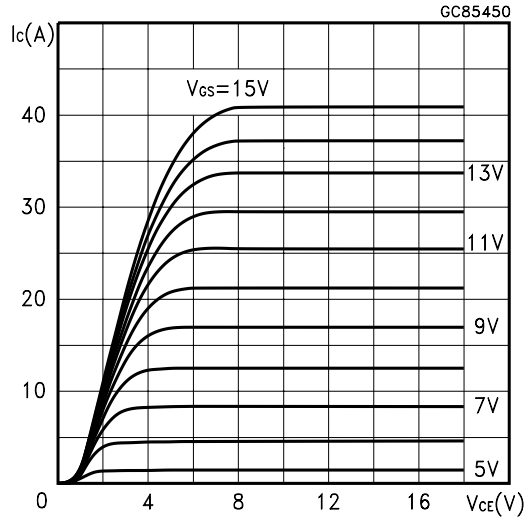

Transfer Characteristics

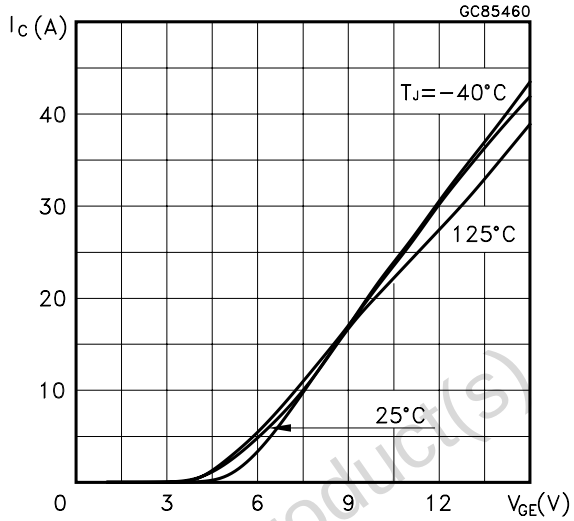

Transconductance

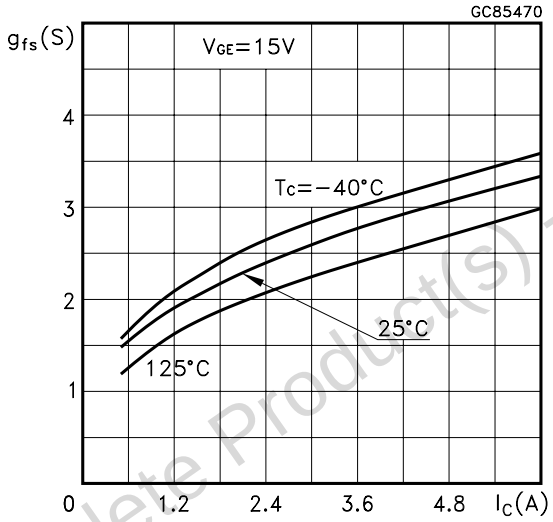

Collector-Emitter on Voltage vs Temperature

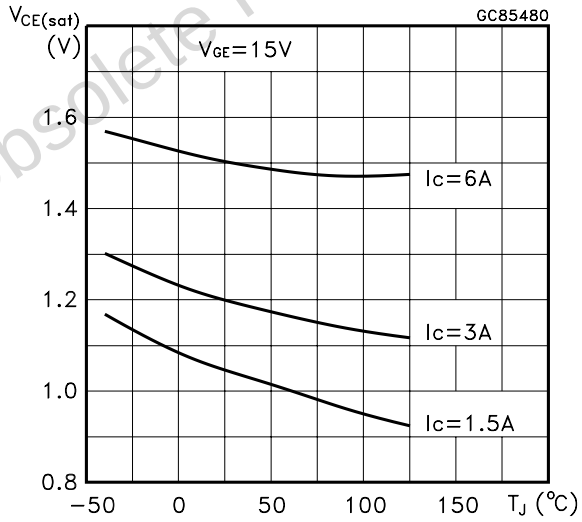

Collector-Emiter on Voltage vs Collector Current

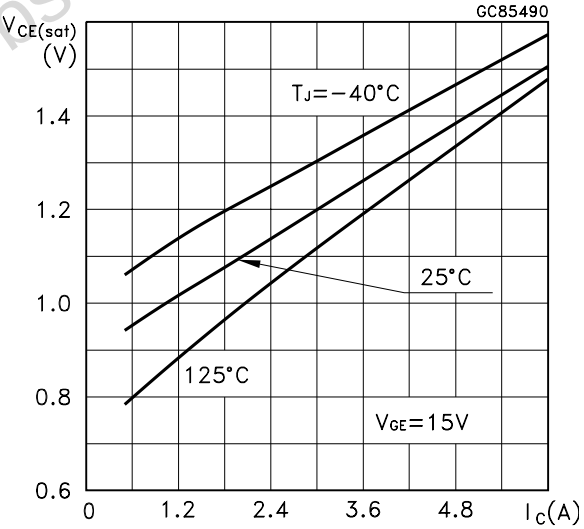

Gate Threshold vs Temperature

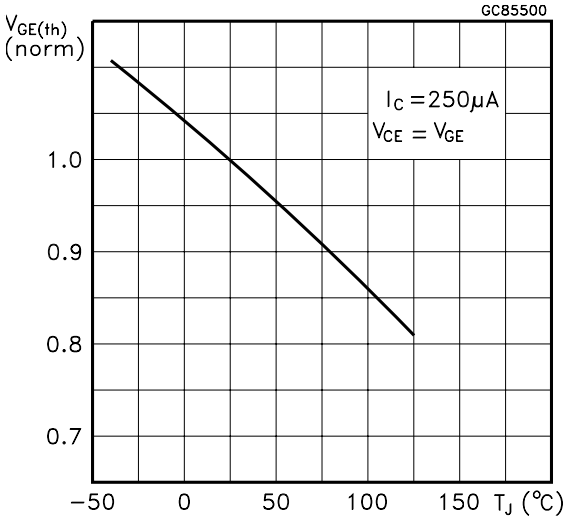

Obsolete Product(s) - Obsolete Product(s)

Normalized Breakdown Voltage vs Temperature

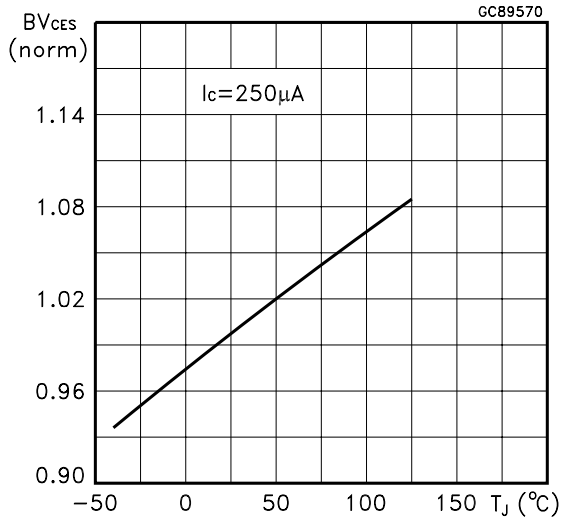

Capacitance Variations

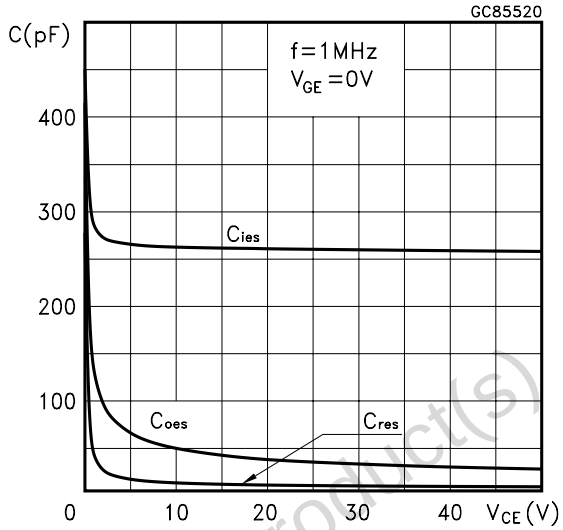

Gate charge Gate-Emitter Voltage

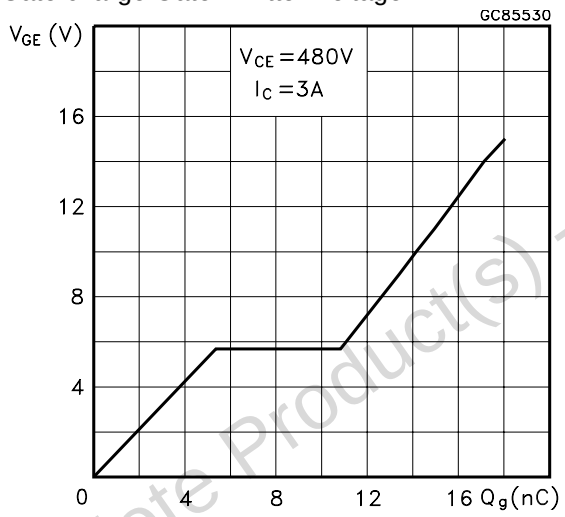

Off Switching Losses vs Ic

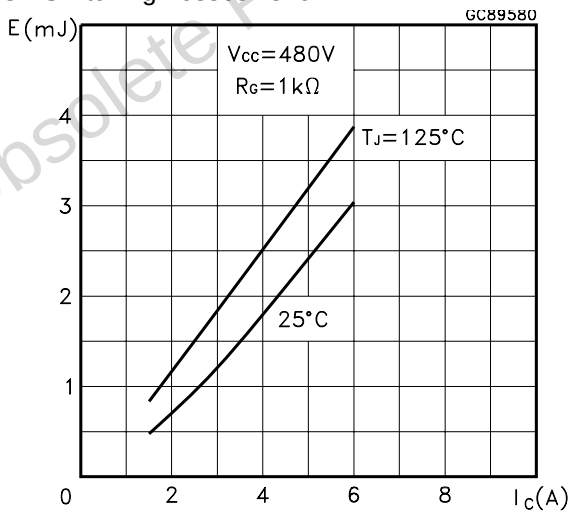

Off Switching Losses vs Tj

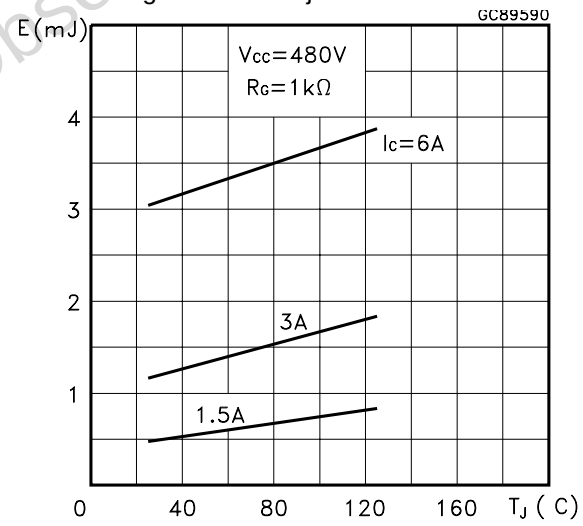

Switching Off Safe Operating Area

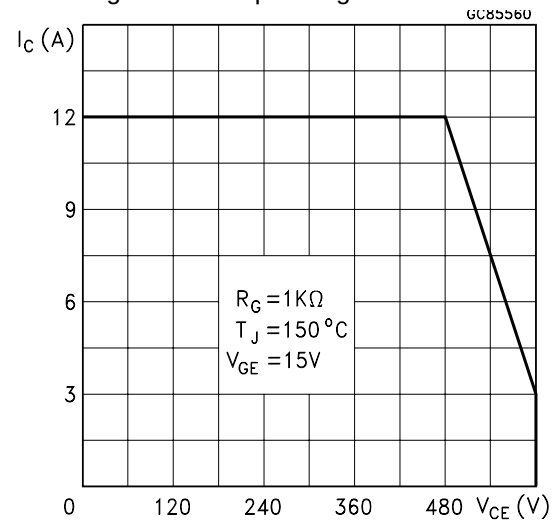

Obsolete Product(s) - Obsolete Product(s)

Diode Forward vs Tj

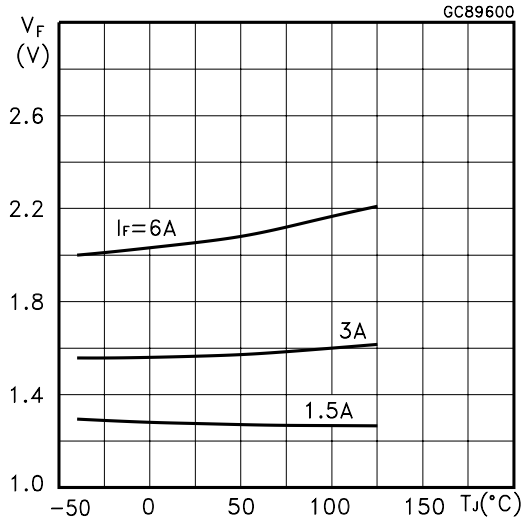

Diode Forward Voltage

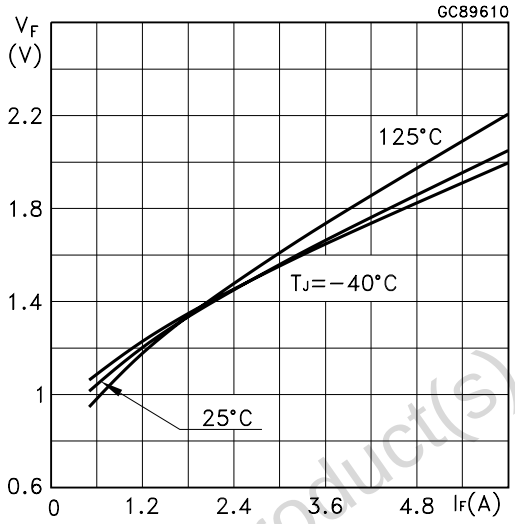

Fig. 1: Gate Charge test Circuit

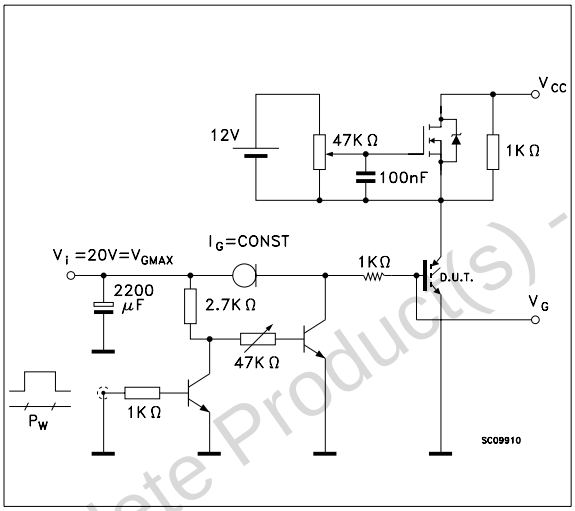

Fig. 2 Test Circuit For Inductive Load Switching

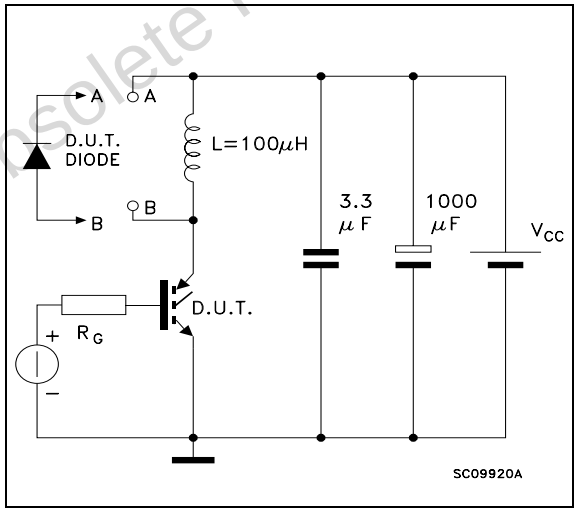

Fig. 3: Switching Waveforms

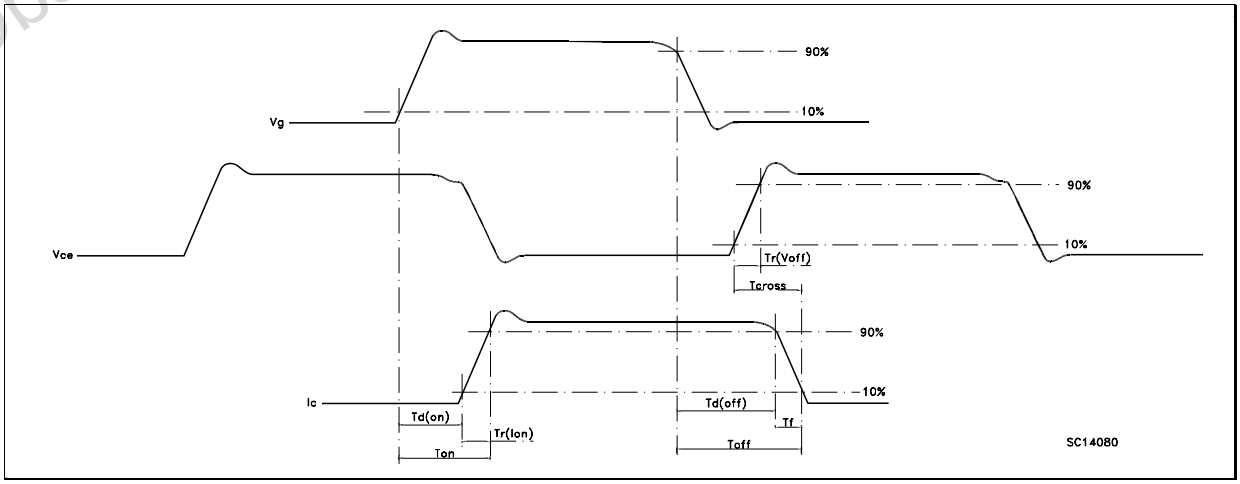

Obsolete Product(s) - Obsolete Product(s)

D²PAK MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.7		0.93	0.027		0.036
B2	1.14		1.7	0.044		0.067
C	0.45		0.6	0.017		0.023
C2	1.23		1.36	0.048		0.053
D	8.95		9.35	0.352		0.368
D1		8			0.315	
E	10		10.4	0.393		
E1		8.5			0.334	
G	4.88		5.28	0.192		0.208
L	15		15.85	0.590		0.625
L2	1.27		1.4	0.050		0.055
L3	1.4		1.75	0.055		0.068
M	2.4		3.2	0.094		0.126
R		0.4			0.015	
V2	0º		8º			

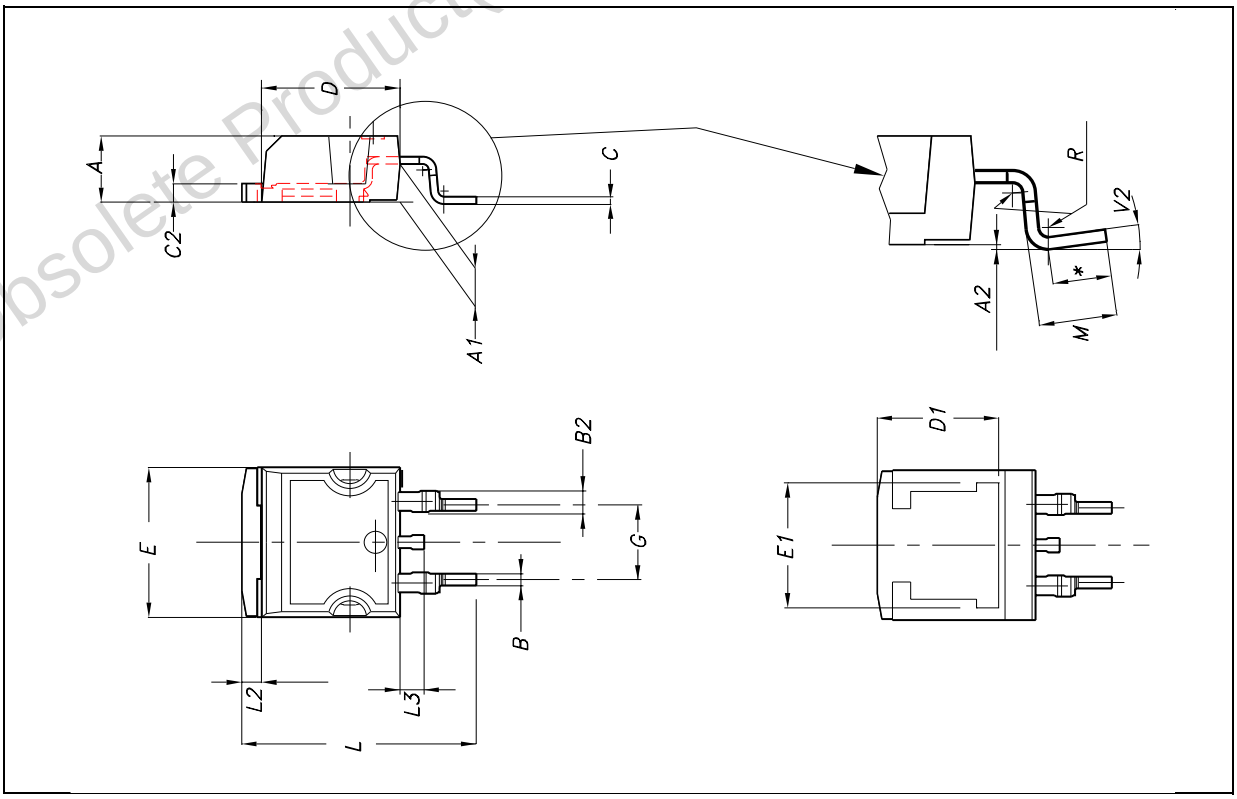

Obsolete Product(s) - Obsolete Product(s)

Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is registered trademark of STMicroelectronics
© 2000 STMicroelectronics - All Rights Reserved

All other names are the property of their respective owners.

STMicroelectronics GROUP OF COMPANIES
Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

http://www.st.com