





STB11NM80T4, STF11NM80, STI11NM80 STP11NM80, STW11NM80

Datasheet

N-channel 800 V, 380 mΩ typ., 11 A MDmesh Power MOSFETs
in D²PAK, TO-220FP, I²PAK, TO-220 and TO-247 packages

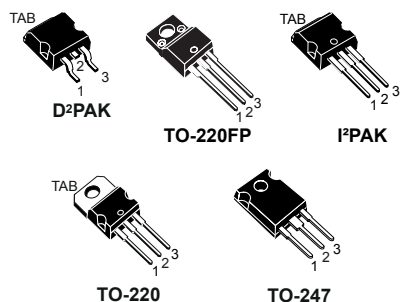

AM01475v1_noZen



Features

Order code	V _{DS}	R _{DS(on)} max.	I _D
STB11NM80T4	800 V	400 mΩ	11 A
STF11NM80			
STI11NM80			
STP11NM80			
STW11NM80			

- High dv/dt and avalanche capabilities
- Low input capacitance and gate charge
- Low gate input resistance
- 100% avalanche tested

Applications

- Switching applications

Description

These N-channel Power MOSFETs are developed using STMicroelectronics' revolutionary MDmesh technology, which associates the multiple drain process with the company's PowerMESH horizontal layout. These devices offer extremely low on-resistance, high dv/dt and excellent avalanche characteristics. Utilizing ST's proprietary strip technique, these Power MOSFETs boast an overall dynamic performance which is superior to similar products on the market.

Product status links

[STB11NM80T4](#)

[STF11NM80](#)

[STI11NM80](#)

[STP11NM80](#)

[STW11NM80](#)

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value		Unit
		D ² PAK, I ² PAK, TO-220 TO-247	TO-220FP	
V _{DS}	Drain-source voltage	800		V
V _{GS}	Gate-source voltage	±30		V
I _D	Drain current (continuous) at T _C = 25 °C	11	11 ⁽¹⁾	A
	Drain current (continuous) at T _C = 100 °C	8	8 ⁽¹⁾	
I _{DM} ⁽²⁾	Drain current (pulsed)	44	44 ⁽¹⁾	A
P _{TOT}	Total power dissipation at T _C = 25 °C	150	35	W
dv/dt ⁽³⁾	Peak diode recovery voltage slope	30		V/ns
V _{ISO}	Insulation withstand voltage (RMS) from all three leads to external heat sink (t = 1 s, T _C = 25 °C)		2.5	kV
T _{stg}	Storage temperature range	-65 to 150		°C
T _J	Operation junction temperature range			°C

1. Limited by maximum junction temperature.
2. Pulse width is limited by safe operating area.
3. V_{DD} = 640 V, I_{SD} = 11 A.

Table 2. Thermal data

Symbol	Parameter	Value					Unit
		D ² PAK	TO-220FP	I ² PAK	TO-220	TO-247	
R _{thJC}	Thermal resistance, junction-to-case	0.83	3.6	0.83			°C/W
R _{thJA}	Thermal resistance, junction-to-ambient	30 ⁽¹⁾	62.5			50	°C/W

1. When mounted on a standard 1 inch² area of FR-4 PCB with 2-oz copper.

Table 3. Avalanche characteristics

Symbol	Parameter	Value	Unit
I _{AR}	Avalanche current, repetitive or non-repetitive (pulse width limited by T _J max.)	2.5	A
E _{AS}	Single pulse avalanche energy (starting T _J = 25 °C, I _D = I _{AR} , V _{DD} = 50 V)	400	mJ

2 Electrical characteristics

$T_C = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

Table 4. On/off states

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	$I_D = 250\text{ }\mu\text{A}$, $V_{GS} = 0\text{ V}$	800			V
I_{DSS}	Zero gate voltage drain current	$V_{GS} = 0\text{ V}$, $V_{DS} = 800\text{ V}$			10	μA
		$V_{GS} = 0\text{ V}$, $V_{DS} = 800\text{ V}$, $T_C = 125\text{ }^{\circ}\text{C}^{(1)}$			100	
I_{GSS}	Gate body leakage current	$V_{DS} = 0\text{ V}$, $V_{GS} = \pm 30\text{ V}$			± 100	nA
$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}$, $I_D = 250\text{ }\mu\text{A}$	3	4	5	V
$R_{DS(on)}$	Static drain-source on-resistance	$V_{GS} = 10\text{ V}$, $I_D = 5.5\text{ A}$		380	400	m Ω

1. Specified by design, not tested in production.

Table 5. Dynamic

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	$V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$, $V_{GS} = 0\text{ V}$	-	1630	-	pF
C_{oss}	Output capacitance		-	750	-	pF
C_{rss}	Reverse transfer capacitance		-	30	-	pF
Q_g	Total gate charge	$V_{DD} = 640\text{ V}$, $I_D = 11\text{ A}$, $V_{GS} = 0\text{ to }10\text{ V}$ (see the Figure 16. Test circuit for gate charge behavior)	-	50	-	nC
Q_{gs}	Gate-source charge		-	12	-	nC
Q_{gd}	Gate-drain charge		-	21	-	nC
R_g	Gate input resistance	$f = 1\text{ MHz}$, open drain	-	2.7	-	Ω

Table 6. Switching times

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	$V_{DD} = 400\text{ V}$, $I_D = 5.5\text{ A}$, $R_G = 4.7\text{ }\Omega$, $V_{GS} = 10\text{ V}$	-	22	-	ns
t_r	Rise time		-	17	-	ns
$t_{d(off)}$	Turn-off delay time	(see the Figure 15. Test circuit for resistive load switching times and Figure 20. Switching time waveform)	-	46	-	ns
t_f	Fall time		-	15	-	ns

Table 7. Source-drain diode

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
I_{SD}	Source-drain current		-		11	A
$I_{SDM}^{(1)}$	Source-drain current (pulsed)		-		44	A
$V_{SD}^{(2)}$	Forward on voltage	$I_{SD} = 11\text{ A}$, $V_{GS} = 0\text{ V}$	-	0.86		V
t_{rr}	Reverse recovery time	$I_{SD} = 11\text{ A}$, $di/dt = 100\text{ A}/\mu\text{s}$, $V_{DD} = 50\text{ V}$	-	612		ns
Q_{rr}	Reverse recovery charge		-	7.22		μC
I_{RRM}	Reverse recovery current	(see the Figure 17. Test circuit for inductive load switching and diode recovery times)	-	23.6		A
t_{rr}	Reverse recovery time	$I_{SD} = 20\text{ A}$, $di/dt = 100\text{ A}/\mu\text{s}$, $V_{DD} = 50\text{ V}$, $T_J = 150\text{ }^\circ\text{C}$	-	970		ns
Q_{rr}	Reverse recovery charge		-	11.25		μC
I_{RRM}	Reverse recovery current	(see the Figure 17. Test circuit for inductive load switching and diode recovery times)	-	23.2		A

1. Pulse width limited by safe operating area.
2. Pulsed: pulse duration = 300 μs , duty cycle 1.5%.

2.1 Electrical characteristics (curves)

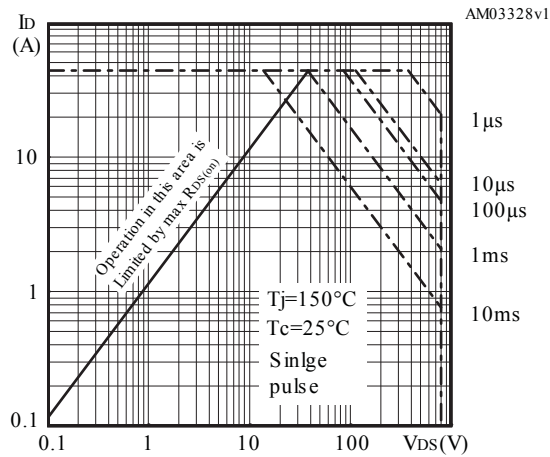
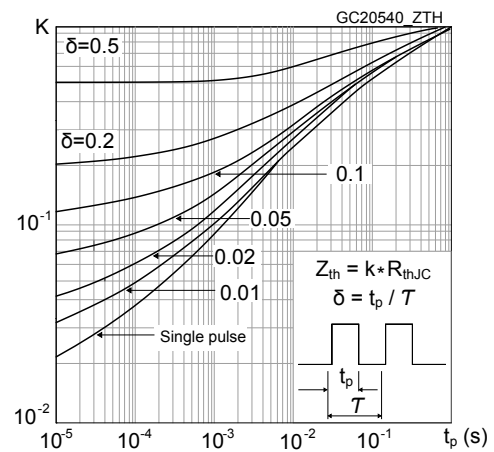
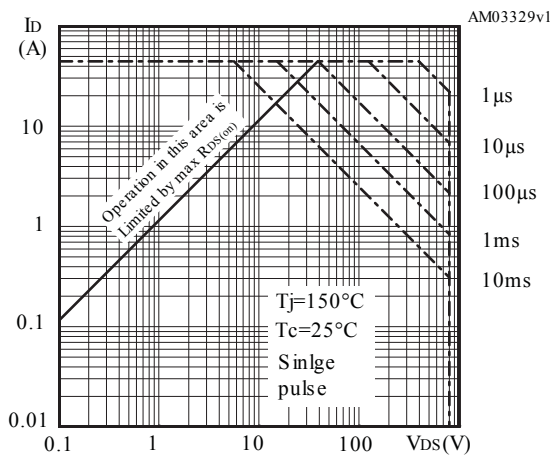
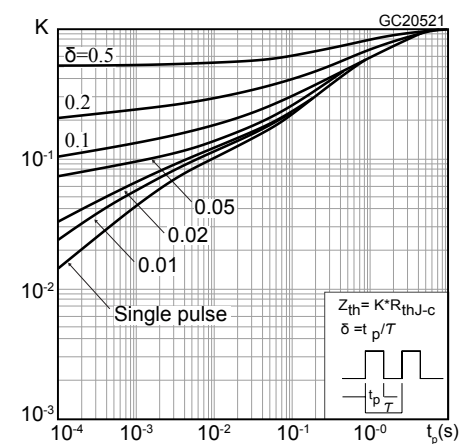
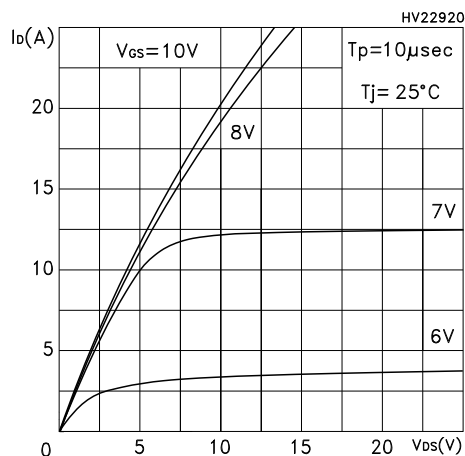
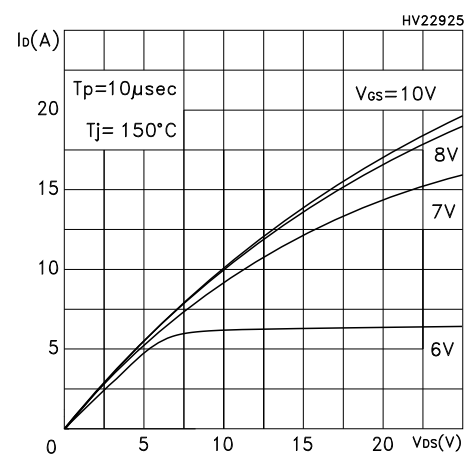
Figure 1. Safe operating area for D²PAK, I²PAK, TO-220 and TO-247

Figure 2. Normalized transient thermal impedance for D²PAK, I²PAK, TO-220 and TO-247

Figure 3. Safe operating area for TO-220FP

Figure 4. Normalized transient thermal impedance for TO-220FP

Figure 5. Typical output characteristics at Tj = 25 °C

Figure 6. Typical output characteristics at Tj = 150 °C


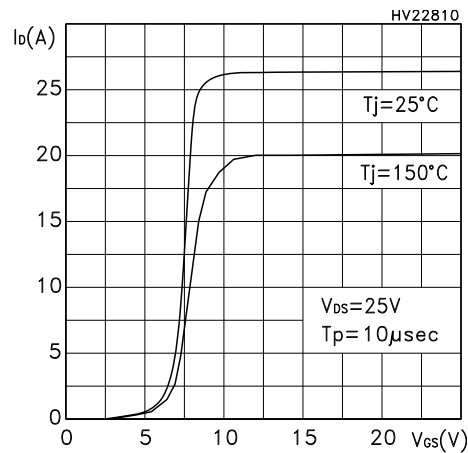
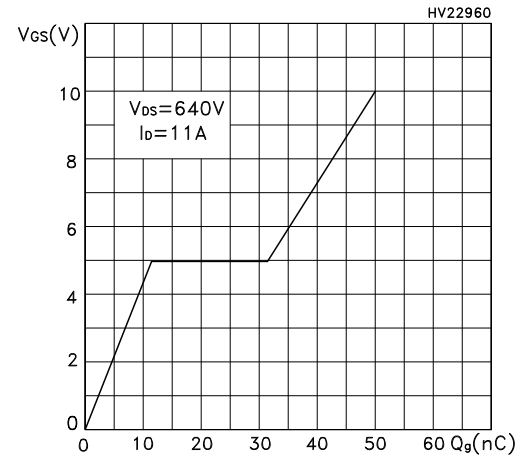
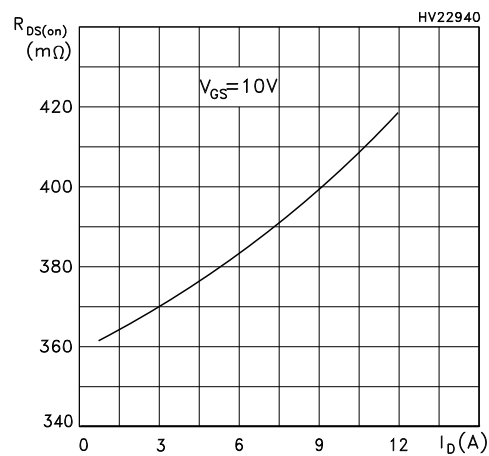
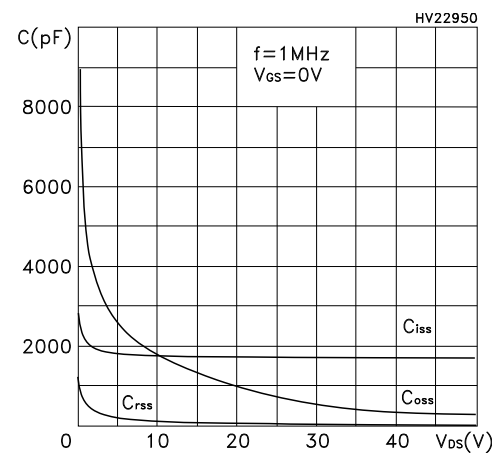
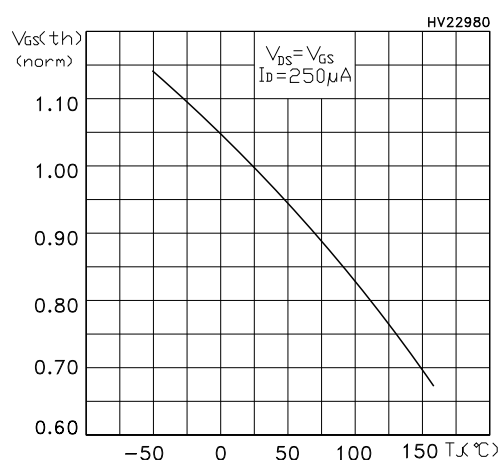
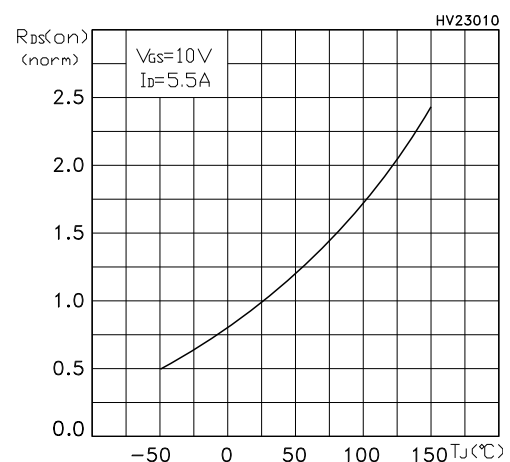
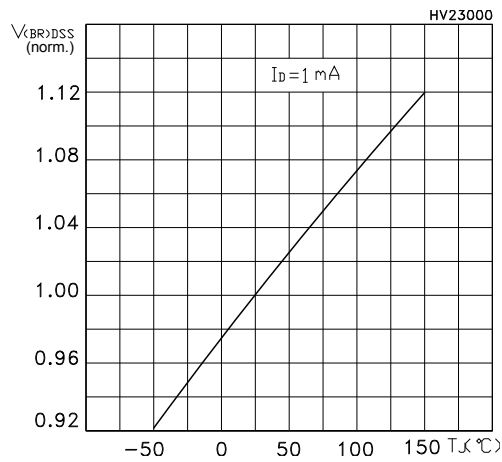
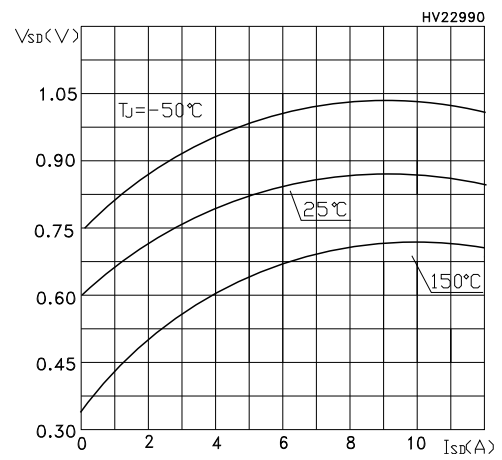
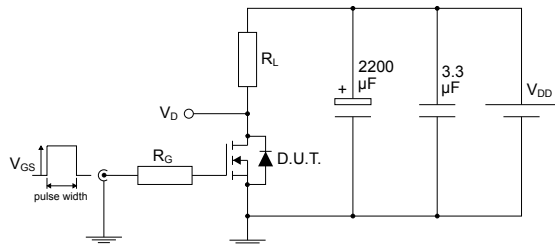
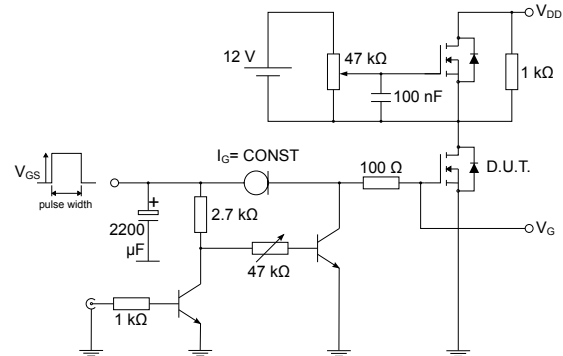
Figure 7. Typical transfer characteristics

Figure 8. Typical gate charge characteristics

Figure 9. Typical drain-source on-resistance

Figure 10. Typical capacitance characteristics

Figure 11. Normalized gate threshold vs temperature

Figure 12. Normalized on-resistance vs temperature


Figure 13. Normalized breakdown voltage vs temperature

Figure 14. Typical reverse diode forward characteristics


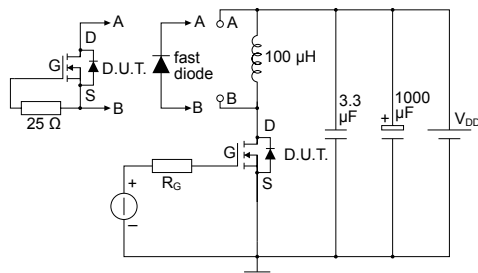
3 Test circuits

Figure 15. Test circuit for resistive load switching times


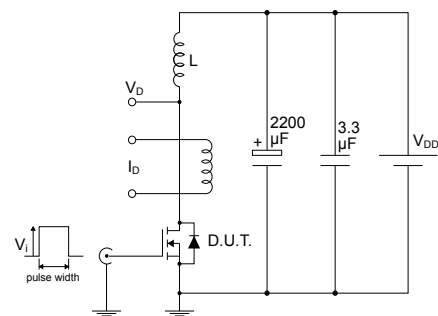
AM01468v1

Figure 16. Test circuit for gate charge behavior


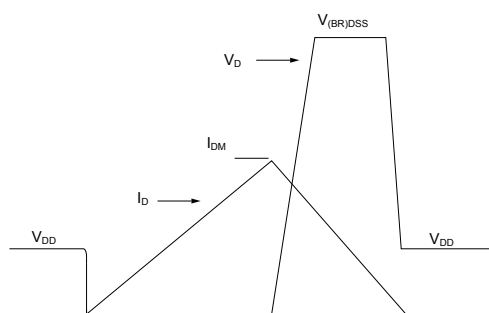
AM01469v1

Figure 17. Test circuit for inductive load switching and diode recovery times


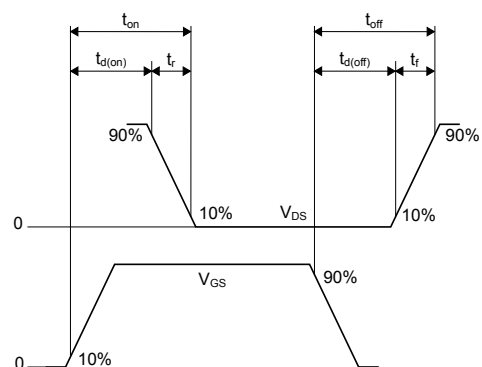
AM01470v1

Figure 18. Unclamped inductive load test circuit


AM01471v1

Figure 19. Unclamped inductive waveform


AM01472v1

Figure 20. Switching time waveform


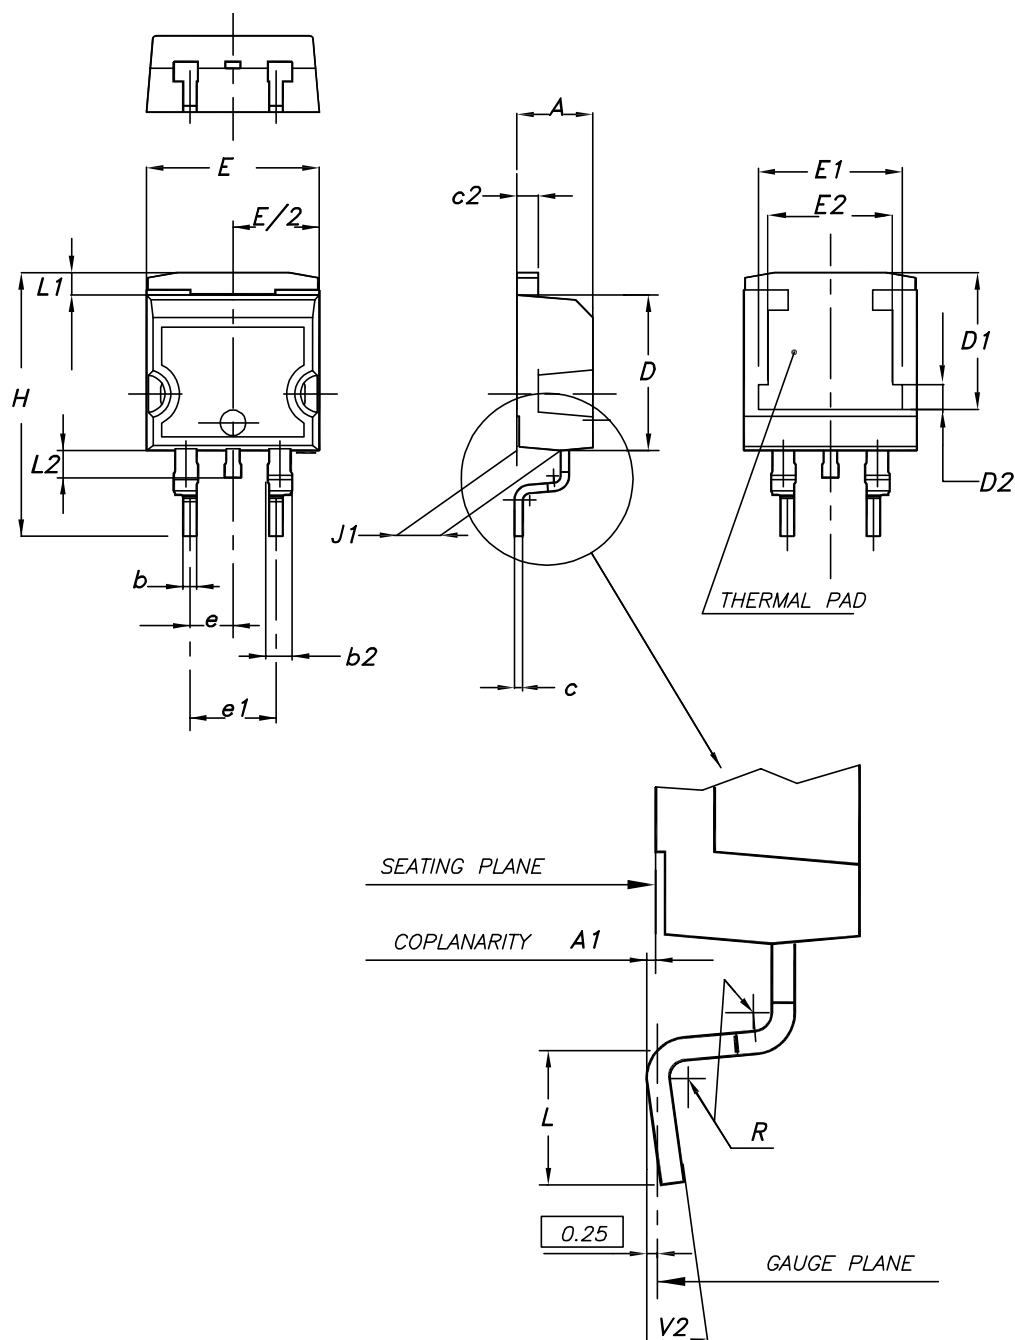
AM01473v1

4 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

4.1 D²PAK (TO-263) type A package information

Figure 21. D²PAK (TO-263) type A package outline




0079457_27

Table 8. D²PAK (TO-263) type A package mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
A1	0.03		0.23
b	0.70		0.93
b2	1.14		1.70
c	0.45		0.60
c2	1.23		1.36
D	8.95		9.35
D1	7.50	7.75	8.00
D2	1.10	1.30	1.50
E	10.00		10.40
E1	8.30	8.50	8.70
E2	6.85	7.05	7.25
e		2.54	
e1	4.88		5.28
H	15.00		15.85
J1	2.49		2.69
L	2.29		2.79
L1	1.27		1.40
L2	1.30		1.75
R		0.40	
V2	0°		8°


Figure 22. D²PAK (TO-263) recommended footprint (dimensions are in mm)

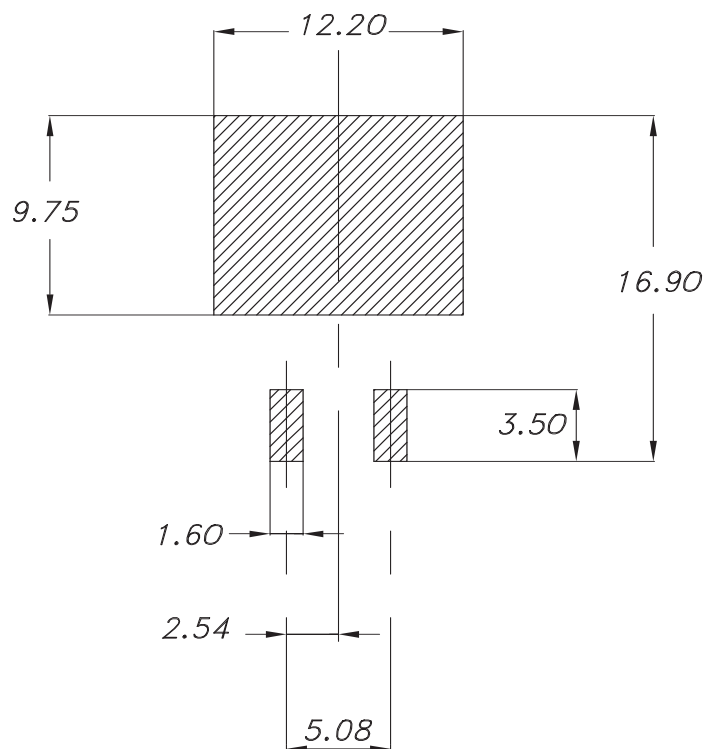

0079457_Rev27_footprint

4.2 TO-220FP type B package information

Figure 23. TO-220FP type B package outline

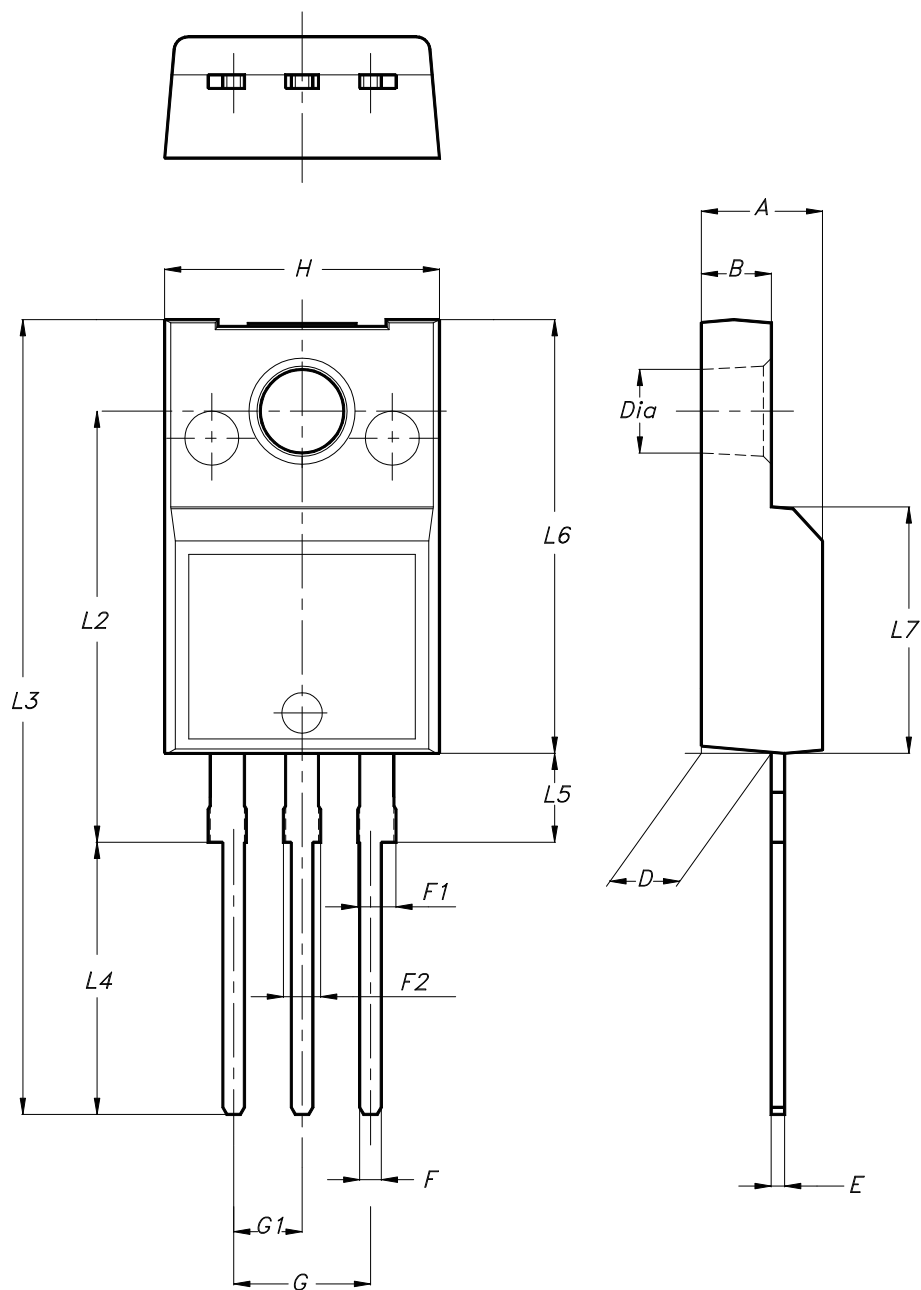


7012510_B_rev.14

Table 9. TO-220FP type B package mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
B	2.50		2.70
D	2.50		2.75
E	0.45		0.70
F	0.75		1.00
F1	1.15		1.70
F2	1.15		1.70
G	4.95		5.20
G1	2.40		2.70
H	10.00		10.40
L2		16.00	
L3	28.60		30.60
L4	9.80		10.60
L5	2.90		3.60
L6	15.90		16.40
L7	9.00		9.30
Dia	3.00		3.20

4.3 I²PAK package information

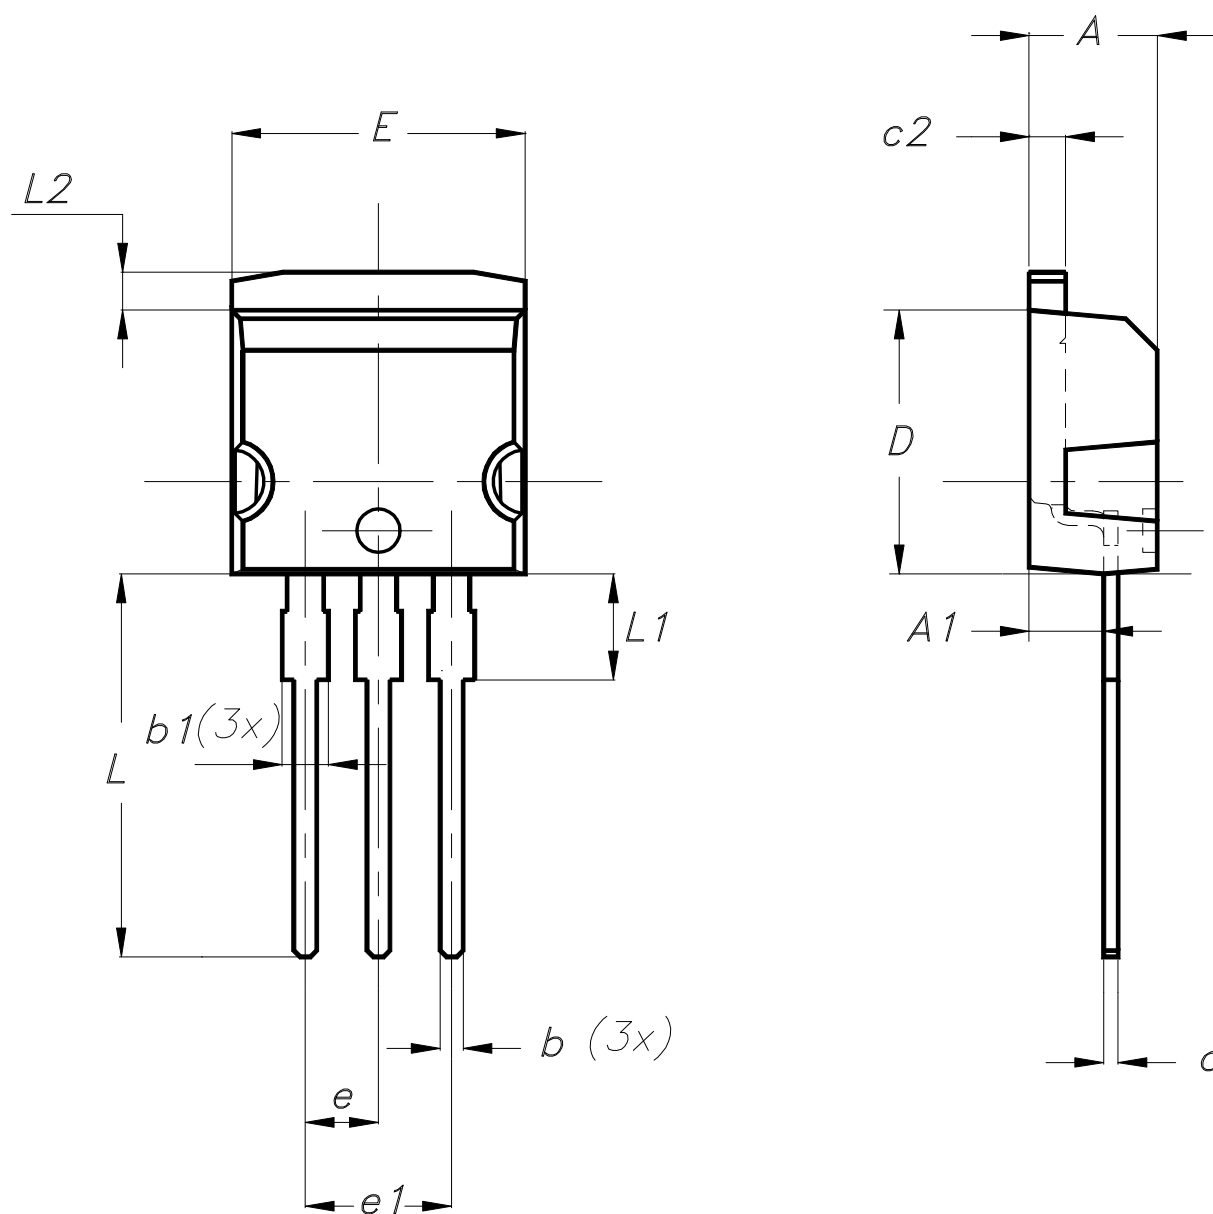 Figure 24. I²PAK package outline


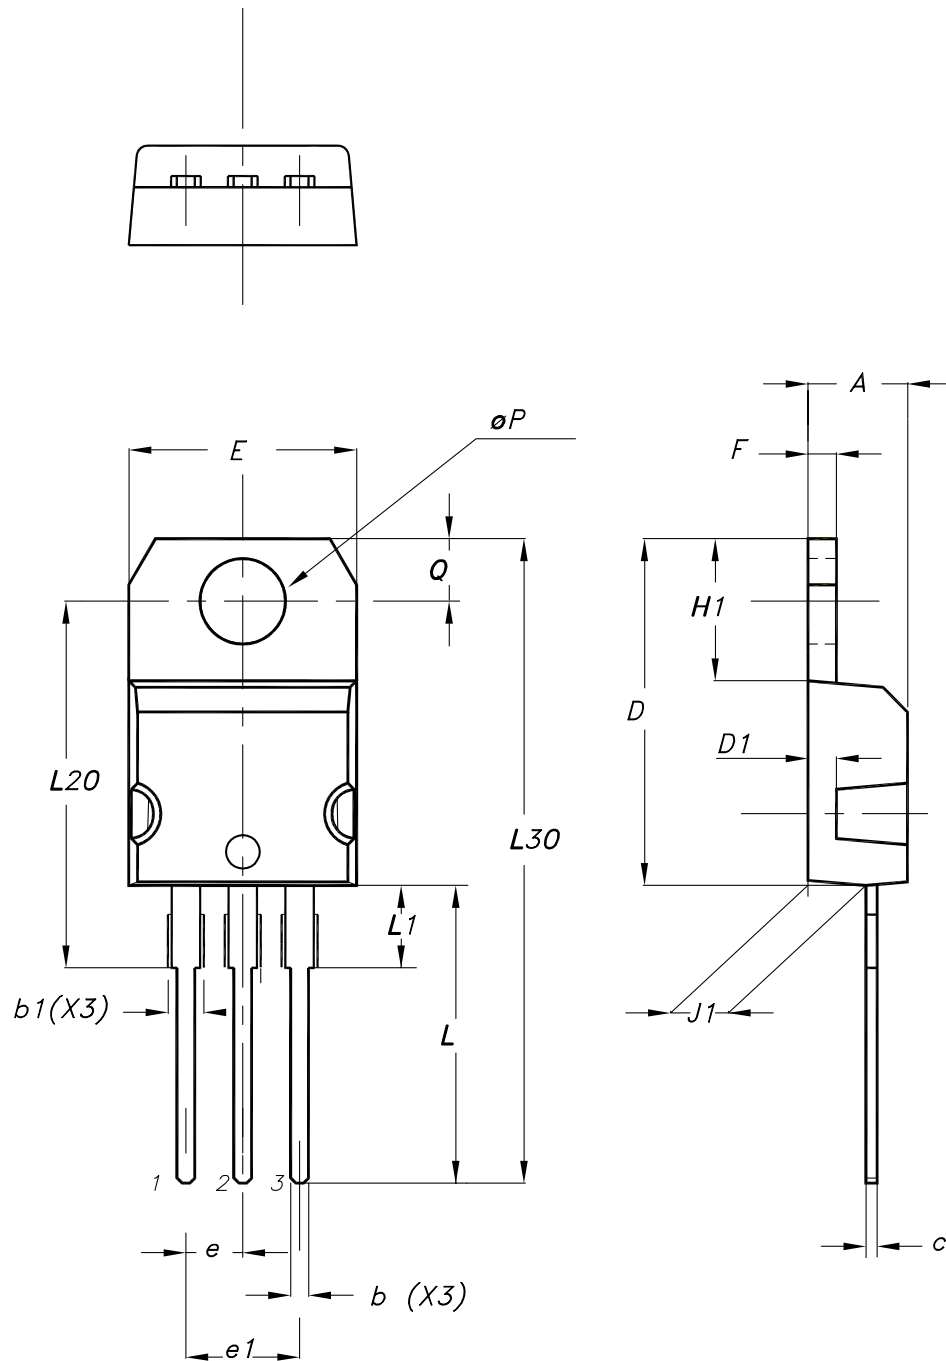
0004982_Rev_10

Table 10. I²PAK package mechanical data

Dim.	mm	
	Min.	Max.
A	4.40	4.60
A1	2.40	2.72
b	0.61	0.88
b1	1.14	1.70
c	0.49	0.70
c2	1.23	1.32
D	8.95	9.35
e	2.40	2.70
e1	4.95	5.15
E	10.00	10.40
L	13.00	14.00
L1	3.50	3.93
L2	1.27	1.40

4.4 TO-220 type A package information

Figure 25. TO-220 type A package outline




0015988_typeA_Rev_24

Table 11. TO-220 type A package mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
b	0.61		0.88
b1	1.14		1.55
c	0.48		0.70
D	15.25		15.75
D1		1.27	
E	10.00		10.40
e	2.40		2.70
e1	4.95		5.15
F	1.23		1.32
H1	6.20		6.60
J1	2.40		2.72
L	13.00		14.00
L1	3.50		3.93
L20		16.40	
L30		28.90	
øP	3.75		3.85
Q	2.65		2.95
Slug flatness		0.03	0.10

4.5 TO-247 package information

Figure 26. TO-247 package outline

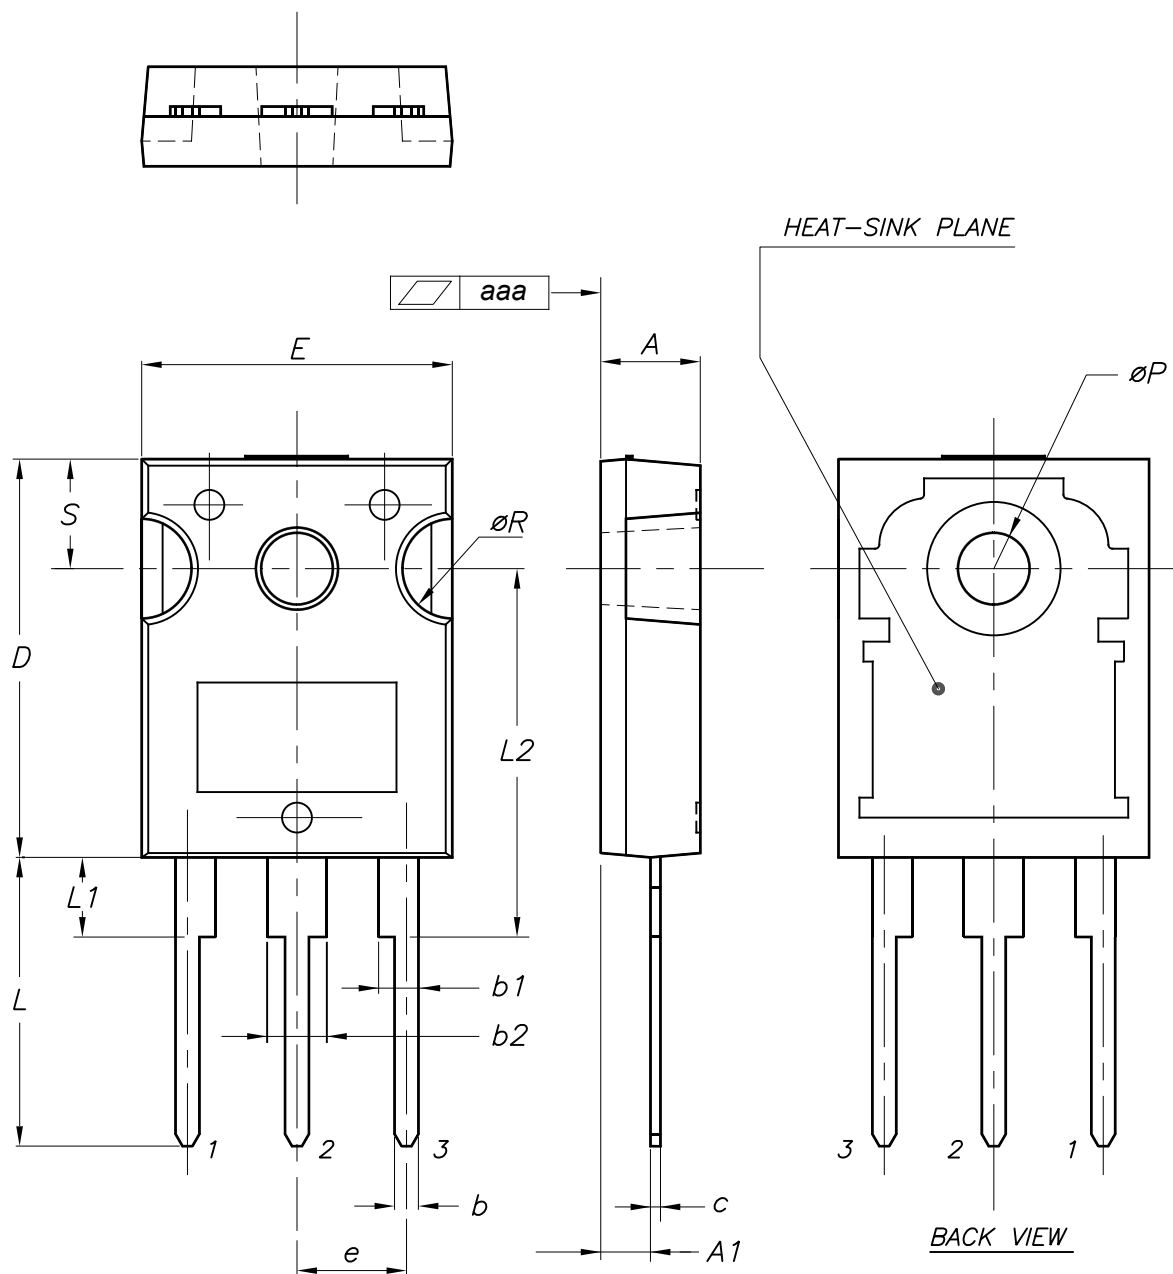


0075325_10

Table 12. TO-247 package mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.85		5.15
A1	2.20		2.60
b	1.0		1.40
b1	2.0		2.40
b2	3.0		3.40
c	0.40		0.80
D	19.85		20.15
E	15.45		15.75
e	5.30	5.45	5.60
L	14.20		14.80
L1	3.70		4.30
L2		18.50	
ØP	3.55		3.65
ØR	4.50		5.50
S	5.30	5.50	5.70
aaa		0.04	0.10

4.6 D²PAK packing information

Figure 27. D²PAK tape drawing (dimensions are in mm)

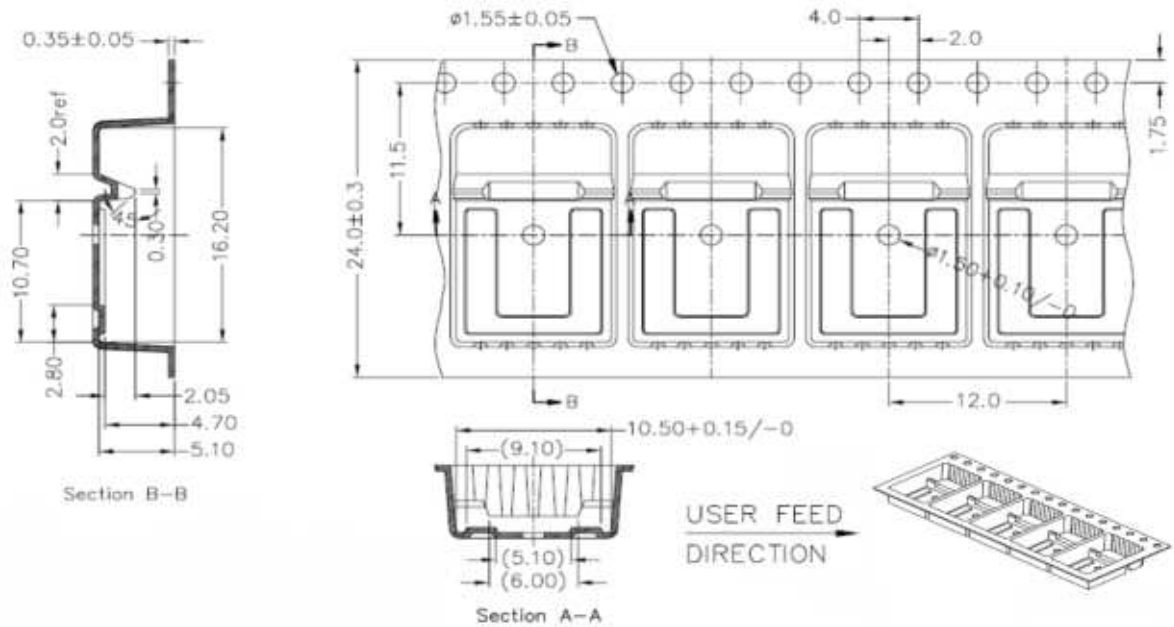

DM01095771_2



5 Ordering information

Table 13. Order codes

Order codes	Marking	Package	Packing
STB11NM80T4	B11NM80	D ² PAK	Tape and reel
STF11NM80	F11NM80	TO-220FP	Tube
STI11NM80	I11NM80	I ² PAK	
STP11NM80	P11NM80	TO-220	
STW11NM80	W11NM80	TO-247	

Revision history

Table 14. Document revision history

Date	Revision	Changes
30-Sep-2004	4	Preliminary version
26-Nov-2005	5	Complete version
07-Apr-2006	6	Modified value on <i>Figure 8</i>
15-May-2006	7	New dv/dt value on <i>Table 5</i>
20-Jul-2006	8	The document has been reformatted
20-Dec-2007	9	Updated I_D value on <i>Table 2: Absolute maximum ratings</i>
24-Mar-2010	10	Inserted dv/dt value in <i>Table 2: Absolute maximum ratings</i>
12-Sep-2011	11	Added new package and mechanical data : I ² PAK Minor text changes
17-Sep-2025	12	Updated Section 4: Package information . Minor text changes.



Contents

1	Electrical ratings	2
2	Electrical characteristics	3
2.1	Electrical characteristics (curves)	5
3	Test circuits	8
4	Package information	9
4.1	D ² PAK (TO-263) type A package information	9
4.2	TO-220FP type B package information	12
4.3	I ² PAK package information	14
4.4	TO-220 type A package information	16
4.5	TO-247 package information	18
4.6	D ² PAK packing information	20
5	Ordering information	21
	Revision history	22



IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers' market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved