STGW80H65DFB-4

Datasheet

Trench gate field-stop 650 V, 80 A high speed HB series IGBT



TO247-4



NG4K3E2C1_TAB

Features

- $V_{CE(sat)}$ = 1.6 V (typ.) @ I_C = 80 A
- Maximum junction temperature: T_J = 175 °C
- High speed switching series
- Minimized tail current
- Tight parameter distribution
- Safe paralleling
- Low thermal resistance
- Very fast soft recovery antiparallel diode
- Excellent switching performance thanks to the extra driving kelvin pin

Applications

- Photovoltaic inverters
- High frequency converters

Description

This device is an IGBT developed using an advanced proprietary trench gate field-stop structure. The device is part of the new HB series of IGBTs, which represents an optimum compromise between conduction and switching loss to maximize the efficiency of any frequency converter. A faster switching event can be achieved by the Kelvin pin, which separates power path from driving signal. Furthermore, the slightly positive $V_{CE(sat)}$ temperature coefficient and very tight parameter distribution result in safer paralleling operation.

Product status link
STGW80H65DFB-4

Product summary	
Order code	STGW80H65DFB-4
Marking	G80H65DFB
Package	TO247-4
Packing	Tube

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CES}	Collector-emitter voltage (V_{GE} = 0 V)	650	V
I_C	Continuous collector current at T_C = 25 °C	120 (1)	A
	Continuous collector current at T_C = 100 °C	80	
I_{CP} (2)	Pulsed collector current (t_p ≤ 1 µs, T_J < 175 °C)	300	A
V_{GE}	Gate-emitter voltage	±20	V
	Transient gate-emitter voltage	±30	V
I_F	Continuous forward current at T_C = 25 °C	120 (1)	A
	Continuous forward current at T_C = 100 °C	80	
I_{FP} (2)	Pulsed forward current (t_p ≤ 1 µs, T_J < 175 °C)	300	A
P_{TOT}	Total power dissipation at T_C = 25 °C	470	W
T_{STG}	Storage temperature range	- 55 to 150	°C
T_J	Operating junction temperature range	- 55 to 175	

1. *Current level is limited by bond wires*
2. *Defined by design, not subject to production test.*

Table 2. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance junction-case IGBT	0.32	°C/W
R_{thJC}	Thermal resistance junction-case diode	0.66	
R_{thJA}	Thermal resistance junction-ambient	50	

2 Electrical characteristics

T_C = 25 °C unless otherwise specified

Table 3. Static characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CES}$	Collector-emitter breakdown voltage	V_{GE} = 0 V, I_C = 2 mA	650			V
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{GE} = 15 V, I_C = 80 A		1.6	2.0	V
		V_{GE} = 15 V, I_C = 80 A, T_J = 125 °C		1.8		
		V_{GE} = 15 V, I_C = 80 A, T_J = 175 °C		1.9		
V_F	Forward on-voltage	I_F = 80 A		2.15	2.8	V
		I_F = 80 A, T_J = 125 °C		1.8		
		I_F = 80 A, T_J = 175 °C		1.7		
$V_{GE(th)}$	Gate threshold voltage	V_{CE} = V_{GE}, I_C = 1 mA	5	6	7	V
I_{CES}	Collector cut-off current	V_{GE} = 0 V, V_{CE} = 650 V			100	µA
I_{GES}	Gate-emitter leakage current	V_{CE} = 0 V, V_{GE} = ±20 V			±250	nA

Table 4. Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{ies}	Input capacitance	V_{CE}= 25 V, f = 1 MHz, V_{GE} = 0 V	-	10524	-	pF
C_{oes}	Output capacitance		-	385	-	
C_{res}	Reverse transfer capacitance		-	215	-	
Q_g	Total gate charge	V_{CC} = 520 V, I_C = 80 A, V_{GE} = 0 to 15 V (see Figure 29. Gate charge test circuit)	-	414	-	nC
Q_{ge}	Gate-emitter charge		-	78	-	
Q_{gc}	Gate-collector charge		-	170	-	

Table 5. IGBT switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{CE} = 400 V, I_C = 80 A, V_{GE} = 15 V, R_G = 10 Ω (see Figure 28. Test circuit for inductive load switching)		75	-	ns
t_r	Current rise time			35	-	
$(di/dt)_{on}$	Turn-on current slope			1750	-	A/µs
$t_{d(off)}$	Turn-off-delay time			336	-	ns
t_f	Current fall time			23	-	
E_{on} (1)	Turn-on switching energy			1	-	mJ
E_{off} (2)	Turn-off switching energy			1.7	-	
E_{ts}	Total switching energy			2.7	-	
$t_{d(on)}$	Turn-on delay time	V_{CE} = 400 V, I_C = 80 A, V_{GE} = 15 V, R_G = 10 Ω, T_J = 175 °C (see Figure 28. Test circuit for inductive load switching)		66	-	ns
t_r	Current rise time			38	-	
$(di/dt)_{on}$	Turn-on current slope			1670	-	A/µs
$t_{d(off)}$	Turn-off-delay time			403	-	ns
t_f	Current fall time			45	-	
E_{on} (1)	Turn-on switching energy			1.5	-	mJ
E_{off} (2)	Turn-off switching energy			2.47	-	
E_{ts}	Total switching energy			3.97	-	

1. *Including the reverse recovery of the diode.*
2. *Including the tail of the collector current.*

Table 6. Diode switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	I_F = 80 A, V_R = 400 V, V_{GE} = 15 V di/dt = 1000 A/µs (see Figure 28. Test circuit for inductive load switching)	-	112	-	ns
Q_{rr}	Reverse recovery charge		-	955	-	nC
I_{rrm}	Reverse recovery current		-	27.2	-	A
dI_{rr}/dt	Peak rate of fall of reverse recovery current during t_b		-	1515	-	A/µs
E_{rr}	Reverse recovery energy		-	170	-	µJ
t_{rr}	Reverse recovery time	I_F = 80 A, V_R = 400 V, V_{GE} = 15 V, T_J = 175 °C di/dt = 1000 A/µs (see Figure 28. Test circuit for inductive load switching)	-	164	-	ns
Q_{rr}	Reverse recovery charge		-	3838	-	nC
I_{rrm}	Reverse recovery current		-	52	-	A
dI_{rr}/dt	Peak rate of fall of reverse recovery current during t_b		-	785	-	A/µs
E_{rr}	Reverse recovery energy		-	635	-	µJ

2.1 Electrical characteristics (curves)

Figure 1. Power dissipation vs. case temperature

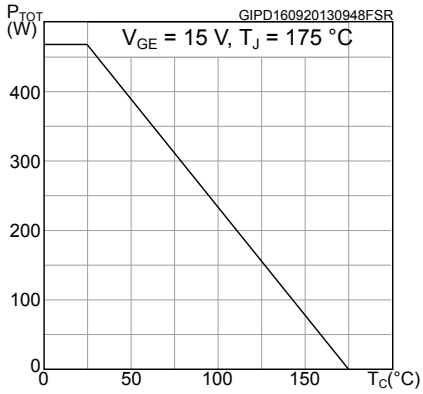

Figure 2. Collector current vs. case temperature

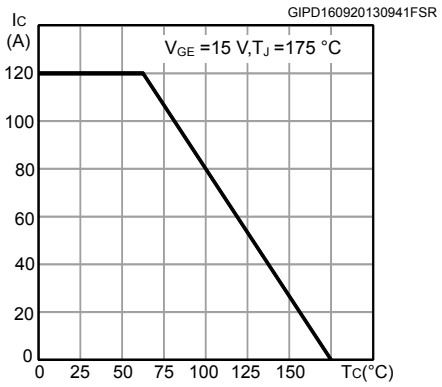

Figure 3. Output characteristics (T_J = 25 °C)

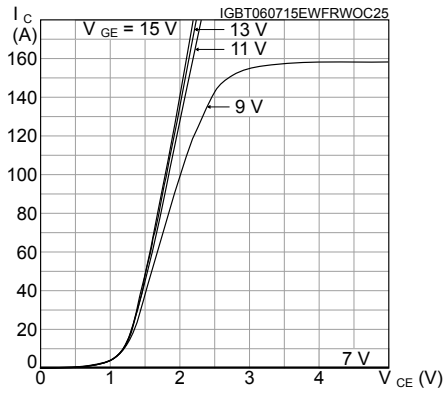

Figure 4. Output characteristics (T_J = 175 °C)

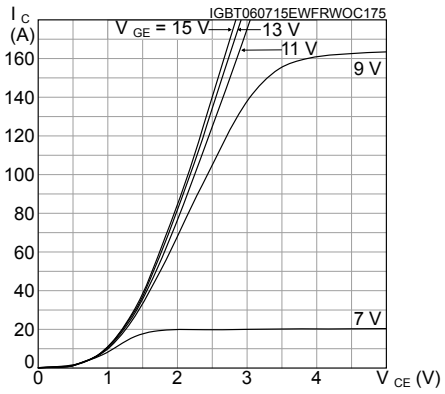

Figure 5. V_{CE}(sat) vs. junction temperature

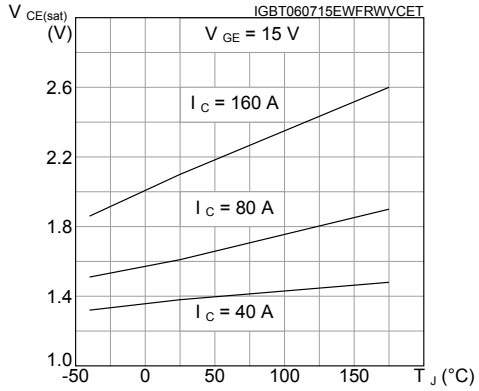

Figure 6. V_{CE}(sat) vs. collector current

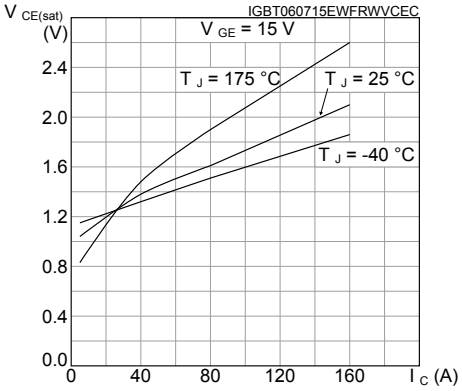

Figure 7. Collector current vs. switching frequency

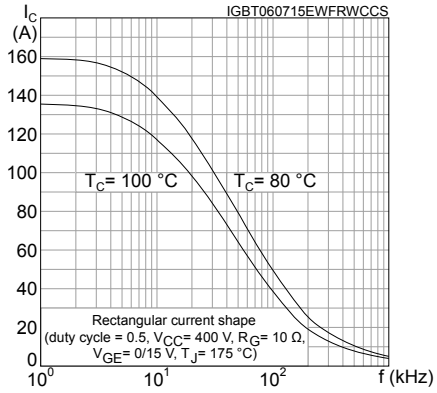

Figure 8. Forward bias safe operating area

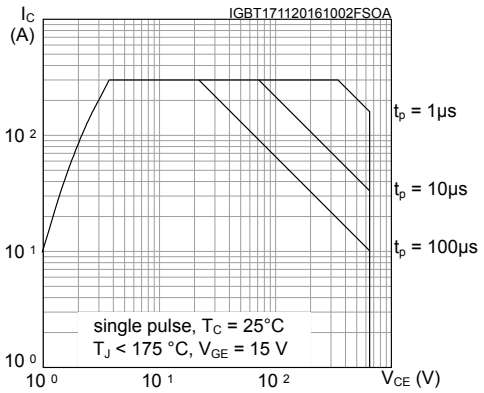

Figure 9. Transfer characteristics

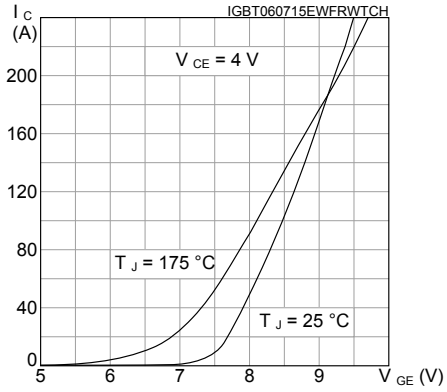

Figure 10. Diode V_F vs. forward current

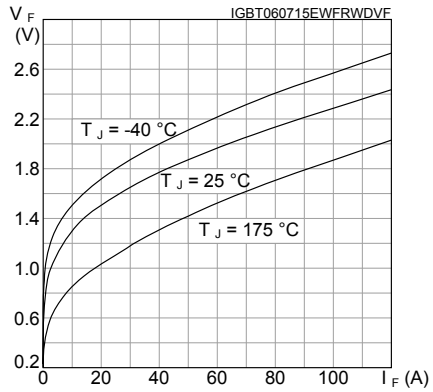

Figure 11. Normalized $V_{GE(th)}$ vs. junction temperature

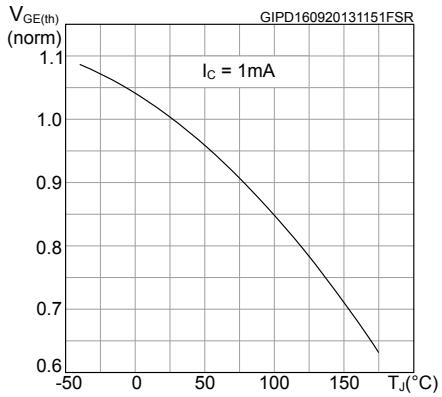

Figure 12. Normalized $V_{(BR)CES}$ vs. junction temperature

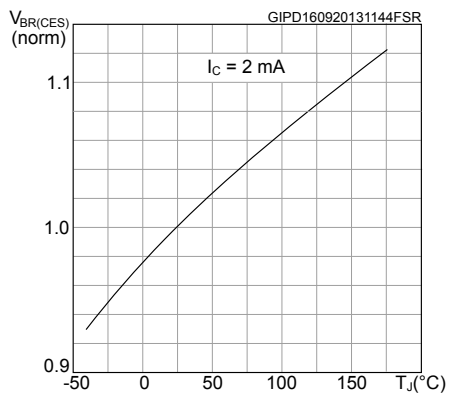

Figure 13. Capacitance variations

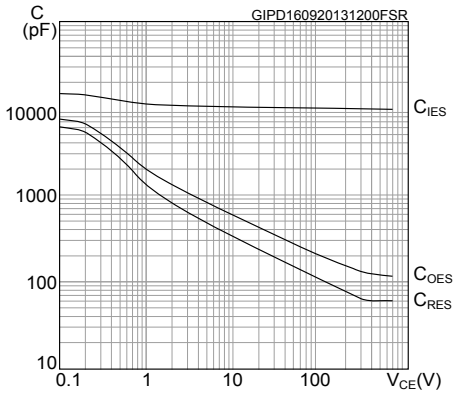

Figure 14. Gate charge vs. gate-emitter voltage

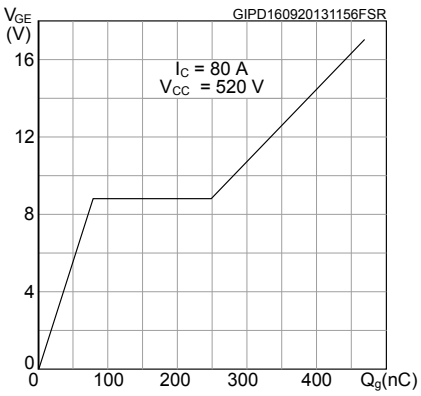

Figure 15. Switching energy vs. collector current

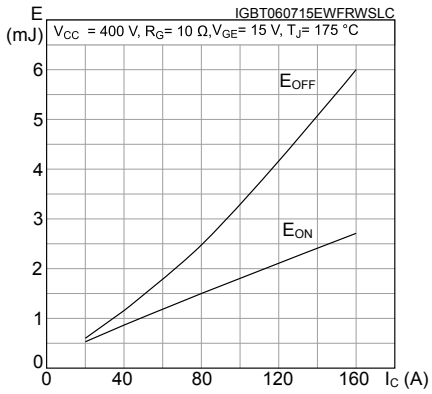

Figure 16. Switching energy vs. gate resistance

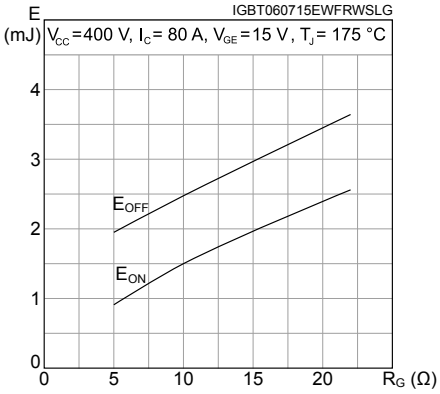

Figure 17. Switching energy vs. temperature

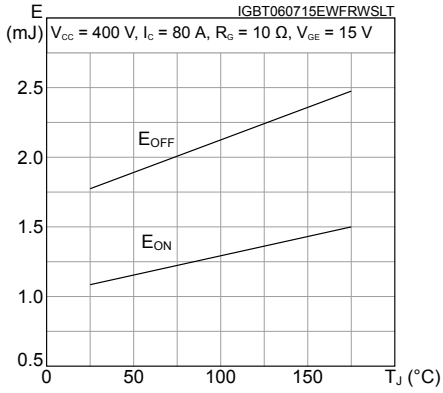

Figure 18. Switching energy vs. collector emitter voltage

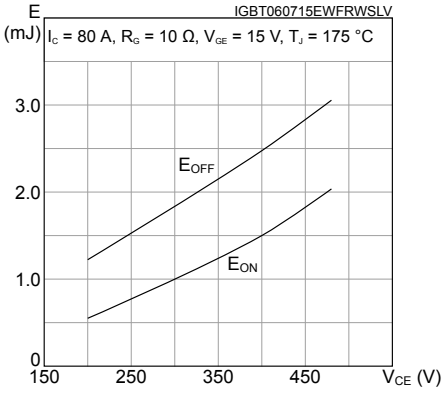

Figure 19. Switching times vs. collector current

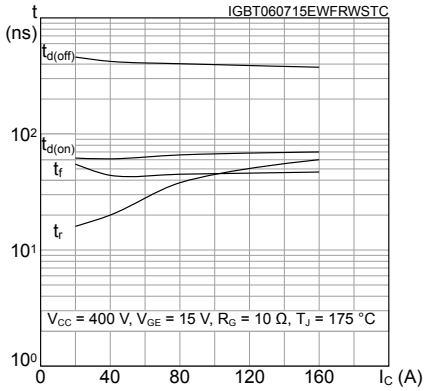

Figure 20. Switching times vs. gate resistance

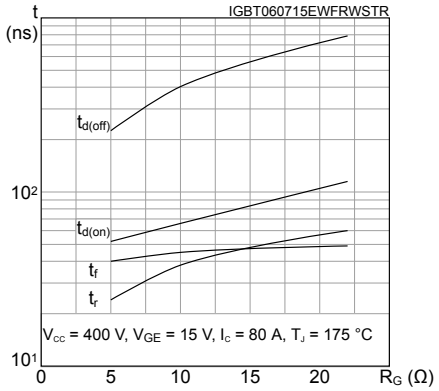

Figure 21. Reverse recovery current vs. diode current slope

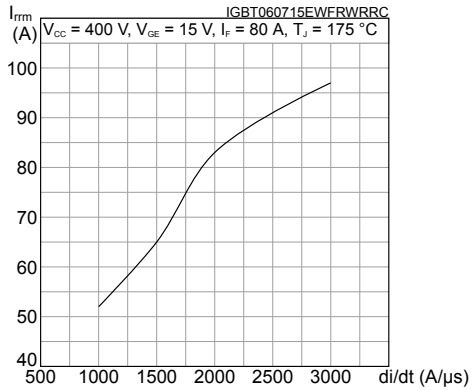

Figure 22. Reverse recovery time vs. diode current slope

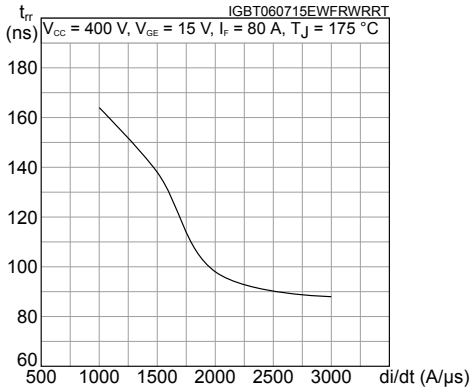

Figure 23. Reverse recovery charge vs. diode current slope

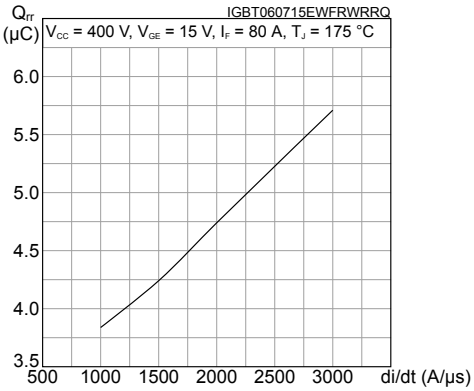

Figure 24. Reverse recovery energy vs. diode current slope

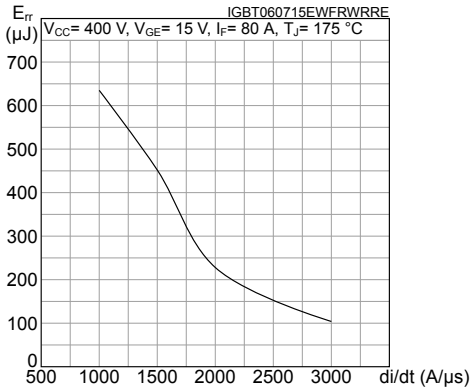

Figure 25. Thermal impedance for IGBT

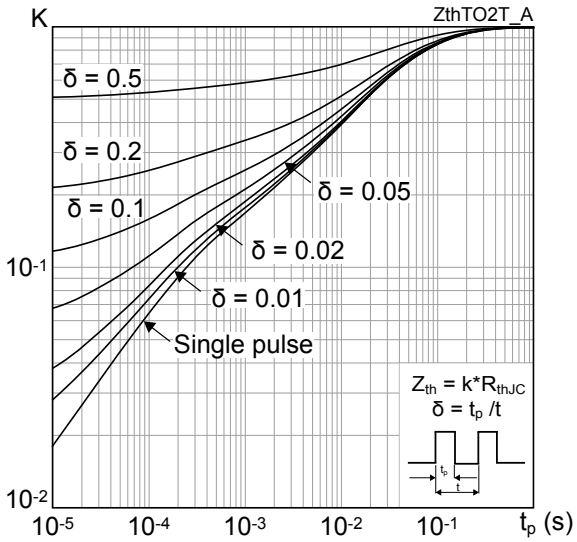

Figure 26. Thermal impedance for diode

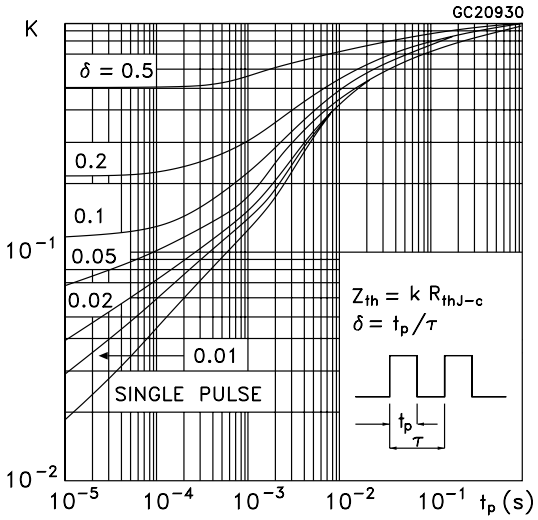

3 Test circuits

Figure 27. Test circuit for inductive load switching

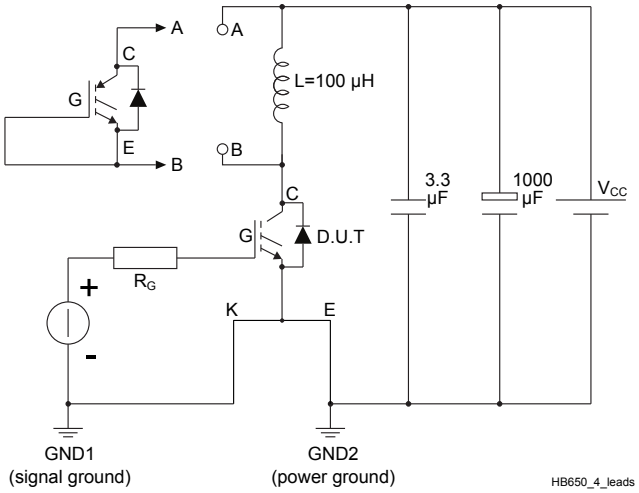

Figure 28. Gate charge test circuit

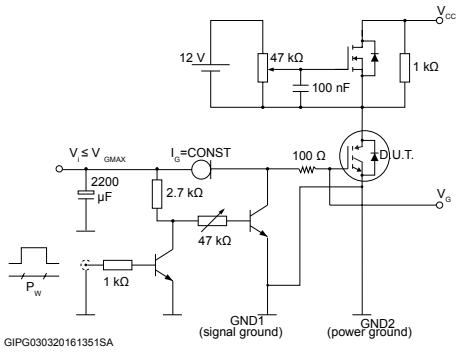

Figure 29. Switching waveform

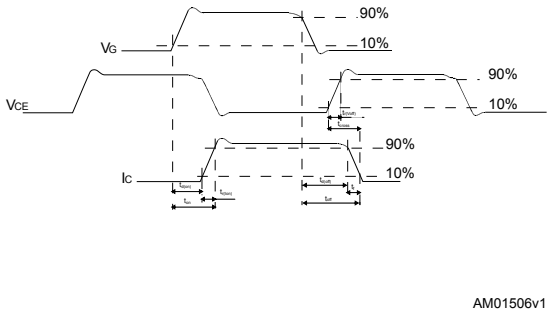

Figure 30. Diode reverse recovery waveform

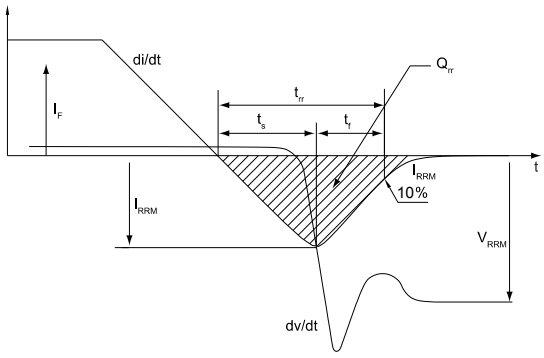

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

4.1 TO247-4 package information

Figure 31. TO247-4 package outline

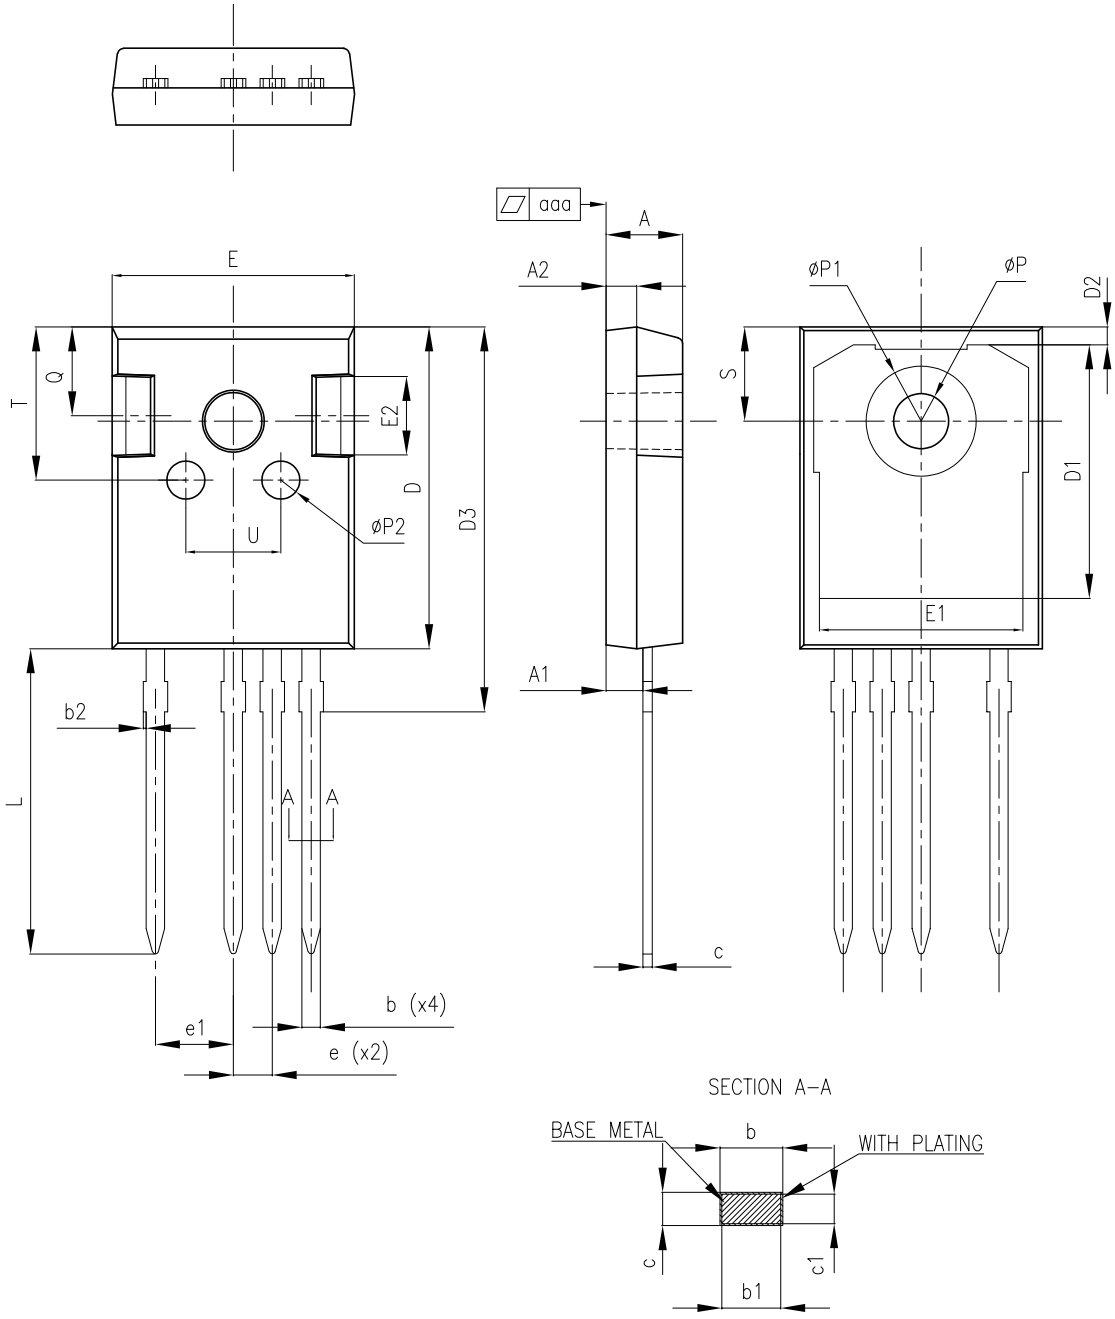

8405626_Rev_3

Table 7. **TO247-4 mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
b	1.16		1.29
b1	1.15	1.20	1.25
b2	0		0.20
c	0.59		0.66
c1	0.58	0.60	0.62
D	20.90	21.00	21.10
D1	16.25	16.55	16.85
D2	1.05	1.20	1.35
D3	24.97	25.12	25.27
E	15.70	15.80	15.90
E1	13.10	13.30	13.50
E2	4.90	5.00	5.10
E3	2.40	2.50	2.60
e	2.44	2.54	2.64
e1	4.98	5.08	5.18
L	19.80	19.92	20.10
P	3.50	3.60	3.70
P1			7.40
P2	2.40	2.50	2.60
Q	5.60		6.00
S		6.15	
T	9.80		10.20
U	6.00		6.40
aaa		0.04	0.10

Revision history

Table 8. **Document revision history**

Date	Revision	Changes
05-Aug-2015	1	First release.
17-Nov-2016	2	Updated features in cover page. Updated *Table 2: "Absolute maximum ratings"* and *Figure 9: "Forward bias safe operating area"*. Minor text changes.
03-Mar-2017	3	Updated the title in cover page, *Table 2: "Absolute maximum ratings"*,*Table 4: "Static characteristics"* and *Table 6: "IGBT switching characteristics (inductive load)"*. Minor text changes.
03-Jul-2019	4	Updated *Table 1. Absolute maximum ratings.* Minor text changes.
03-Dec-2021	5	Updated Table 4. Dynamic characteristics. Updated Section 4.1 TO247-4 package information.

Contents

1 **Electrical ratings** 2

2 **Electrical characteristics** 3

2.1 Electrical characteristics (curves) 5

3 **Test circuits** 10

4 **Package information** 11

4.1 TO247-4 package information 11

Revision history 13

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved