
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

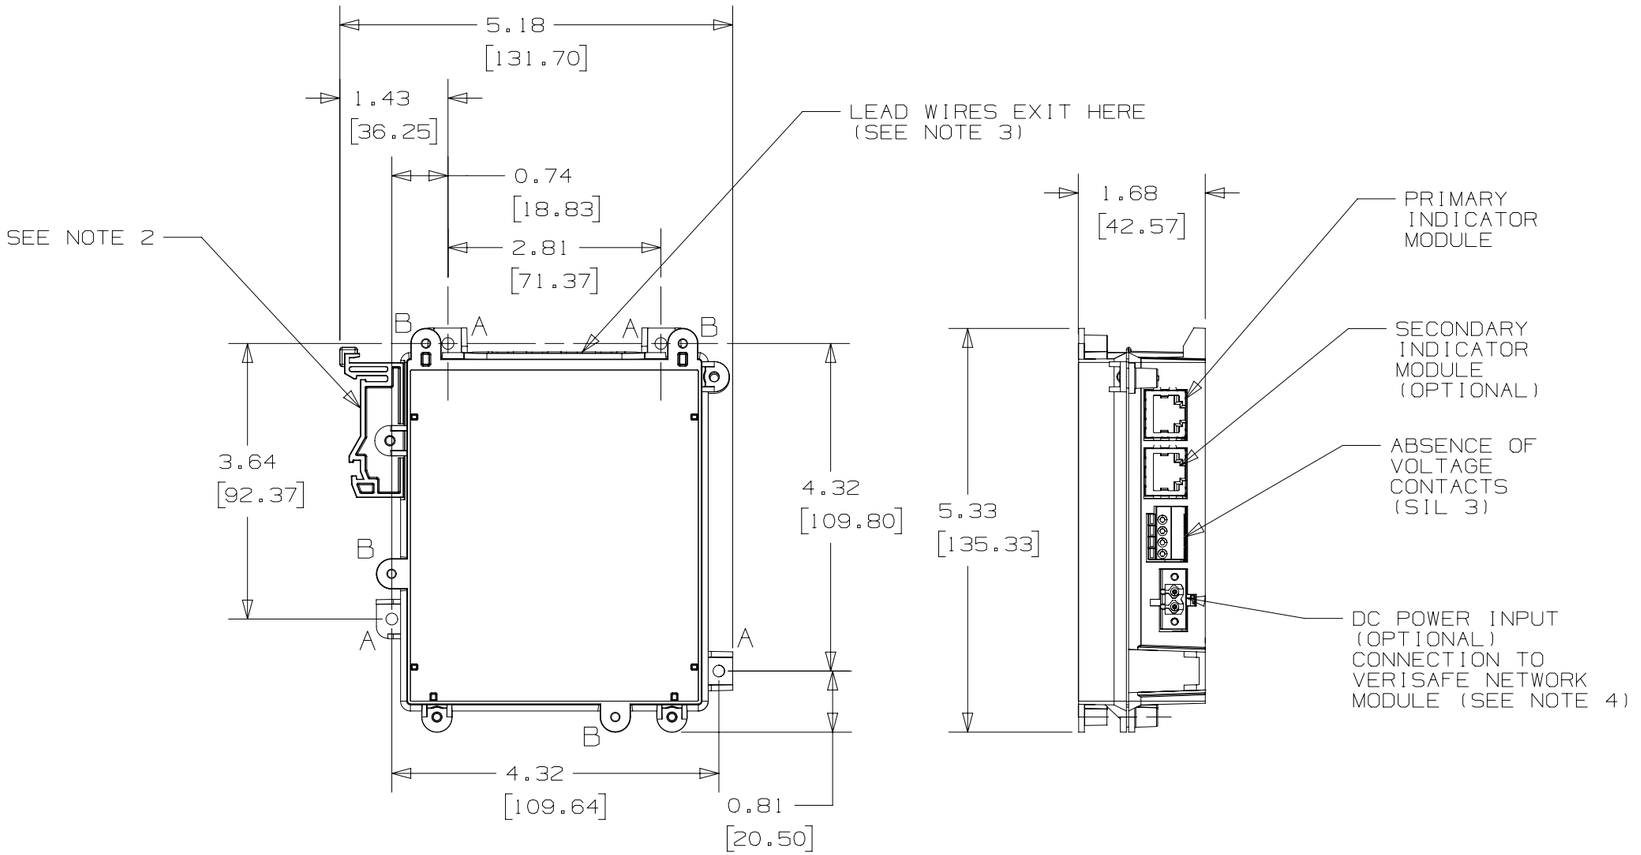

ISOLATION MODULE

UNIT MOUNTING LOCATIONS MARKED "A" (SEE NOTE 1)
VS2-NET ATTACHMENT POINTS MARKED "B"

NOTES:

NOT A COMPLETE ASSEMBLY; INDICATOR MODULE AND SYSTEM CABLE REQUIRED FOR USE

1. **Mount for #4 or #6 Pan Head Screw, 3 Places, Min.**
2. **DIN Rail Mounting Feature**
3. **Lead Wires, QTY 6 or 8 - 14 AWG (2.08mm2)**
4. **Mating Connector Included. (VS2-NET connection if used).**

READ PRODUCT INSTRUCTIONS BEFORE USING

PANDUIT PART NUMBER:

VS2-AVT-3P-ISO
VS2-AVT-1P-ISO

GENERAL SPECIFICATIONS:

Voltage detection Range: Up to 1000VAC (50/60Hz), 1000VDC
Overvoltage Category: CAT III (1000V); CAT IV (600V)

Environmental
Operating Temperature: -25°C to +60°C (-13°F to 140°F)
Storage Temperature: -45°C tp +85°C (-49°F to +185°F)
Humidity: 5 to 90% non-condensing; Rated 80% at 40°C, decreasing linearly to 50% at 60°C
Pollution Degree: 3
Altitude: Up to 5000 meters
Power:
Optional DC Power: 12-24VDC, 43mA @ 24V

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
0	4/20/22	DFA	ZSG	MSAD	INITIAL RELEASE	GAECN06494

TITLE: VERISAFE 2.0 AVT ISOLATION MODULE

CUSTOMER DRAWING

ITEM REVISION NAME: 181216AP/00

DATASET FILE NAME: 181216AP_DC/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .06 [1.50] .xxx ± .01 [.25]
.xx ± .02 [.50] ANGLES ± 5°
THIRD ANGLE PROJECTION

MATERIAL: N/A

DRAWING NUMBER: 181216AP_DC

DRAWN BY	DATE	CHK	SCALE	SIZE
DFA	4/21/22	MSAD	NONE	B

SHT 1 OF 1

D10100DB/17