This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1			01/24/08	IP

D-SUB TECHNICAL DATA


SHELL : Steel 2.5um(100u") min tin over 1.25um(50u") min nickel


BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0 Color Black

ELECTRICAL : Voltage rating 300 V RMS at 50 Hz
Withstanding Voltage >1000 V RMS at 50 Hz for one minute
Insulation resistance >5000 M Ohms

CLIMATIC : Temperature range -55 °C up to 155°C
Damp heat 56 days(40 °C-95% HR)

MARKING : Amphenol-...(Series No.)
Commercial reference
Manufacturing date

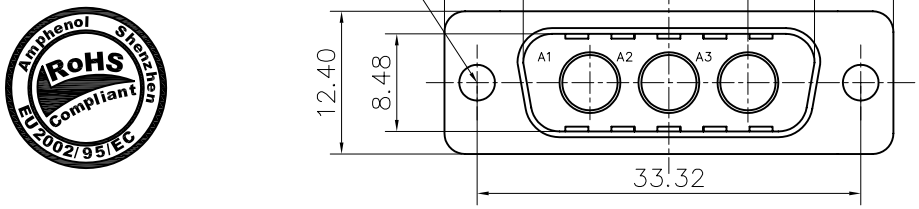

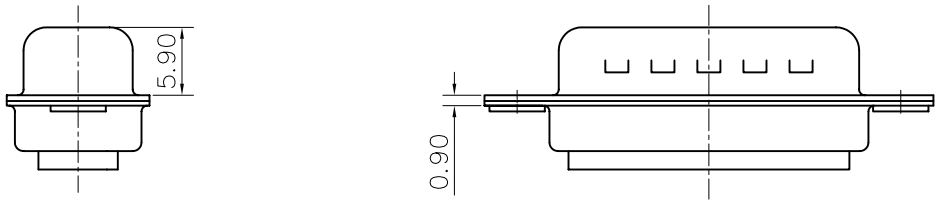

Customer drawing

PRODUCT CODE

L 717TW A 3W3 P

- L: RoHS Compliance
- 717TW: tinned shell with dimples
- Shell Size :A
- Contact type: S:Female P: Male
- Configuration: 3W3

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.30
.XXX +/-		0.20
FRACTIONS +/-		
ANGLES +/-		2°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS U.S. INCHES METRIC MM

	APPROVAL	DATE
DRAWN	Helen.Jiang	07/03/07
CHECKED	Hk.wang	07/03/07
CHECKED		

DRAWING FILE : drawing\Dsub\ML717TWA3W3P

ANGLE OF PROJECTION

Amphenol

TITLE: Hybrid connector, TW series

SIZE	DRAWING NO.	REV.
A4	C L717TWA3W3P	1

SCALE NONE SHEET 1 OF 1