Datasheet No – PD97383
March 17, 2009

International
IOR Rectifier

IRS21962S

Dual channel high-side drivers with floating input

Features

- Two independent high side output channels
- CMOS Schmitt trigger inputs with pull down resistor
- 5V compatible logic level inputs
- Immune to –Vs spike and tolerant to dVs/dt and dVss/dt
- Typical operating frequency 200kHz
- RoHS compliant

Product Summary


V_{OFFSET}	600 V
V_{OUT}	10 V – 20 V
I_{o+} & I_{o-} (typical)	0.5 A
t_{ON} & t_{OFF} (typical)	90 ns

Package Type



16-Lead SOIC (narrow body)

Typical Connection Diagram

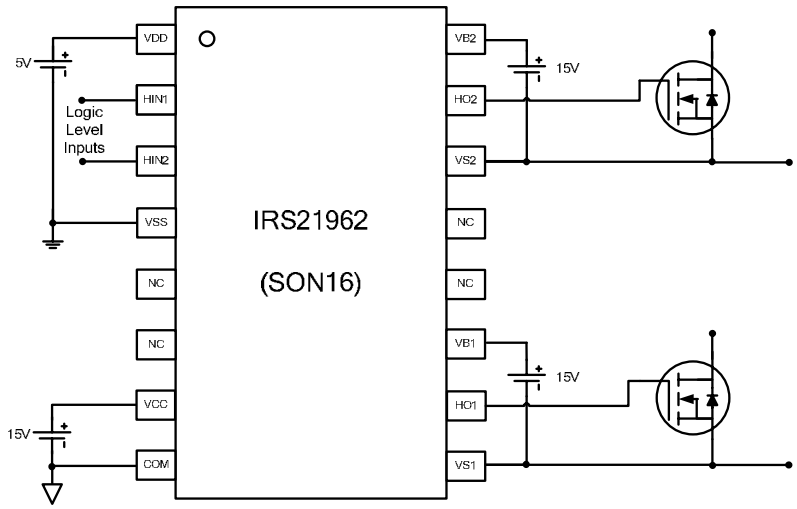

© 2007 International Rectifier

Table of Contents	Page
Description	3
Qualification Information	4
Absolute Maximum Ratings	5
Recommended Operating Conditions	5
Static Electrical Characteristics	6
Dynamic Electrical Characteristics	6
Functional Block Diagram	7
Input/Output Pin Equivalent Circuit Diagram	9
Lead Definitions	10
Lead Assignments	10
Package Details	11
Tape and Reel Details	12
Part Marking Information	13
Ordering Information	14

© 2008 International Rectifier

Description

The IRS21962 is a high voltage, high speed power MOSFET and IGBT driver with propagation delay matched output channels. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. The floating logic input is compatible with standard 5 V CMOS or LSTTL logic and can be operated up to 600 volts above the COM ground. The output driver feature a 500 mA high pulse current buffer stage designed for minimum driver cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration, which operates up to 600 V above COM ground.

© 2008 International Rectifier

Qualification Information†

Qualification Level		Industrial††	
		Comments: This family of ICs has passed JEDEC's Industrial qualification. IR's Consumer qualification level is granted by extension of the higher Industrial level.	
Moisture Sensitivity Level		SOIC16N	MSL2††† 260°C (per IPC/JEDEC J-STD-020)
ESD	Machine Model	Class B (per JEDEC standard JESD22-A115)	
	Human Body Model	Class 2 (per EIA/JEDEC standard EIA/JESD22-A114)	
IC Latch-Up Test		Class 1, Level A (per JESD78)	
RoHS Compliant		Yes	

† Qualification standards can be found at International Rectifier's web site http://www.irf.com/

†† Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information.

††† Higher MSL ratings may be available for the specific package types listed here. Please contact your International Rectifier sales representative for further information.

© 2008 International Rectifier

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM, which is the –200V DC bus provided externally.

Symbol	Definition	Min	Max	Units
VCC	Low side supply voltage	-0.3	25	V
VDD	Input logic supply voltage	-0.3	625	V
VSS	Input logic supply return	VDD-25	VDD+0.3	V
HIN1, HIN2	Input logic voltage	VSS-0.3	VDD+0.3	V
VB1, VB2	High side floating well positive supply voltage	-0.3	625	V
VS1	High side floating well negative supply voltage	VB1-25	VB1+0.3	V
VS2	High side floating well negative supply voltage	VB2-25	VB2+0.3	V
HO1	Floating gate drive output voltage	VS1-0.3	VB1+0.3	V
HO2	Floating gate drive output voltage	VS2-0.3	VB2+0.3	V
dVS/dt	Allowable VS1 or VS2 offset supply transient relative to COM	-	50	V/ns
dVSS/dt	Allowable VSS input supply transient relative to COM	-	50	V/ns
P_D	Package Power Dissipation @ T_A<=+25°C	-	1	W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	-	100	°C/W
T_J	Junction Temperature	-55	150	°C
T_S	Storage Temperature	-55	150	°C
T_L	Lead temperature (Soldering, 10 seconds)	-	300	°C

Recommended Operating Conditions

For proper operation, the device should be used within the recommended conditions. All voltage parameters are absolute voltages referenced to COM, which is the –200V DC bus provided externally. The offset rating are tested with supplies of (VDD-VSS)=5V and (VCC-COM)=(VB1-VS1)= (VB2-VS2)=15V.

Symbol	Definition	Min	Max	Units
VCC	Low side supply voltage	10	20	V
VDD	Input logic supply voltage	VSS+4.5	VSS+5.5	V
VSS	Input logic supply offset voltage	-0.3	600	V
HIN1, HIN2	IN1~IN2 input voltage	VSS	VDD	V
VB1	High side floating well positive supply voltage	VS1+10	VS1+20	V
VB2	High side floating well positive supply voltage	VS2+10	VS2+20	V
VS1, VS2	High side floating well negative supply voltage	-5	600	V
HO1	Floating gate drive output voltage	VS1	VB1	V
HO2	Floating gate drive output voltage	VS2	VB2	V
T_A	Ambient Temperature	-40	125	°C

© 2008 International Rectifier

Static Electrical Characteristics

(VDD-VSS)=5V and (VCC-COM)=(VBn-VSn)=15V. T_A = 25°C. The parameters VIN,th+, VIN,th-, IIN+, IIN-, V_{DDUV+}, and V_{DDUV-} are referenced to VSS. The V_{BSUV+}, V_{BSUV-}, VOH, VOL, IO+, and IO- parameters are referenced to VS1 or VS2. The V_{CCUV+}, V_{CCUV-} parameters are referenced to COM.

Symbol	Definition	Min	Typ	Max	Units	Test Conditions
V_{DDUV+}	V_{DD} supply undervoltage positive going threshold		4.0		V	V_{SS} -COM = 5V
V_{DDUV-}	V_{DD} supply undervoltage negative going threshold		3.9		V	V_{SS} -COM = 5V
V_{DDUVH}	V_{DD} supply undervoltage lockout hysteresis		0.1		V	V_{SS} -COM = 5V
V_{CCUV+}	V_{CC} supply undervoltage positive going threshold	7.5	8.6	9.7	V	
V_{CCUV-}	V_{CC} supply undervoltage negative going threshold	7.1	8.2	9.3	V	
V_{CCUVH}	V_{CC} supply undervoltage lockout hysteresis	---	0.4	---	V	
V_{BSUV+}	V_{BS} supply undervoltage positive going threshold	7.5	8.3	9.4	V	
V_{BSUV-}	V_{BS} supply undervoltage negative going threshold	6.9	7.7	8.8	V	
V_{BSUVH}	V_{BS} supply undervoltage lockout hysteresis	---	0.6	---	V	
I_{LKDD}	Input Logic offset supply leakage current	---	---	50	µA	V_{DD} = V_{SS} = 600V
I_{LKBS}	Highside floating well offset supply leakage current	---	---	50		V_B = V_S = 600V
I_{QDD}	Quiescent VDD supply current	---	105	180		V_{IN} = 0V or 5V
I_{QBS}	Quiescent VBS supply current	---	100	175	uA	V_{IN} = 0V or 5V
I_{QCC}	Quiescent VCC supply current	---	180	280		V_{IN} = 0V or 5V
$V_{IN,th+}$	Logic “1” input threshold	3.5			V	
$V_{IN,th-}$	Logic “0” input threshold			0.6		
V_{OH}	High level output voltage, V_O -V_{BIAS}	---	---	1		Io+=20mA
V_{OL}	Low level output voltage, V_O	---	---	1		Io-=20mA
I_{IN+}	Logic “1” input bias current	---	5	---	uA	V_{IN}=5V
I_{IN-}	Logic “0” input bias current	---	0	---		V_{IN}=0V
I_{O+}	Output high short circuit pulsed current	---	500	---	mA	VO=15V, V_{IN}=5V, PW<=10us
I_{O-}	Output low short circuit pulsed current	---	500	---	mA	V_O=0V,V_{IN}=0VP, W<=10us

Dynamic Electrical Characteristics

(VDD-VSS)=5V and (VCC-COM)=(VBn-VSn)=15V. T_A = 25. °C C_L = 1000pF unless otherwise specified. All parameters are reference to COM.

Symbol	Definition	Min	Typ	Max	Unit	Test Conditions
t_{on}, t_{off}	Propagation delay from input pin HIN to output pin HO	55	90	125	ns	**Vss=200V, Vs=0V**
t_r	Turn-on 10%-to-90% rise time at HO pin		25	70	ns	**Vss=200V, Vs=0V**
t_f	Turn-off 90%-to-10% fall time at HO pin		25	70	ns	**Vss=200V, Vs=0V**

© 2008 International Rectifier

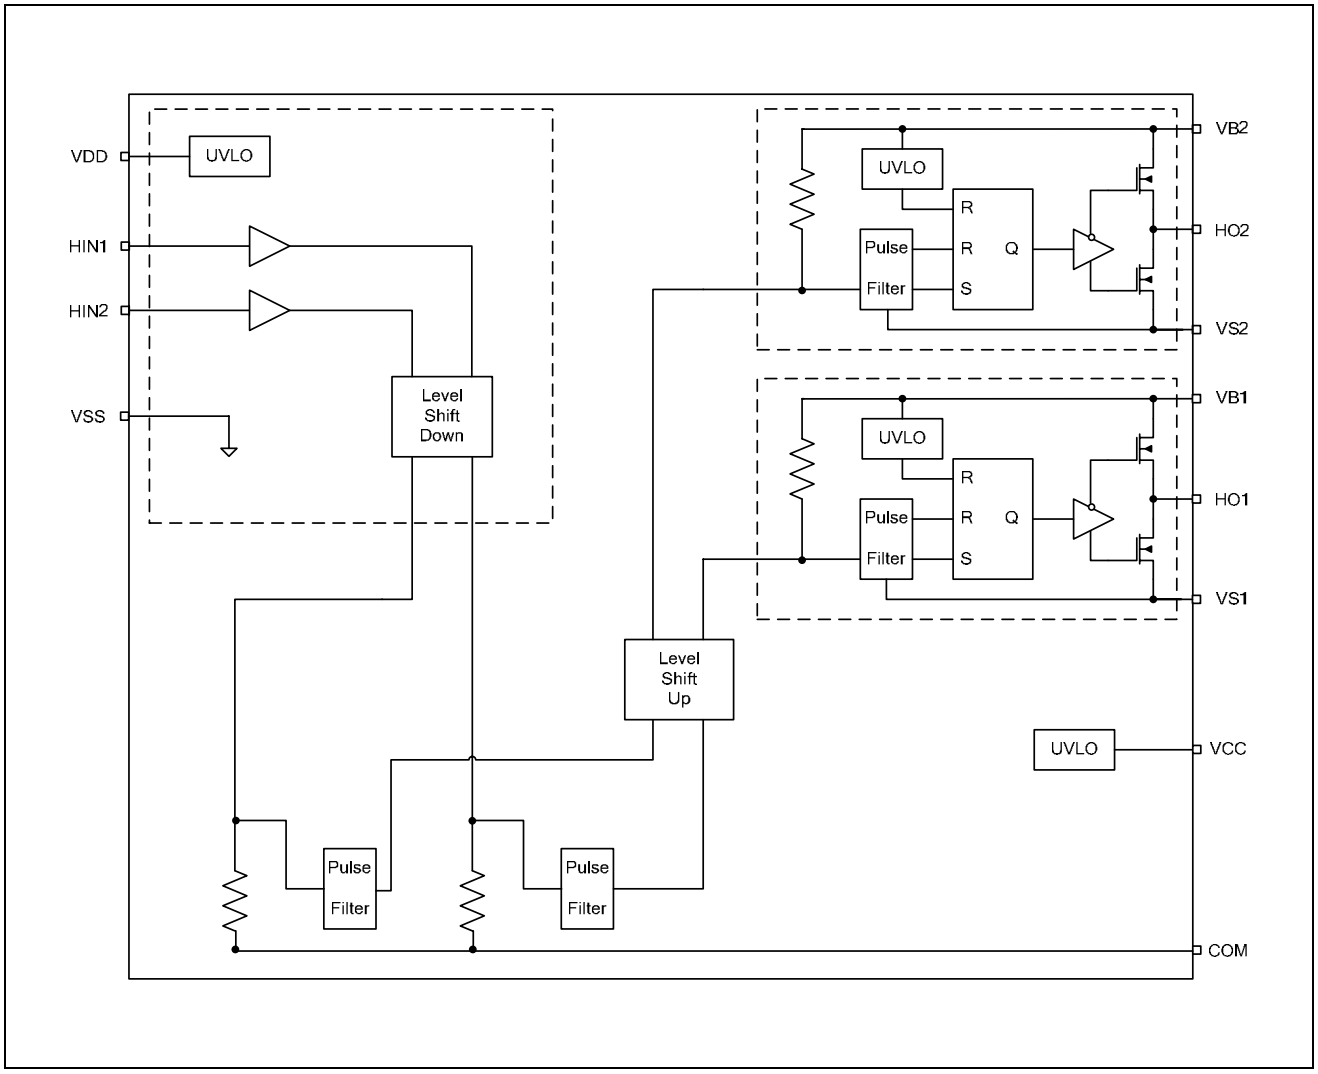


Figure 1 Functional Block Diagram

© 2008 International Rectifier

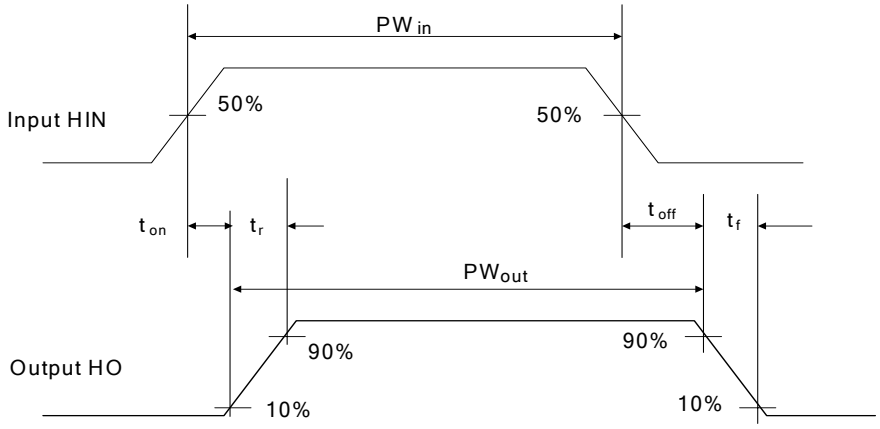


Figure 2 Switching Time Waveforms



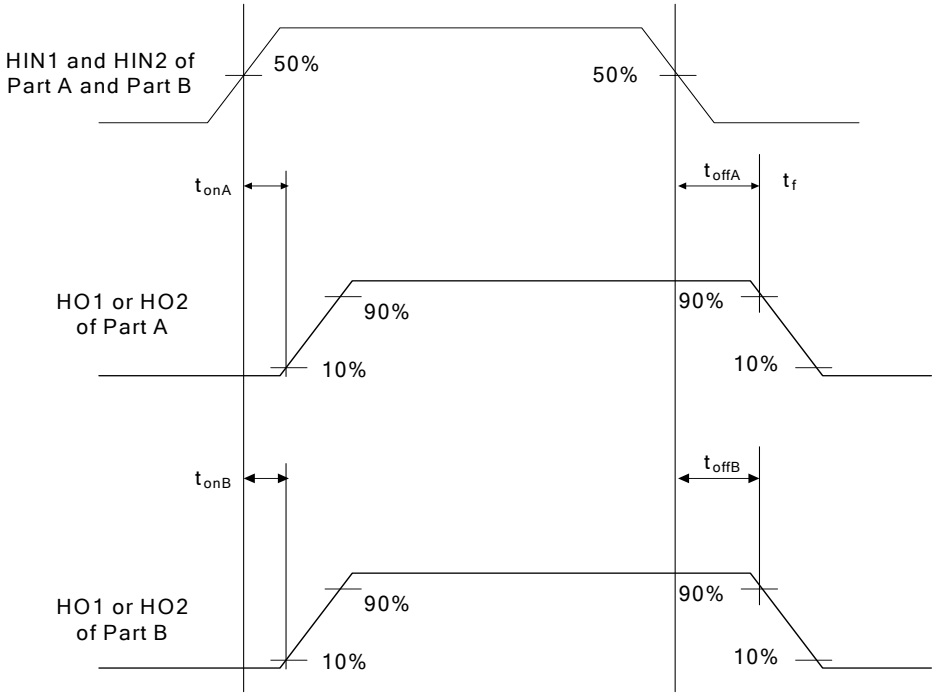



Figure 3 Switching Time Waveforms – Part to Part Propagation Delay Matching


© 2008 International Rectifier

Input/Output Pin Equivalent Circuit Diagrams



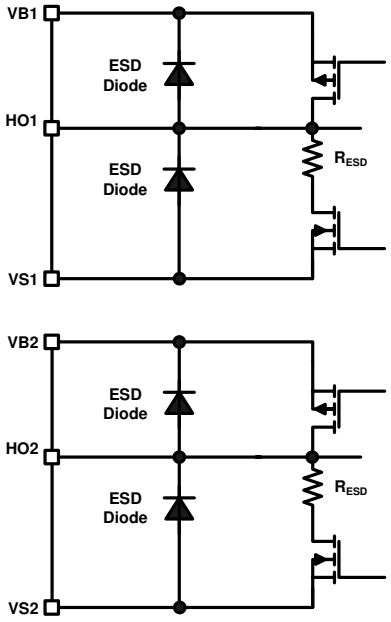






© 2008 International Rectifier

Lead Definitions:


Pin	Symbol	Description
1	VDD	Input logic supply voltage
2	HIN1	Logic input channel 1
3	HIN2	Logic input channel 2
4	VSS	Input logic offset voltage
5	NC	No connection
6	NC	No connection
7	VCC	Low side supply voltage
8	COM	Ground
9	VS1	High side floating well offset voltage
10	HO1	Floating gate driver output voltage channel 1
11	VB1	High side floating well positive supply
12	NC	No connection
13	NC	No connection
14	VS2	High side floating well offset voltage
15	HO2	Floating gate driver output voltage channel 2
16	VB2	High side floating well positive supply

Lead Assignments

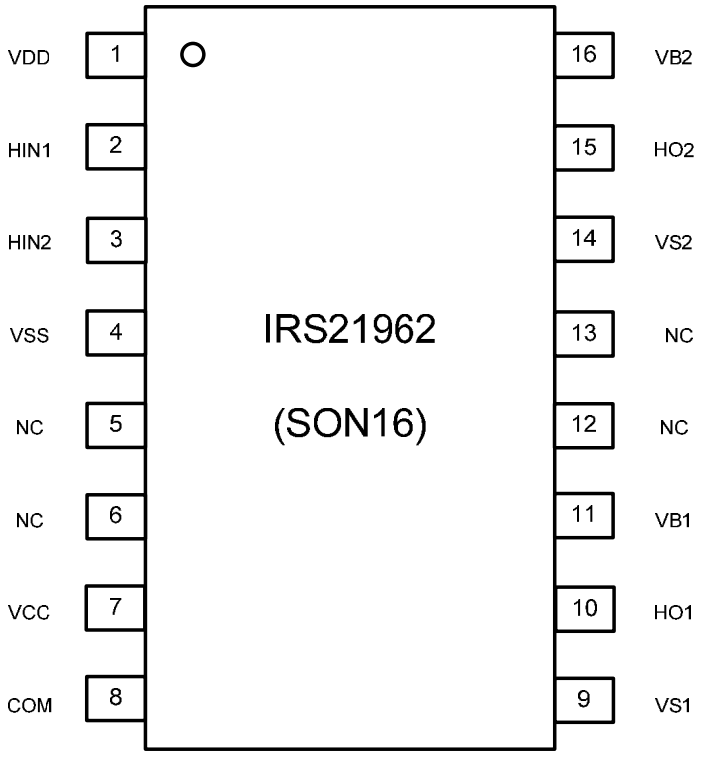


© 2008 International Rectifier

Package Details: SOIC16N

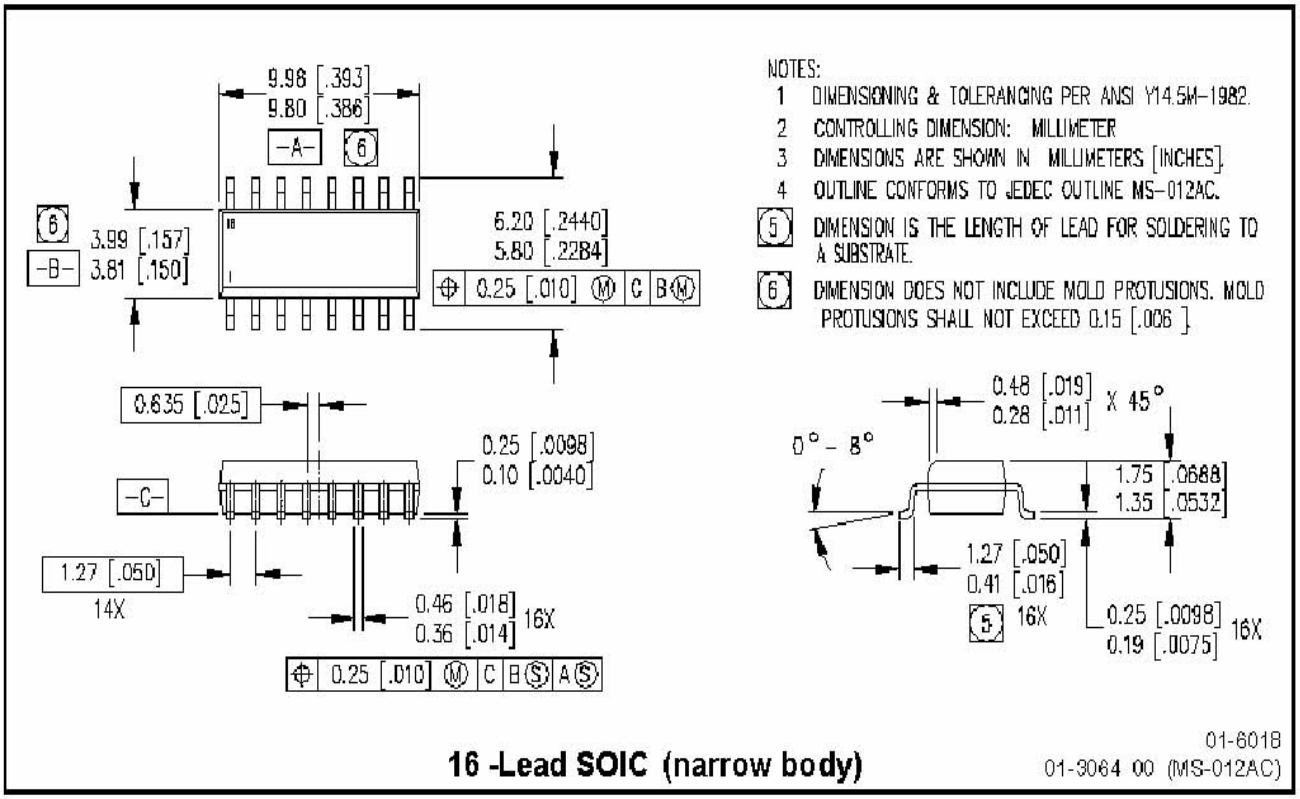


© 2008 International Rectifier

Tape and Reel Details: SOIC16N

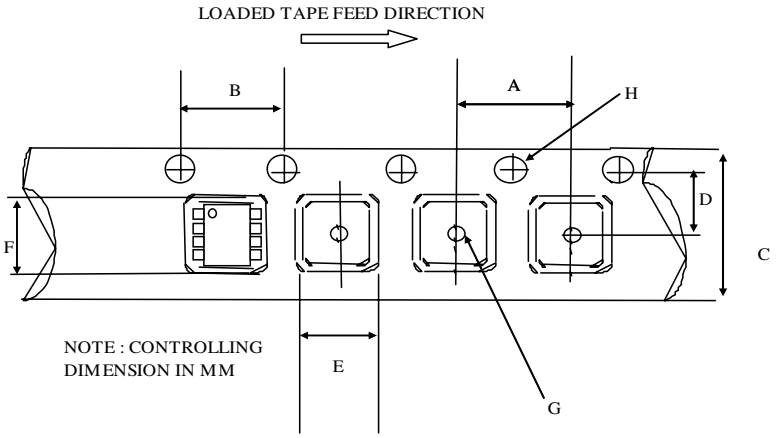

CARRIER TAPE DIMENSION FOR 16SOICN

Code	Metric		Imperial	
	Min	Max	Min	Max
A	7.90	8.10	0.311	0.318
B	3.90	4.10	0.153	0.161
C	15.70	16.30	0.618	0.641
D	7.40	7.60	0.291	0.299
E	6.40	6.60	0.252	0.260
F	10.20	10.40	0.402	0.409
G	1.50	n/a	0.059	n/a
H	1.50	1.60	0.059	0.062

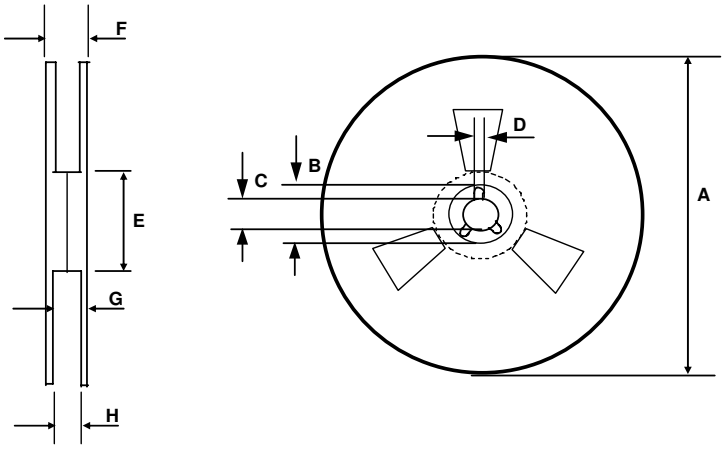


REEL DIMENSIONS FOR 16SOICN

Code	Metric		Imperial	
	Min	Max	Min	Max
A	329.60	330.25	12.976	13.001
B	20.95	21.45	0.824	0.844
C	12.80	13.20	0.503	0.519
D	1.95	2.45	0.767	0.096
E	98.00	102.00	3.858	4.015
F	n/a	22.40	n/a	0.881
G	18.50	21.10	0.728	0.830
H	16.40	18.40	0.645	0.724

© 2008 International Rectifier

Part Marking Information

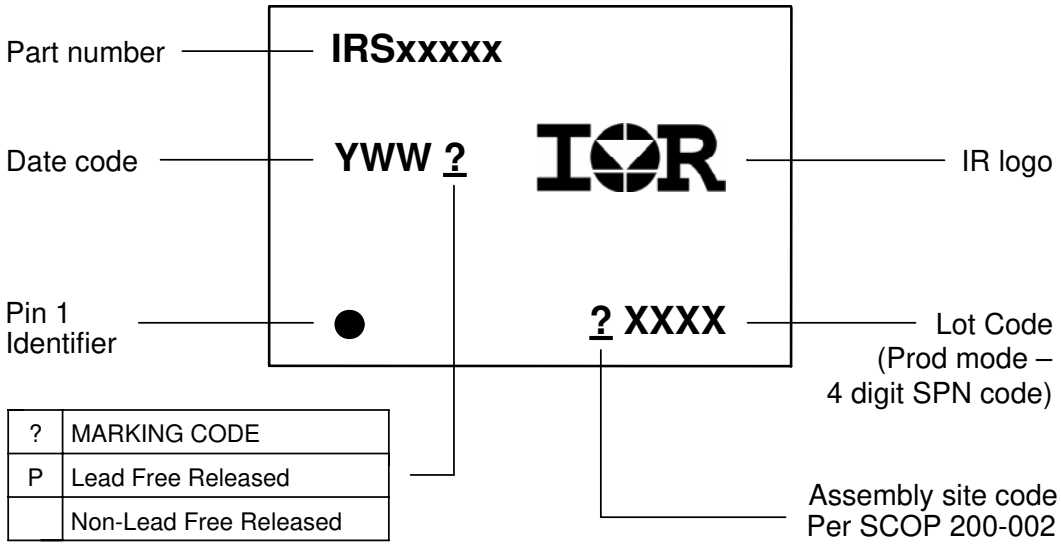

?	MARKING CODE
P	Lead Free Released
	Non-Lead Free Released

© 2008 International Rectifier

Ordering Information

Base Part Number	Package Type	Standard Pack		Complete Part Number
		Form	Quantity	
IRS21962	SOIC16N	Tube/Bulk	45	IRS21962SPBF
		Tape and Reel	2500	IRS21962STRPBF

The information provided in this document is believed to be accurate and reliable. However, International Rectifier assumes no responsibility for the consequences of the use of this information. International Rectifier assumes no responsibility for any infringement of patents or of other rights of third parties which may result from the use of this information. No license is granted by implication or otherwise under any patent or patent rights of International Rectifier. The specifications mentioned in this document are subject to change without notice. This document supersedes and replaces all information previously supplied.

For technical support, please contact IR's Technical Assistance Center
http://www.irf.com/technical-info/

WORLD HEADQUARTERS:
233 Kansas St., El Segundo, California 90245
Tel: (310) 252-7105

© 2008 International Rectifier