SUREWARE™
ULTRA RUGGED HARDWARE

JACK SCREW STANDOFF



JSO SERIES


JSO
Use With:
SEAX, SEAX8, LPAX, LSHM

JSO	–	BOARD STACKER	–	LEAD STYLE	–	PLATING OPTION
		Specify BOARD STACKER from chart		**–01** = Press-In (–0415, –0515, –0715, –0815 only) **–03** = Male Thread (–0815, –1015, –1115, –1615 only)		**–L** = Locking compound (Not available with –01 lead style, Required for –03 lead style)


SPECIFICATIONS

Material:
Stainless Steel
Locking Compound:
Nylon

BOARD STACKER	A	B	BOARD STACK HEIGHT
–0415	(4.15) .163	(2.50) .098	4 mm
–0515	(5.15) .203	(3.50) .138	5 mm
–0715	(7.15) .281	(5.50) .217	7 mm
–0815	(8.15) .321	(6.50) .256	8 mm
–1015	(10.15) .400	(8.50) .335	10 mm
–1115	(11.15) .439	(9.50) .374	11 mm
–1615	(16.15) .636	(14.50) .571	16 mm

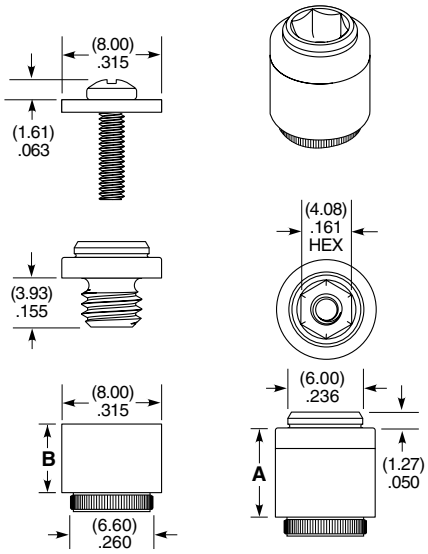

–01 LEAD STYLE

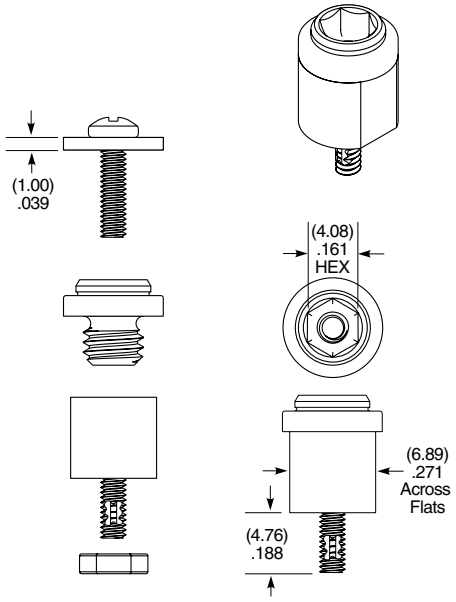

–03 LEAD STYLE

ALSO AVAILABLE
Contact Samtec

Other heights
Locking compound removed


Note:
Some sizes, styles and options are non-standard, non-returnable.

Components are to be packaged in separate bags unassembled.


APPLICATION


1


2


3


4

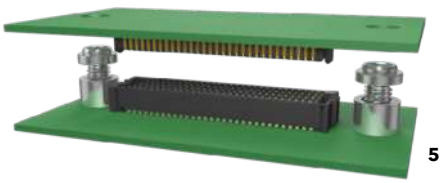
5

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.