
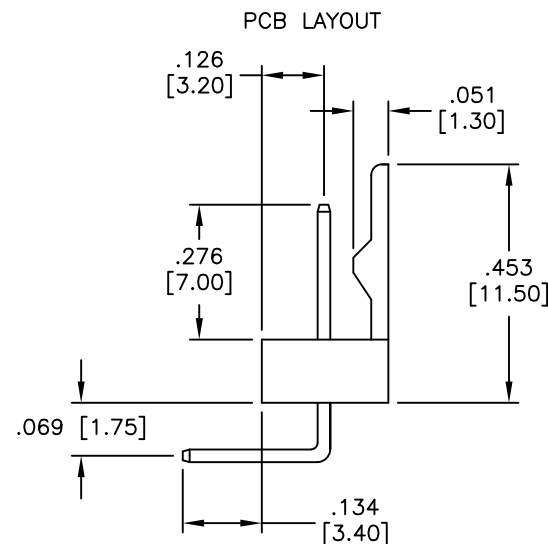
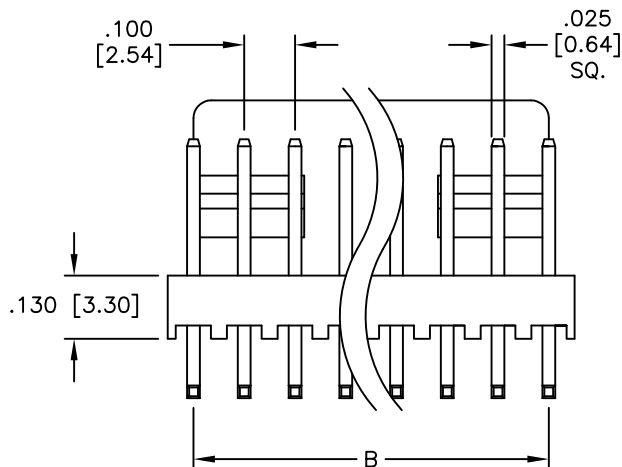
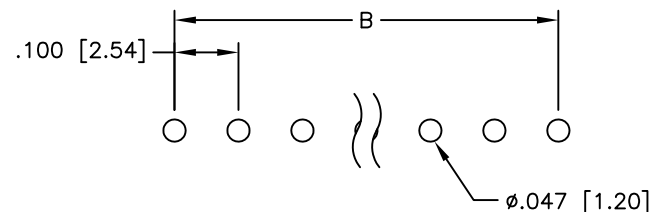


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description | Date   | Appr |
|-----|-------|-------------|--------|------|
| -   |       | RELEASED    | 4/8/05 |      |

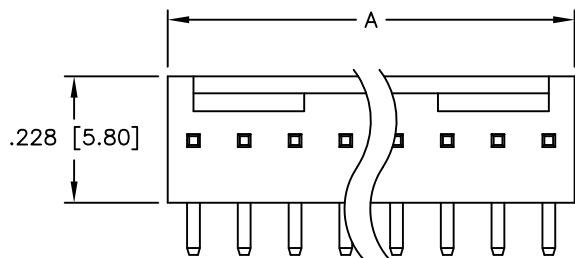

#### SPECIFICATIONS:

Material:  
 Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Contacts: Brass

Plating:  
 Tin over Copper underplate overall

Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 3 Amps max  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 20

A = .100 [2.54] x No. of Positions

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

| INCHES      | HOLES        |
|-------------|--------------|
| .X ± .10    | Ø.X ± .10    |
| .XX ± .020  | Ø.XX ± .015  |
| .XXX ± .015 | Ø.XXX ± .010 |

| APPROVALS |    | DATE   |
|-----------|----|--------|
| DRAWN     | SS | 4/8/05 |
| CHECKED   |    |        |
| APPROVED  |    |        |

## ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
 .100 [2.54] LOCKING HEADER  
 RIGHT ANGLE, PCB

| SIZE | PART NO.   | REV.         |
|------|------------|--------------|
| X    | LHA-XX-TRA | -            |
| REF: | S00123T    | SCALE: NTS   |
|      |            | SHEET 1 OF 1 |