IXYS


Advance Technical Information

PolarHV™ Power MOSFET

IXTA4N80P
IXTP4N80P


V_{DSS} = 800 V
I_{D25} = 3.6 A
$R_{DS(on)}$ ≤ 3.4 Ω

N-Channel Enhancement Mode
Avalanche Rated




Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	800	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 1 MΩ	800	V
V_{GSS}	Continuous	± 30	V
V_{GSM}	Transient	± 40	V
I_{D25}	T_C = 25°C	3.6	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	8	A
I_{AR}	T_C = 25°C	2	A
E_{AR}	T_C = 25°C	20	mJ
E_{AS}	T_C = 25°C	250	mJ
dv/dt	$I_S \le I_{DM}$, di/dt ≤ 100 A/μs, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$, R_G = 18 Ω	10	V/ns
P_D	T_C = 25°C	100	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6 mm (0.062 in.) from case for 10 s	300	°C
T_{SOLD}	Plastic body for 10 s	260	°C
M_d	Mounting torque (TO-220)	1.13/10	Nm/lb.in.
Weight	TO-220	4	g
	TO-263	3	g

TO-263 (IXTA)



TO-220 (IXTP)



G = Gate D = Drain
S = Source TAB = Drain

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0 V, I_D = 250 μA	800			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 100μA	3.0		5.5	V
I_{GSS}	V_{GS} = ±30 V, V_{DS} = 0 V			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0 V			5	μA
	T_J = 125°C			150	μA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5\ I_{D25}$, Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %			3.4	Ω

Features

- International standard packages
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
  - easy to drive and to protect

Advantages

- Easy to mount
- Space savings
- High power density

© 2006 IXYS CORPORATION All rights reserved

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) Min.	Typ.	Max.	
g_{fs}	V_{DS}= 10 V; I_D = 0.5 I_{D25}, pulse test	2.5	4.0		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		750		pF
C_{oss}			70		pF
C_{rss}			6.3		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 0.5 I_{D25} R_G = 18 Ω (External)		22		ns
t_r			24		ns
$t_{d(off)}$			60		ns
t_f			29		ns
$Q_{g(on)}$	V_{GS}= 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 0.5 I_{D25}		14.2		nC
Q_{gs}			4.8		nC
Q_{gd}			4.8		nC
R_{thJC}				1.25	°C/W
R_{thCS}	(TO-220)		0.25		°C/W


Source-Drain Diode

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) Min.	Typ.	Max.	
I_S	V_{GS} = 0 V			3.5	A
I_{SM}	Repetitive			8	A
V_{SD}	I_F = I_S, V_{GS} = 0 V			1.5	V
t_{rr}	I_F = 3.5 A, -di/dt = 100 A/μs, Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %		560		ns

ADVANCE TECHNICAL INFORMATION


The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

TO-263 (IXTA) Outline

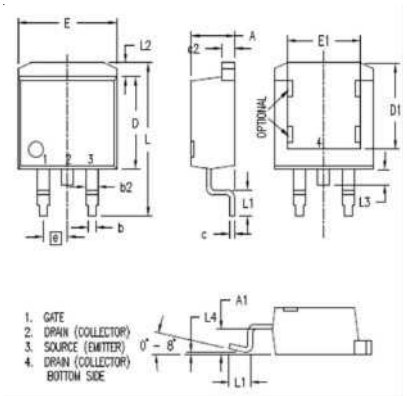

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.160	.190	4.06	4.83
A1	.080	.110	2.03	2.79
b	.020	.039	0.51	0.99
b2	.045	.055	1.14	1.40
c	.016	.029	0.40	0.74
c2	.045	.055	1.14	1.40
D	.340	.380	8.64	9.65
D1	.315	.350	8.00	8.89
E	.380	.410	9.65	10.41
E1	.245	.320	6.22	8.13
e	.100 BSC		2.54 BSC	
L	.575	.625	14.61	15.88
L1	.090	.110	2.29	2.79
L2	.040	.055	1.02	1.40
L3	.050	.070	1.27	1.78
L4	0	.005	0	0.13

TO-220 (IXTP) Outline

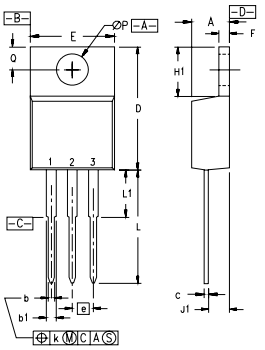

Pins: 1 - Gate 2 - Drain
3 - Source 4 - Drain

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.170	.190	4.32	4.83
b	.025	.040	0.64	1.02
b1	.045	.065	1.15	1.65
c	.014	.022	0.35	0.56
D	.580	.630	14.73	16.00
E	.390	.420	9.91	10.66
e	.100 BSC		2.54 BSC	
F	.045	.055	1.14	1.40
H1	.230	.270	5.85	6.85
J1	.090	.110	2.29	2.79
k	0	.015	0	0.38
L	.500	.550	12.70	13.97
L1	.110	.230	2.79	5.84
ØP	.139	.161	3.53	4.08
Q	.100	.125	2.54	3.18

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or moreof the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537

Fig. 1. Extended Output Characteristics @ 25ºC

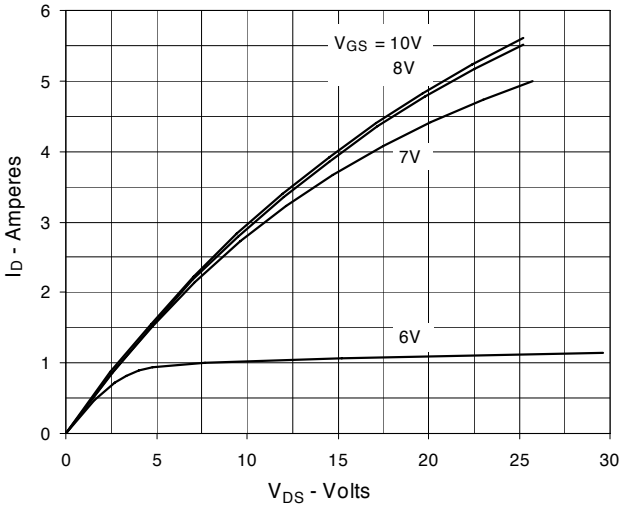


Fig. 2. Output Characteristics @ 125ºC

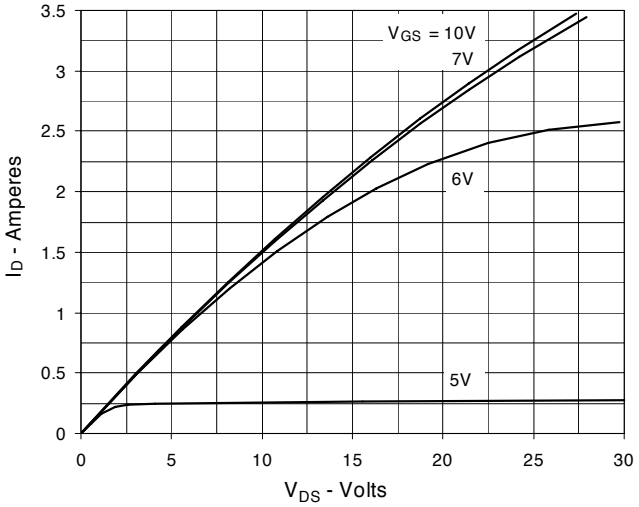


Fig. 3. $R_{DS(on)}$ Normalized to I_D = 2A Value vs. Junction Temperature

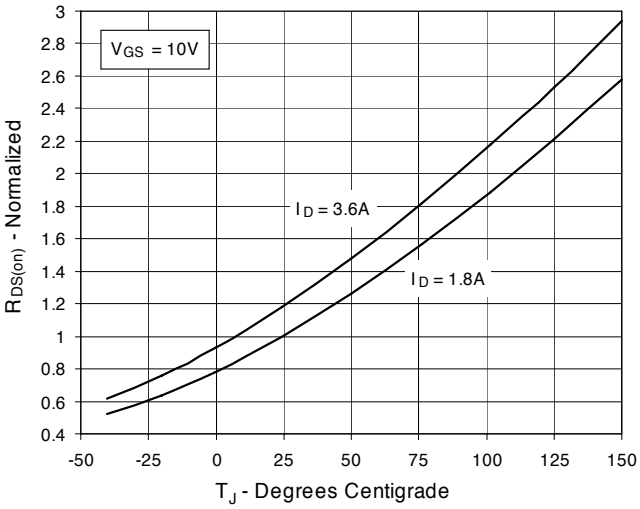


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 2A Value vs. Drain Current

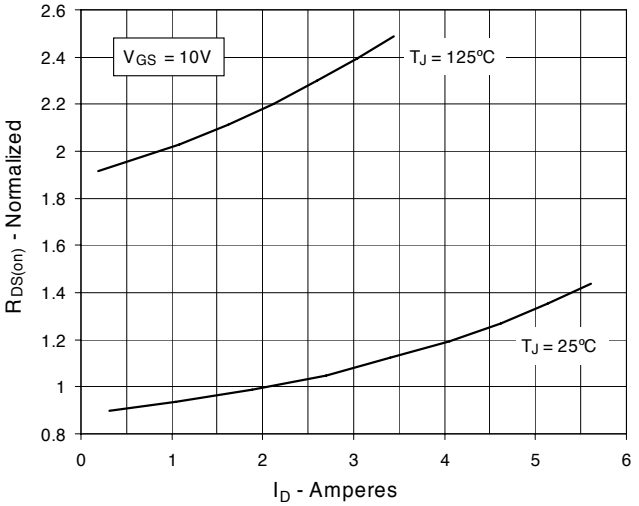


Fig. 5. Maximum Drain Current vs. Case Temperature


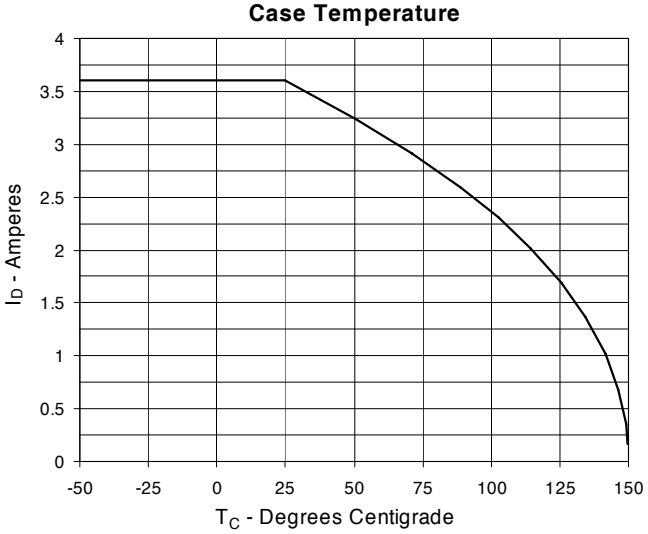


Fig. 6. Input Admittance

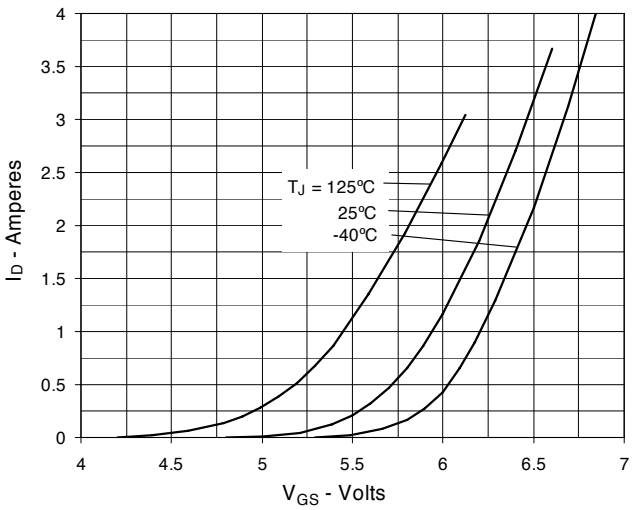

© 2006 IXYS CORPORATION All rights reserved

Fig. 7. Transconductance

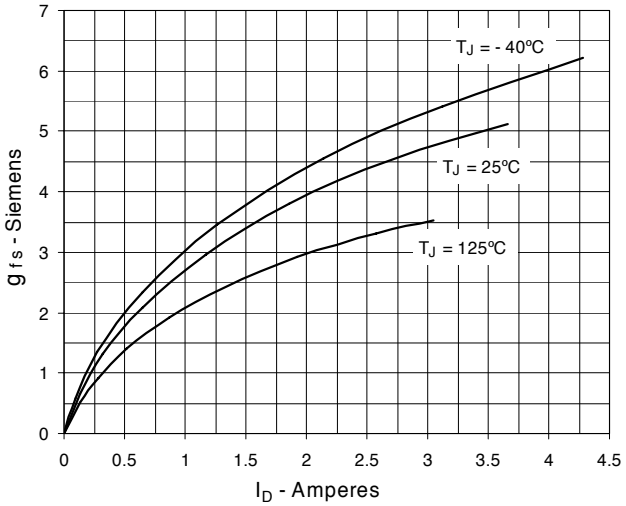


Fig. 8. Forward Voltage Drop of Intrinsic Diode

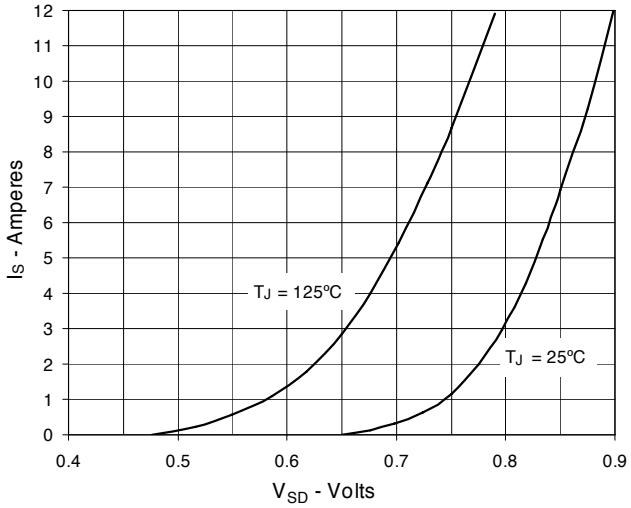


Fig. 9. Gate Charge

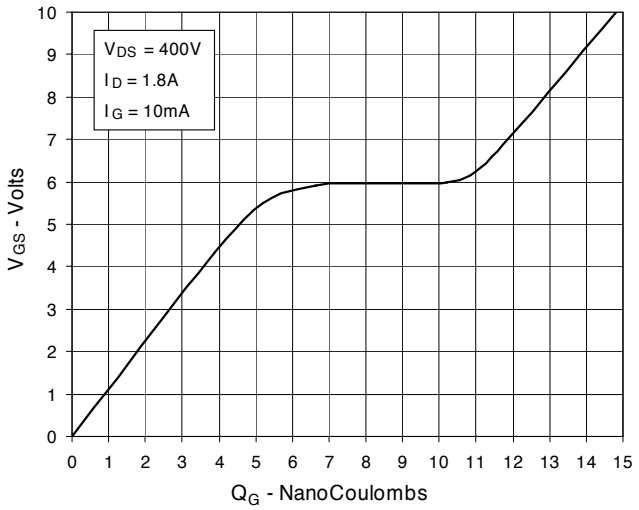


Fig. 10. Capacitance


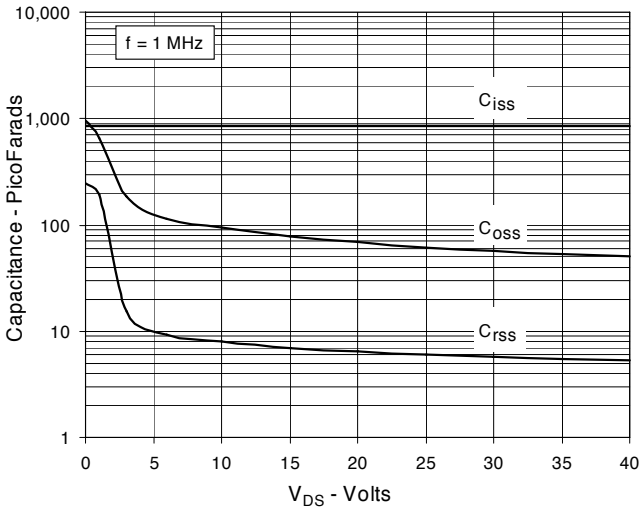


Fig. 11. Maximum Transient Thermal Impedance



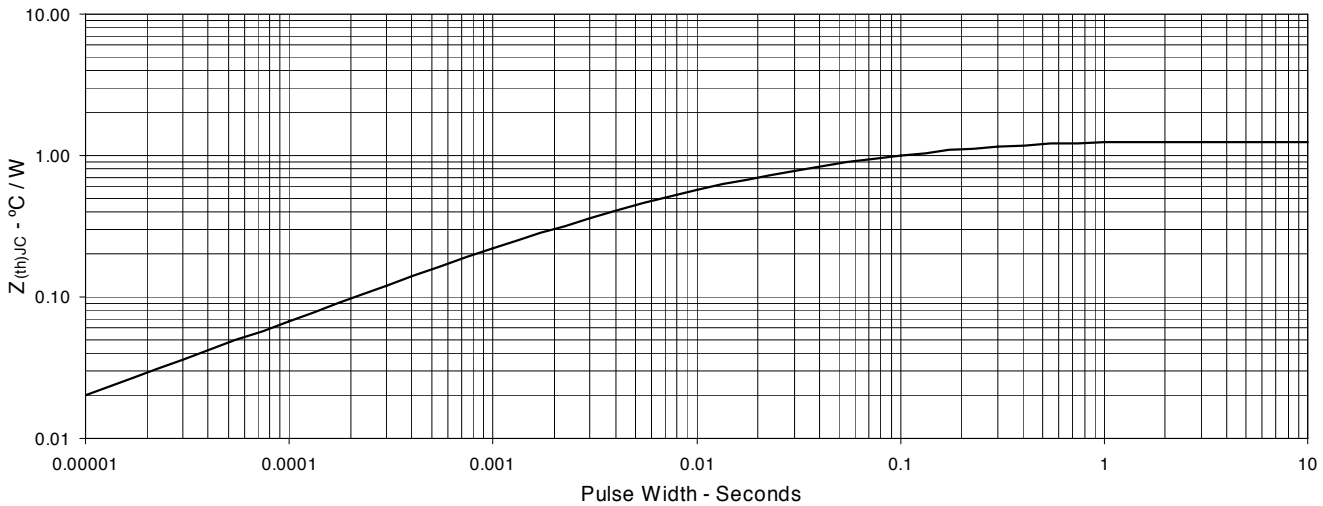

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.