
Littelfuse
Expertise Applied | Answers Delivered


Schottky Barrier Rectifier
MBR10200CT 2x 5A, 200V, TO-220AB Common Cathode

MBR10200CT

RoHS

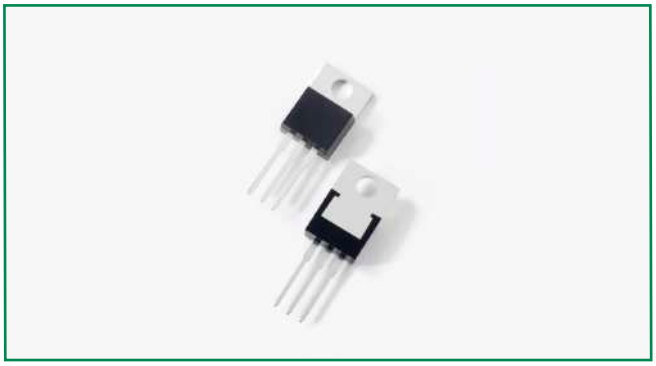

Pin out



Description

Littelfuse MBR series Schottky Barrier Rectifier is designed to meet the general requirements of commercial applications by providing high temperature, low leakage and low V_F products.
It is suitable for high frequency switching mode power supply, free-wheeling diodes and polarity protection diodes.

Features

- High junction temperature capability
- Guard ring for enhanced ruggedness and long term reliability
- Low forward voltage drop
- High frequency operation
- Common cathode configuration in TO-220AB package

Applications

- Switching mode power supply
- Free-wheeling diodes
- DC/DC converters
- Polarity protection diodes

Maximum Ratings

Parameters	Symbol	Test Conditions	Max	Unit
Peak Inverse Voltage	V_{RWM}	-	200	V
Average Forward Current	$I_{F(AV)}$	50% duty cycle @T_C =105°C rectangular wave form	5 (Per leg)	A
			10 (Per device)	
Peak One Cycle Non-Repetitive Surge Current (per leg)	I_{FSM}	8.3 ms, half Sine pulse	128	A

Electrical Characteristics

Parameters	Symbol	Test Conditions	Max	Unit
Forward Voltage Drop (per leg) *	V_{F1}	@5A, Pulse, T_J = 25 °C	0.98	V
	V_{F2}	@5A, Pulse, T_J = 125 °C	0.78	
Reverse Current (per leg) *	I_{R1}	@V_R = rated V_R T_J = 25 °C	1.0	mA
	I_{R2}	@V_R = rated V_R T_J = 125 °C	7.0	
Junction Capacitance (per leg)	C_T	@V_R = 5V, T_C = 25 °C f_{SIG} = 1MHz	150	pF
Series Inductance (per leg)	L_S	Measured lead to lead 5 mm from package body	8.0	nH
Voltage Rate of Change	dv/dt		10,000	V/µs

* Pulse Width < 300µs, Duty Cycle <2%

©2015 Littelfuse, Inc
Specifications are subject to change without notice.
Revised:01/19/16

Schottky Barrier Rectifier
MBR10200CT 2x 5A, 200V, TO-220AB Common Cathode

Thermal-Mechanical Specifications

Parameters	Symbol	Test Conditions	Max	Unit
Junction Temperature Range	T_J		-55 to +150	°C
Storage Temperature Range	T_{stg}		-55 to +150	°C
Maximum Thermal Resistance Junction to Case	R_{thJC}	DC operation	3.5 (Per leg) 1.75 (Per device)	°C/W
Maximum Thermal Resistance, Case to Heat Sink	R_{thCS}	Mounting surface, smooth and greased(only for TO-220)	0.5	°C/W
Approximate Weight	wt		2	g
Case Style	TO-220AB			

Figure 1: Typical Forward Characteristics

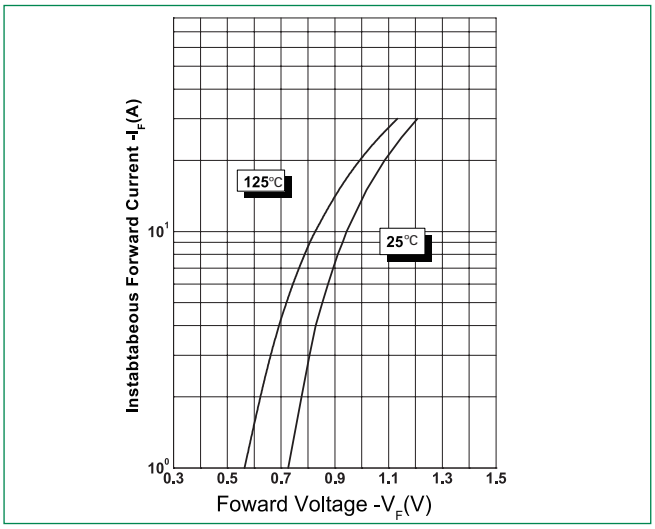


Figure 2: Typical Reverse Characteristics


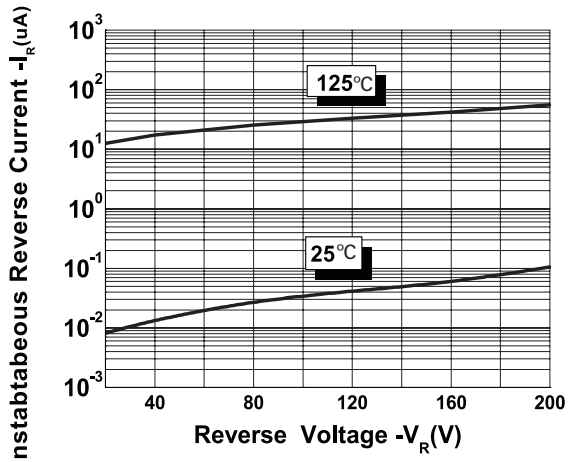


Figure 3: Typical Junction Capacitance

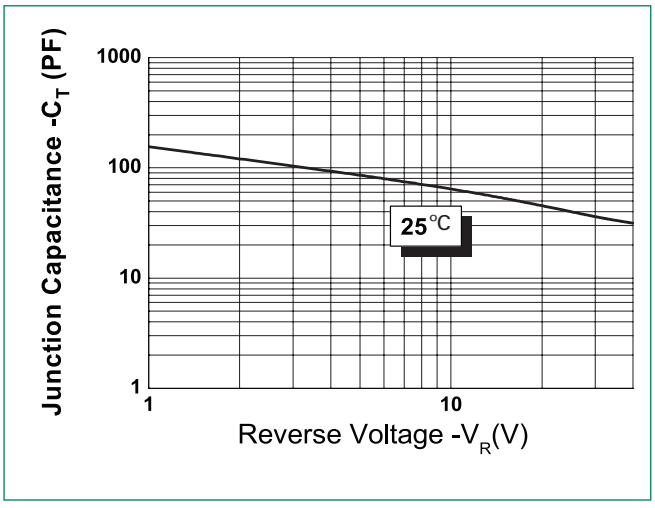


©2015 Littelfuse, Inc
Specifications are subject to change without notice.
Revised:01/19/16

Littelfuse
Expertise Applied | Answers Delivered

Schottky Barrier Rectifier
MBR10200CT 2x 5A, 200V, TO-220AB Common Cathode

Dimensions- TO-220AB

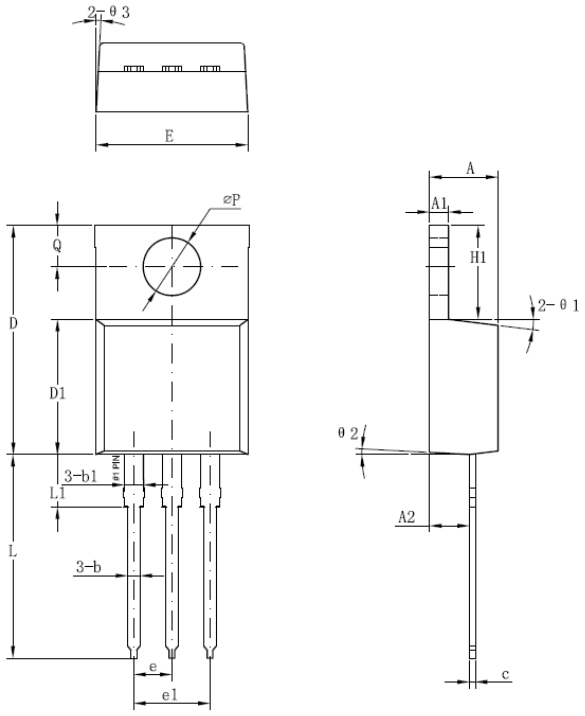


Symbol	Millimeters	
	Min	Max
A	3.56	4.83
A1	0.51	1.40
A2	2.03	2.92
b	0.38	1.02
b1	1.14	1.78
c	0.31*	0.61
D	14.22	16.51
D1	8.38	9.15*
E	9.65	10.67
e	2.54	-
e1	4.98*	-
H1	5.84	6.86
L	12.70	14.73
L1	-	6.35
øP	3.53	4.09
Q	2.54	3.43

Footnote *: The spec. does not comply with JEDEC spec.


Packing Options

Part Number	Marking	Packing Mode	M.O.Q
MBR10200CT	MBR10200CT	50pcs / Tube	1000

Tube Specification



Part Numbering and Marking System

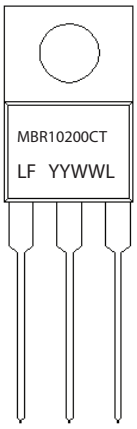

MBR = Device Type
10 = Forward Current (10A)
200 = Reverse Voltage (200V)
CT = Configuration
LF = Littelfuse
YY = Year
WW = Week
L = Lot Number

©2015 Littelfuse, Inc
Specifications are subject to change without notice.
Revised:01/19/16