
Littelfuse
Expertise Applied | Answers Delivered

Teccor® brand Thyristors
16 Amp Standard SCR

SRR6016xx Series

RoHS

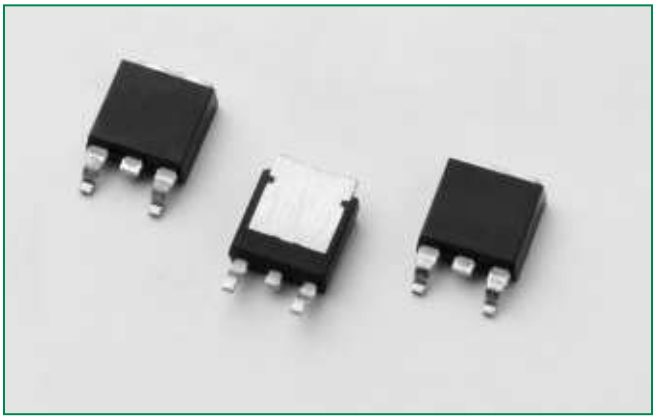

Main Features

Symbol	Value	Unit
$I_{T(RMS)}$	16	A
V_{DRM}/V_{RRM}	600	V
I_{GT}	6	mA

Description

Excellent unidirectional switches for phase control and general switching applications such as heating, motor control controls, converters / rectifiers and capacitive discharge ignitions.

Standard phase control SCRs are triggered with few milliamperes of current at less than 1.5V potential.


Features & Benefits

- RoHS compliant
- Glass – passivated junctions
- Voltage capability up to 600 V
- Surge capability up to 160 A

Applications

Typical applications includes capacitive discharge system for motorcycle engine CDI, portable generator engine ignition, strobe lights and nailers, as well as generic rectifiers, battery voltage regulators and converters. Also controls for power tools, home/brown good and white goods appliances.

Schematic Symbol

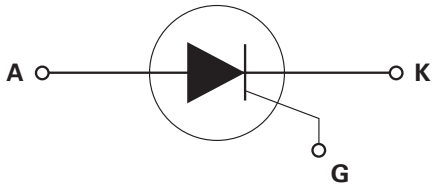

Absolute Maximum Ratings — Standard SCRs

Symbol	Parameter	Test Conditions	SRR6016x1	Unit
$I_{T(RMS)}$	RMS on-state current	T_C = 100°C	16	A
$I_{T(AV)}$	Average on-state current	T_C = 100°C	10.24	A
I_{TSM}	Peak non-repetitive surge current	single half cycle; f = 50Hz; T_J (initial) = 25°C	132	A
		single half cycle; f = 60Hz; T_J (initial) = 25°C	160	
I^2t	I^2t Value for fusing	t_p = 8.3 ms	107	A^2s
di/dt	Critical rate-of-rise of on-state current	f = 60 Hz T_J = 125°C	100	A/µs
I_{GM}	Peak gate current	T_J = 125°C	2	A
$P_{G(AV)}$	Average gate power dissipation	T_J = 125°C	0.5	W
T_{stg}	Storage temperature range		-40 to 150	°C
T_J	Operating junction temperature range		-40 to 125	°C

©2016 Littelfuse, Inc
Specifications are subject to change without notice.

Revised: 06/29/16

Electrical Characteristics (T_J = 25°C, unless otherwise specified) – Standard SCRs

Symbol	Test Conditions		SRR6016x1	Unit
I_{GT}	V_D = 12V R_L = 60 Ω	MIN.	1.5	mA
		MAX.	6	mA
V_{GT}	V_D = 12V R_L = 60 Ω	MAX.	1.5	V
dv/dt	$V_D = V_{DRM}$; gate open; T_J = 100°C	MIN.	300	V/µs
	$V_D = V_{DRM}$; gate open; T_J = 125°C		225	
V_{GD}	$V_D = V_{DRM}$; R_L = 3.3 kΩ; T_J = 125°C	MIN.	0.2	V
I_H	I_T = 200mA (initial)	MAX.	40	mA
t_q	(1)	MAX.	35	µs
t_{gt}	I_G = 2 x I_{GT}; PW = 15µs; I_T = 20A	TYP.	2	µs

NOTE: (1) I_T=2A; t_p=50µs; dv/dt=5V/µs; di/dt=-30A/µs

Static Characteristics

Symbol	Test Conditions			Value	Unit
V_{TM}	I_T = 32A; t_p = 380 µs		MAX.	1.8	V
I_{DRM} / I_{RRM}	V_{DRM} / V_{RRM}	T_J = 25°C	MAX.	10	µA
		T_J = 110°C		500	
		T_J = 125°C		1000	

Thermal Resistances

Symbol	Parameter	Value	Unit
$R_{\theta(J-C)}$	Junction to case (AC)	1.50	°C/W

Figure 1: Normalized DC Gate Trigger Current vs. Junction Temperature


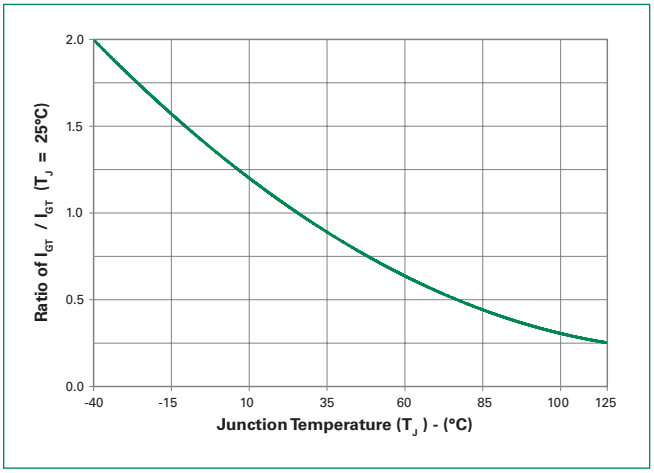


Figure 2: Normalized DC Gate Trigger Voltage vs. Junction Temperature

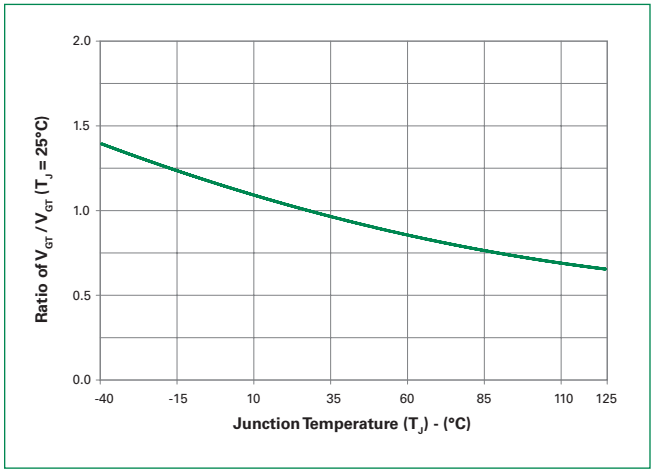

©2016 Littelfuse, Inc
Specifications are subject to change without notice.

Revised: 06/29/16

Figure 3: Normalized DC Holding Current vs. Junction Temperature

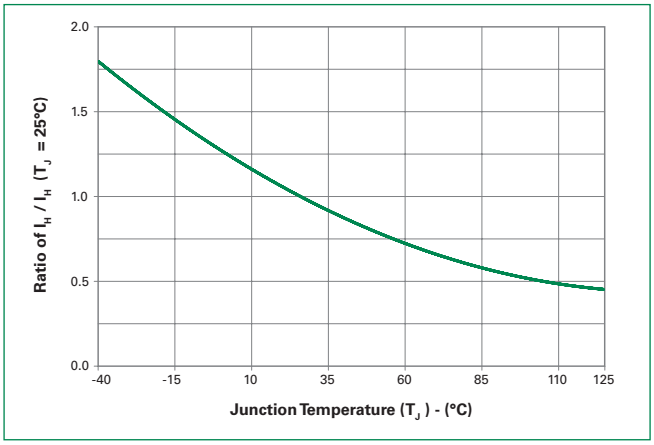


Figure 4: On-State Current vs. On-State Voltage (Typical)

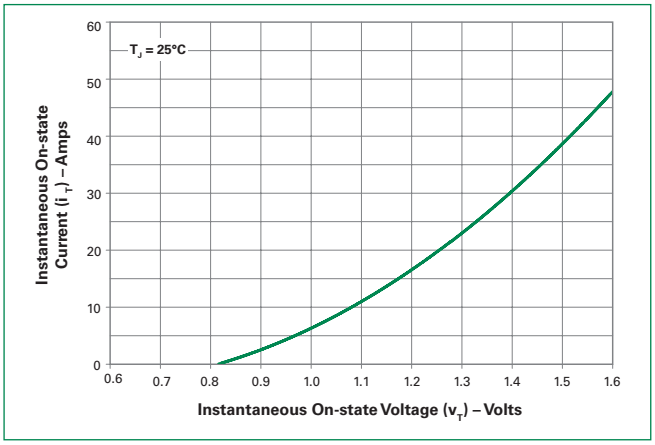


Figure 5: Power Dissipation (Typical) vs. RMS On-State Current

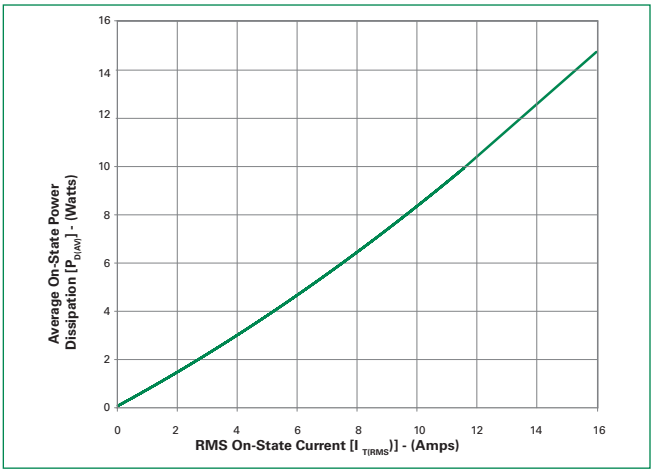


Figure 6: Maximum Allowable Case Temperature vs. RMS On-State Current

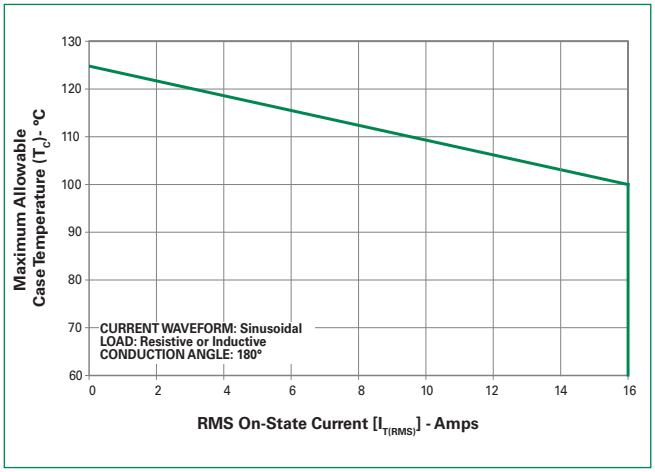


Figure 7: Maximum Allowable Case Temperature vs. Average On-State Current


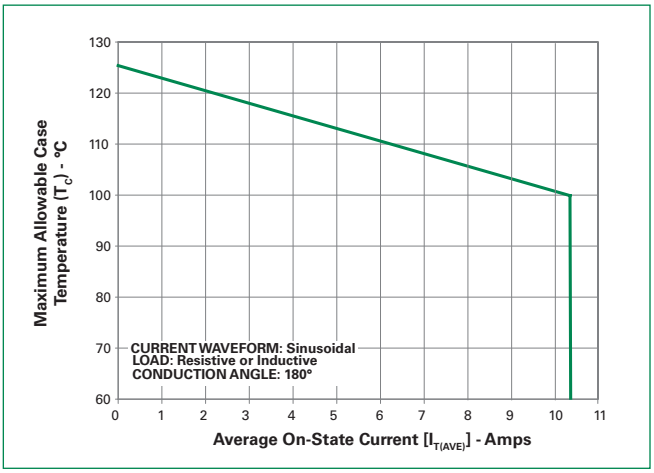


Figure 8: Peak Capacitor Discharge Current

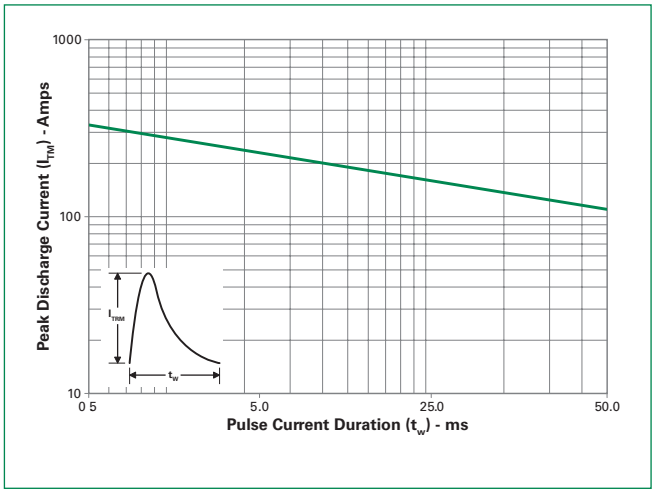

©2016 Littelfuse, Inc
Specifications are subject to change without notice.

Revised: 06/29/16

Figure 9: Peak Capacitor Discharge Current Derating


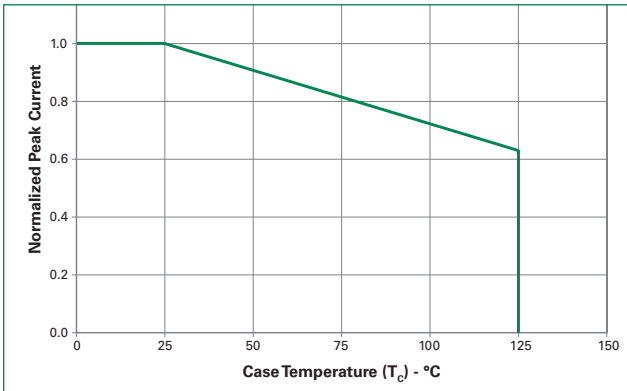


Figure 10: Surge Peak On-State Current vs. Number of Cycles

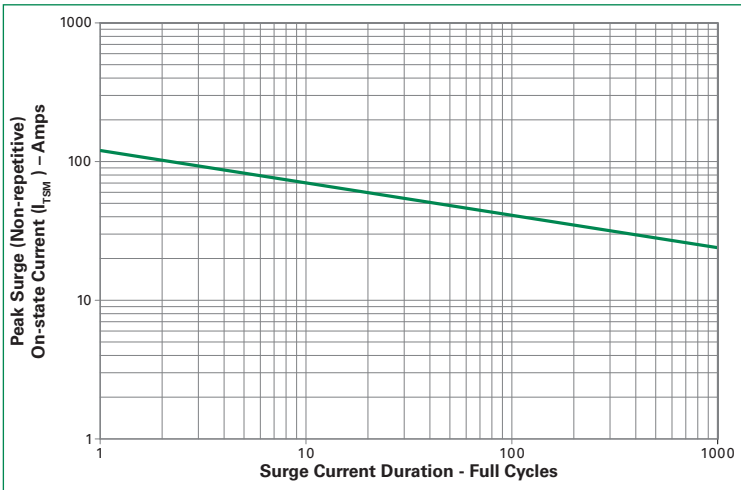

SUPPLY FREQUENCY: 60 Hz Sinusoidal
LOAD: Resistive
RMS On-State Current: [$I_{T(RMS)}$]: Maximum Rated Value at Specified Case Temperature


Notes:
1. Gate control may be lost during and immediately following surge current interval.
2. Overload may not be repeated until junction temperature has returned to steady-state rated value.

©2016 Littelfuse, Inc
Specifications are subject to change without notice.

Revised: 06/29/16

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	150°C
	-Temperature Max ($T_{s(max)}$)	200°C
	-Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp) (T_L) to peak		5°C/second max
$T_{S(max)}$ to T_L - Ramp-up Rate		5°C/second max
Reflow	-Temperature (T_L) (Liquidus)	217°C
	-Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_P)		$260^{+0/-5}$ °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max.
Do not exceed		280°C

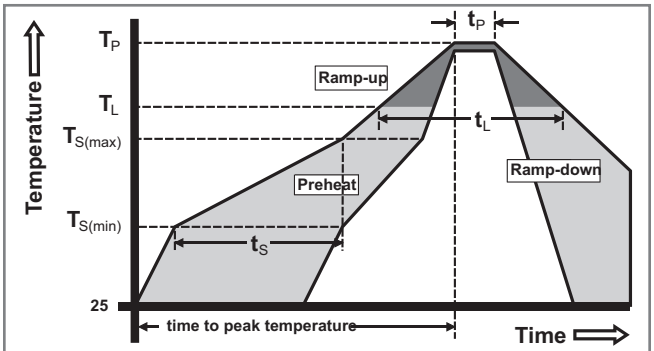

Physical Specifications

Terminal Finish	100% Matte Tin-plated
Body Material	UL recognized epoxy meeting flammability classification V-0
Lead Material	Copper Alloy

Environmental Specifications

Test	Specifications and Conditions
AC Blocking	MIL-STD-750, M-1040, Cond A Applied Peak AC voltage @ 125°C for 1008 hours
Temperature Cycling	MIL-STD-750, M-1051, 100 cycles; -40°C to +150°C; 15-min dwell-time
Temperature/ Humidity	EIA / JEDEC, JESD22-A101 1008 hours; 320V - DC: 85°C; 85% rel humidity
High Temp Storage	MIL-STD-750, M-1031, 1008 hours; 150°C
Low-Temp Storage	1008 hours; -40°C
Resistance to Solder Heat	MIL-STD-750 Method 2031
Solderability	ANSI/J-STD-002, category 3, Test A
Lead Bend	MIL-STD-750, M-2036 Cond E

Design Considerations


Careful selection of the correct device for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Good design practice should limit the maximum continuous current through the main terminals to 75% of the device rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including dv/dt), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

©2016 Littelfuse, Inc
Specifications are subject to change without notice.

Revised: 06/29/16

Teccor® brand Thyristors
16 Amp Standard SCR

Dimensions — TO-252AA (D-Package) — D-PAK Surface Mount

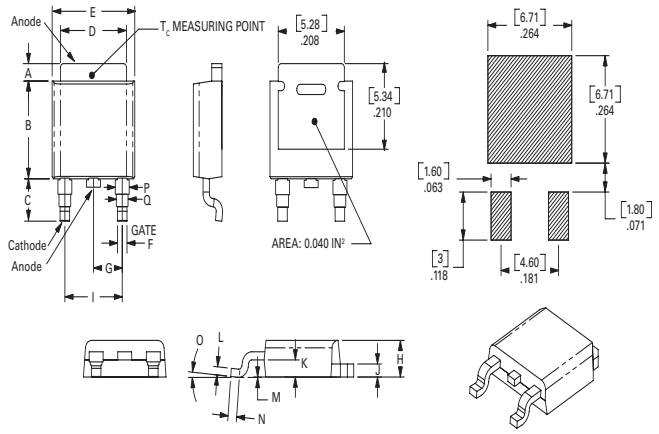

Dimension	Inches			Millimeters		
	Min	Typ	Max	Min	Typ	Max
A	0.040	0.043	0.050	1.02	1.09	1.27
B	0.235	0.243	0.245	5.97	6.16	6.22
C	0.106	0.108	0.113	2.69	2.74	2.87
D	0.205	0.208	0.213	5.21	5.29	5.41
E	0.255	0.262	0.265	6.48	6.65	6.73
F	0.027	0.031	0.033	0.69	0.80	0.84
G	0.087	0.090	0.093	2.21	2.28	2.36
H	0.085	0.092	0.095	2.16	2.33	2.41
I	0.176	0.179	0.184	4.47	4.55	4.67
J	0.018	0.020	0.023	0.46	0.51	0.58
K	0.038	0.040	0.044	0.97	1.02	1.12
L	0.018	0.020	0.023	0.46	0.51	0.58
M	0.000	0.000	0.004	0.00	0.00	0.10
N	0.021	0.026	0.027	0.53	0.67	0.69
O	0°	0°	5°	0°	0°	5°
P	0.042	0.047	0.052	1.06	1.20	1.32
Q	0.034	0.039	0.044	0.86	1.00	1.11

Packing Options

Part Number	Marking	Weight	Packing Mode	Base Quantity
SRR6016D1TP	SRR6016D1	0.3 g	Tube	750 (75 per tube)
SRR6016D1RP	SRR6016D1	0.3 g	Embossed Carrier	2500

Part Numbering System

SRR 60 16 D 1 RP

DEVICE TYPE
SRR: SCR

VOLTAGE RATING
60 : 600V


CURRENT
16: 16A

PACKAGE TYPE
D : TO-252 (DPAK)

SENSITIVE TYPE
1: 6mA

PACKAGING OPTIONS
RP: Reel Pack
TP: Tube Pack

Part Marking System




Date Code Marking
Y:Year Code
M: Month Code
L: Location Code
DD: Calendar Code

©2016 Littelfuse, Inc
Specifications are subject to change without notice.

Revised: 06/29/16

TO-252 Embossed Carrier Reel Pack (RP) Specifications

Meets all EIA-481-2 Standards

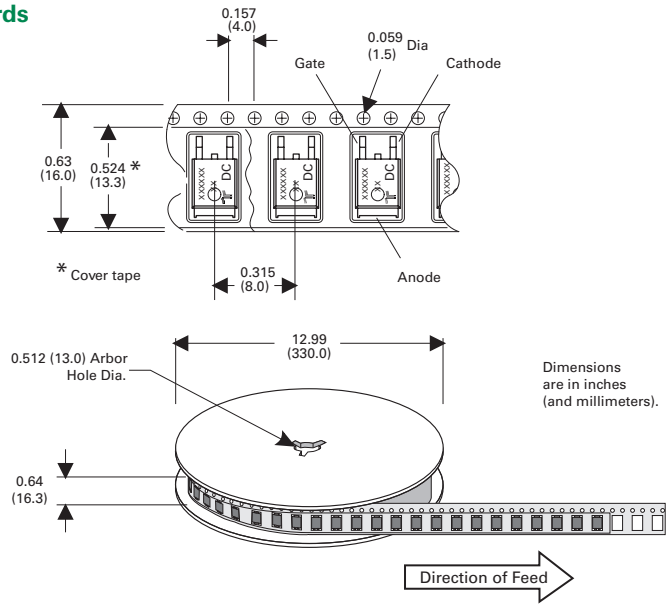

©2016 Littelfuse, Inc
Specifications are subject to change without notice.

Revised: 06/29/16