LM3407 350-mA, Constant Current Output Floating Buck Switching Converter for High-Power LEDs

1 Features

- Input Operating Range 4.5 V to 30 V
- Output Voltage Range: 0.1 V_{IN} to 0.9 V_{IN}
- Accurate Constant Current Output
- Independent Device Enable (CMOS Compatible) and PWM Dimming Control
- Converter Switching Frequency Adjustable From 300 kHz to 1 MHz
- No External Control Loop Compensation Required
- Supports Ceramic and Low ESR Output Capacitors
- Input Undervoltage Lockout (UVLO)
- Thermal Shutdown Protection
- MSOP-8 PowerPAD Package

2 Applications

- LED Drivers
- Constant Current Sources
- Automotive Lighting
- General Illumination
- Industrial Lighting

3 Description


The LM3407 device is a constant current output floating buck switching converter designed to provide constant current to high-power LEDs. The device is ideal for automotive, industrial, and general lighting applications. The LM3407 has an integrated power N-channel MOSFET that makes the application solution compact and simple to implement. An external 1% thick-film resistor allows the converter output voltage to adjust as needed to deliver constant current within 10% accuracy to a serially connected LED string of varying number and type. Converter switching frequency is adjustable from 300 kHz to 1 MHz. The LM3407 features a dimming input to enable LED brightness control by Pulse Width Modulation (PWM). Additionally, a separate enable pin allows for low-power shutdown. An exposed pad MSOP-8 package provides excellent heat dissipation and thermal performance. Input UVLO and output open-circuit protection ensure a robust LED driver solution.

Device Information[1]

PART NUMBER	PACKAGE	BODY SIZE (NOM)
LM3407	MSOP-PowerPAD (8)	3.00 mm × 3.00 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Simplified Application Schematic

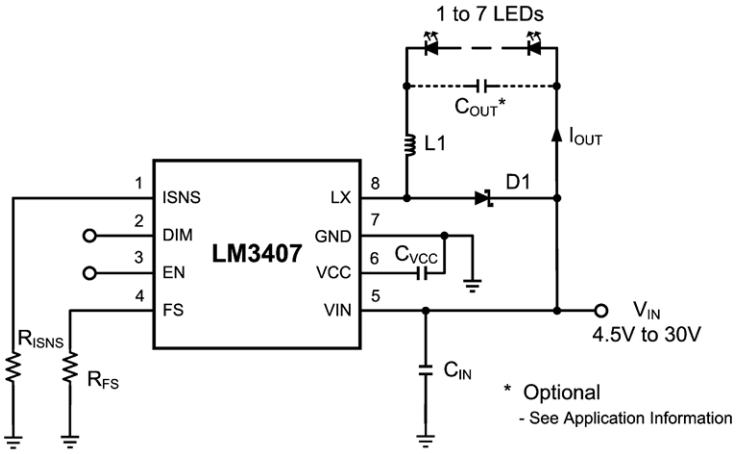

Copyright © 2016, Texas Instruments Incorporated

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features ... 1
2 Applications ... 1
3 Description ... 1
4 Revision History ... 2
5 Pin Configuration and Functions ... 3
6 Specifications ... 4
6.1 Absolute Maximum Ratings ... 4
6.2 ESD Ratings ... 4
6.3 Recommended Operating Conditions ... 4
6.4 Thermal Information ... 4
6.5 Electrical Characteristics ... 5
6.6 Typical Characteristics ... 6
7 Detailed Description ... 9
7.1 Overview ... 9
7.2 Functional Block Diagram ... 9
7.3 Feature Description ... 10
7.4 Device Functional Modes ... 13
8 Application and Implementation ... 14
8.1 Application Information ... 14
8.2 Typical Applications ... 17
9 Power Supply Recommendations ... 20
10 Layout ... 20
10.1 Layout Guidelines ... 20
10.2 Layout Example ... 20
11 Device and Documentation Support ... 21
11.1 Documentation Support ... 21
11.2 Receiving Notification of Documentation Updates 21
11.3 Community Resources ... 21
11.4 Trademarks ... 21
11.5 Electrostatic Discharge Caution ... 21
11.6 Glossary ... 21
12 Mechanical, Packaging, and Orderable Information ... 21

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision B (May 2013) to Revision C **Page**

- Added *ESD Ratings* table, *Thermal Information* table, *Feature Description* section, *Device Functional Modes*, *Application and Implementation* section, *Power Supply Recommendations* section, *Layout* section, *Device and Documentation Support* section, and *Mechanical, Packaging, and Orderable Information* section ... 1
- Changed $R_{\theta JA}$ for DGN package from 50°C/W to 55.6°C/W ... 4


Changes from Revision A (January 2009) to Revision B **Page**

- Changed layout of National Semiconductor Data Sheet to TI format. ... 20

Copyright © 2008–2016, Texas Instruments Incorporated

5 Pin Configuration and Functions

DGN Package
8-Pin MSOP
Top View

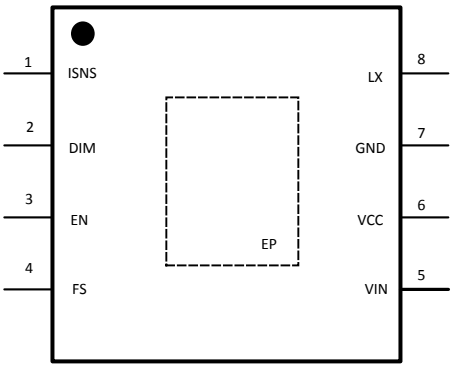

Pin Functions

PIN		I/O	DESCRIPTION
NO.	NAME		
1	ISNS	I	Connect resistor R_{ISNS} from this pin to ground for LED current sensing. The current sensing resistor should be placed close to this pin.
2	DIM	I	PWM Dimming Control Pin. Applying a logic level PWM signal to this pin controls the intended brightness of the LED string.
3	EN	I	Applying logic high to this pin or leaving it open enables the switcher. When pulled low the switcher is disabled and will enter low power shutdown mode.
4	FS	I	Switching Frequency Setting Pin. Connect resistor R_{FS} from this pin to ground to set the switching frequency.
5	VIN	I	Input Voltage Pin. The input voltage should be in the range of 4.5 V to 30 V
6	VCC	O	Internal Regulator Output Pin. This pin should be bypassed to ground by a ceramic capacitor with a minimum value of 1 µF.
7	GND	—	This pin should be connected to the system ground.
8	LX	O	Drain of N-MOSFET Switch. Connect this pin to the output inductor and anode of the Schottky diode.
EP	EP	—	Thermal Pad (Power Ground). Used to dissipate heat from the package during operation. Must be electrically connected to GND external to the package.

Copyright © 2008–2016, Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

	MIN	MAX	UNIT
VIN to GND	–0.3	36	V
VIN to GND (transient)		42 (500 ms)	V
LX to GND	–0.3	36	V
LX to GND (transient)	–3 (2 ns)	42 (500 ms)	V
FS, ISNS, DIM, EN to GND	–0.3	7	V
Storage temperature, T_{stg}	–65	125	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	±2000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101(2)	±750	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
V_{IN}	4.5	30	V
Junction temperature	–40	125	°C

6.4 Thermal Information

THERMAL METRIC(1)		LM3407 DGN (MSOP) 8 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	55.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	50.7	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	28.8	°C/W
ψ_{JT}	Junction-to-top characterization parameter	1.6	°C/W
ψ_{JB}	Junction-to-board characterization parameter	28.6	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	4.9	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

Copyright © 2008–2016, Texas Instruments Incorporated

6.5 Electrical Characteristics

MIN and MAX limits apply for T_J = –40°C to +125°C unless specified otherwise. V_{IN} = 12 V unless otherwise indicated.


PARAMETER		TEST CONDITIONS	MIN(1)	TYP(2)	MAX(1)	UNIT
SYSTEM PARAMETERS						
I_{IN}	Operating input current	4.5 V ≤ V_{IN} ≤ 30 V, LX = open, V_{PWM} = V_{EN} = 5 V	0.58	0.78	0.98	mA
I_Q	Quiescent Input current	4.5 V ≤ V_{IN} ≤ 30 V, V_{PWM} = 0 V, V_{EN} = 5 V	0.2	0.27	0.39	mA
I_{SHUT}	Shutdown input current	V_{EN} = 0 V	36	48	60	µA
V_{UVLO}	Input undervoltage lockout threshold	V_{IN} Rising		3.6	4.5	V
$V_{UVLO-HYS}$	UVLO hysteresis	V_{IN} Falling		200		mV
V_{EN_H}	EN Pin HIGH threshold	V_{EN} Rising		1.9	2.4	V
V_{EN_L}	EN Pin LOW threshold	V_{EN} Falling	1.3	1.75		V
V_{DIM_H}	DIM Pin HIGH threshold	V_{DIM} Rising		1.9	2.4	V
V_{DIM_L}	DIM Pin LOW threshold	V_{DIM} Falling	1.3	1.75		V
f_{SW}	Switching frequency	R_T = 80 kΩ		500		kHz
		R_T = 40 kΩ		1000		
t_{ON-MIN}	Minimum on-time			200		ns
T_{SD}	Thermal shutdown threshold			165		°C
T_{SD-HYS}	Thermal shutdown hysteresis			25		
INTERNAL VOLTAGE REGULATOR						
V_{CC}	V_{CC} regulator output voltage(3)	V_{IN} = 12 V		4.5		V
MAIN SWITCH						
$R_{DS(ON)}$	Main switch ON resistance	I_{SINK} = 80 mA		0.77	1.45	Ω
CONTROL LOOP						
A_{EA}	Error amp open loop gain			60		dB

(1) All limits specified at room temperature (TYP) and at temperature extremes (MIN/MAX). All room temperature limits are 100% production tested. All limits at temperature extremes are specified through correlation using standard Statistical Quality Control (SQC) methods. All limits are used to calculate Average Outgoing Quality Level (AOQL).
(2) Typical specification represent the most likely parametric norm at 25°C operation.
(3) V_{CC} provides self bias for the internal gate drive and control circuits. Device thermal limitations limit external loading to the pin.

Copyright © 2008–2016, Texas Instruments Incorporated


6.6 Typical Characteristics

All curves taken at V_{IN} = 12 V with configuration in typical application for driving two power LEDs with I_{LED} = 0.35 A shown in this data sheet and T_A = 25°C, unless otherwise specified.

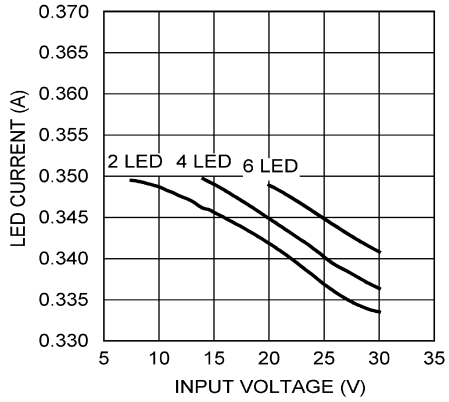


T_A = -40°C

Figure 1. Output Current vs Input Voltage

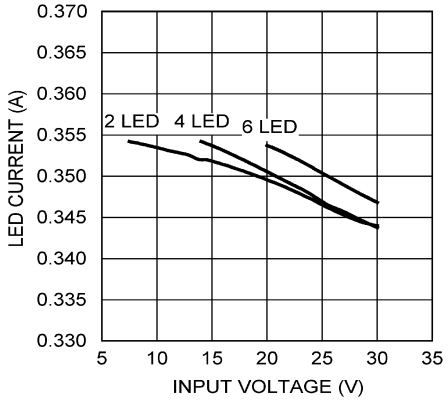


T_A = 25°C

Figure 2. Output Current vs Input Voltage

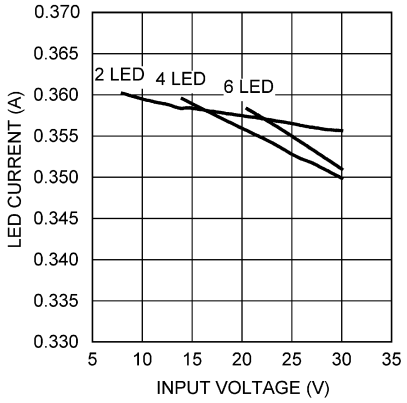


T_A = 125°C

Figure 3. Output Current vs Input Voltage

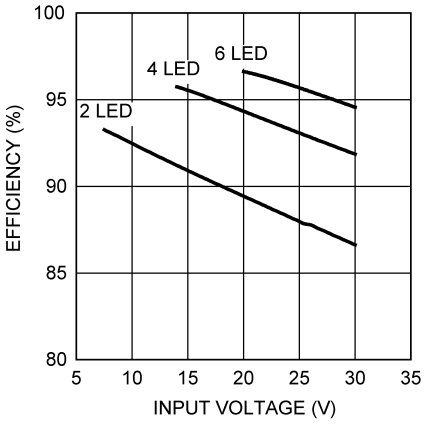


T_A = -40°C

Figure 4. Efficiency vs Input Voltage

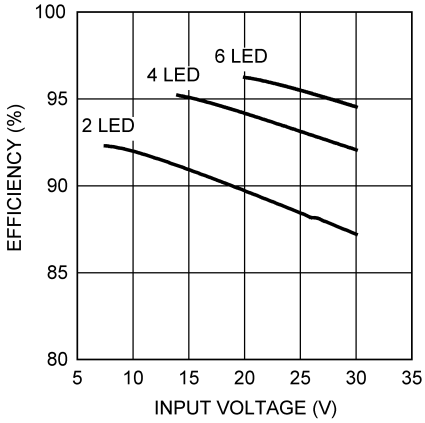

T_A = 25°C

Figure 5. Efficiency vs Input Voltage

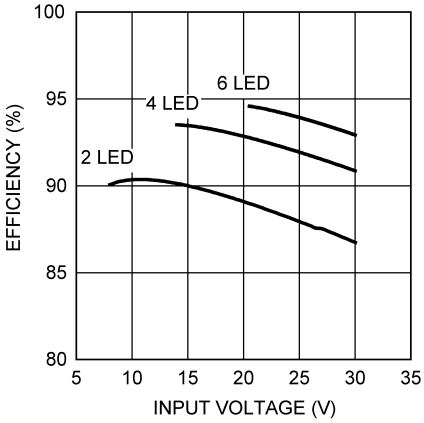

T_A = 125°C

Figure 6. Efficiency vs Input Voltage

Copyright © 2008–2016, Texas Instruments Incorporated

Typical Characteristics (continued)

All curves taken at V_{IN} = 12 V with configuration in typical application for driving two power LEDs with I_{LED} = 0.35 A shown in this data sheet and T_A = 25°C, unless otherwise specified.

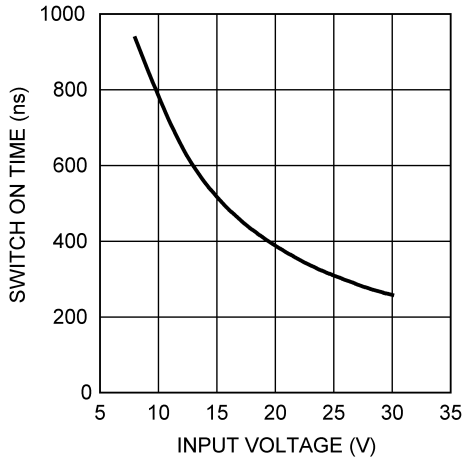


Figure 7. Switch On Time vs Input Voltage

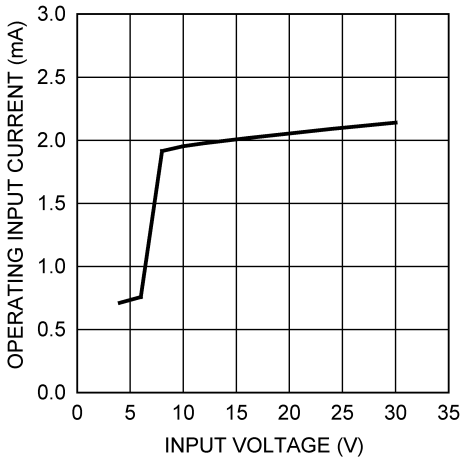


Figure 8. Operating Input Current vs Input Voltage

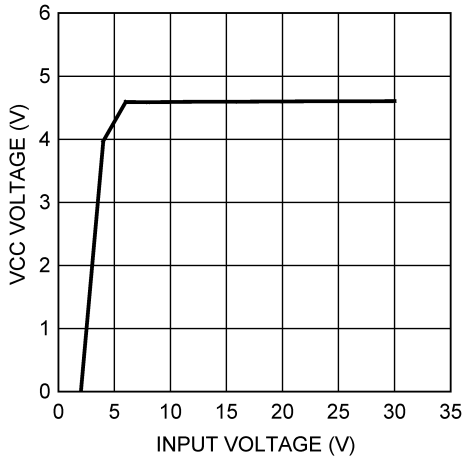


Figure 9. VCC Voltage vs Input Voltage

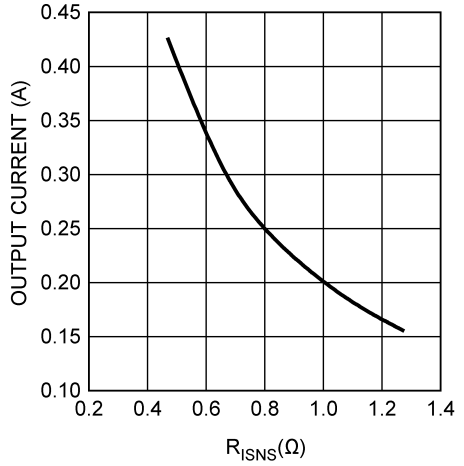


Figure 10. Output Current vs R_{ISNS}


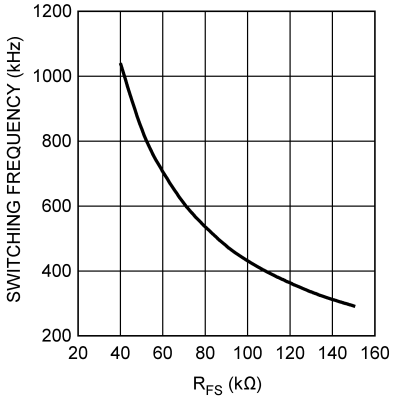


Figure 11. Switching Frequency vs R_{FS}

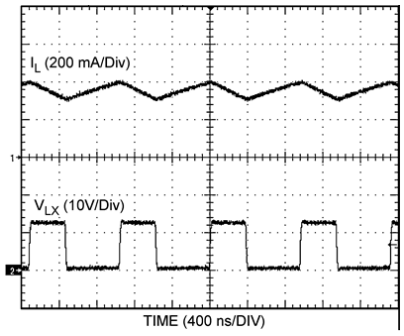


V_{IN} = 12 V L = 33 µH f_{SW} = 1 MHz

Figure 12. Continuous Mode Operation


Typical Characteristics (continued)

All curves taken at V_{IN} = 12 V with configuration in typical application for driving two power LEDs with I_{LED} = 0.35 A shown in this data sheet and T_A = 25°C, unless otherwise specified.

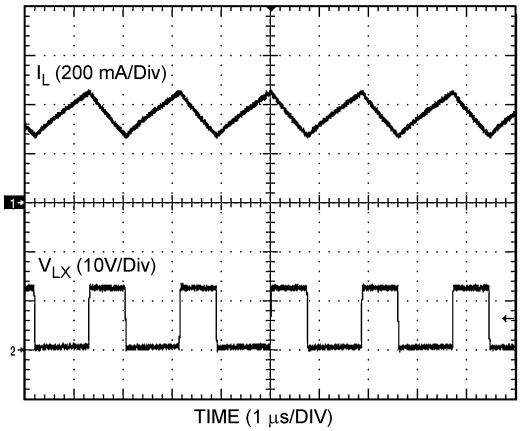


V_{IN} = 12 V L = 33 µH f_{SW} = 500 kHz

Figure 13. Continuous Mode Operation

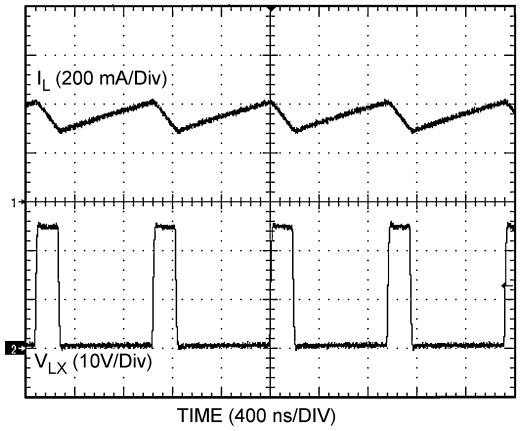


V_{IN} = 24 V L = 33 µH f_{SW} = 1 MHz

Figure 14. Continuous Mode Operation

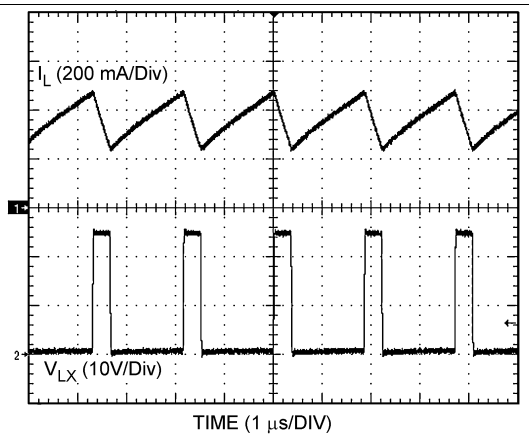


V_{IN} = 24 V L = 33 µH f_{SW} = 500 kHz

Figure 15. Continuous Mode Operation

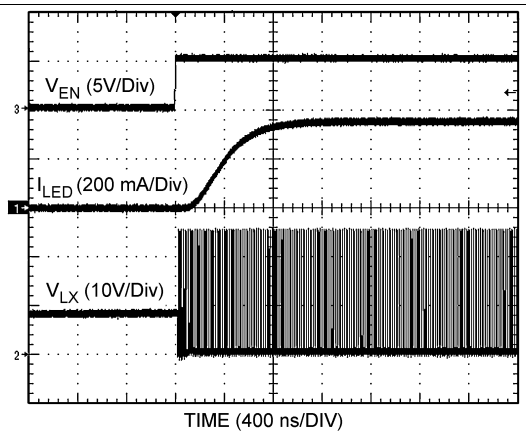

V_{IN} = 12 V L = 33 µH f_{SW} = 1 MHz

Figure 16. DIM Pin Enable Transient

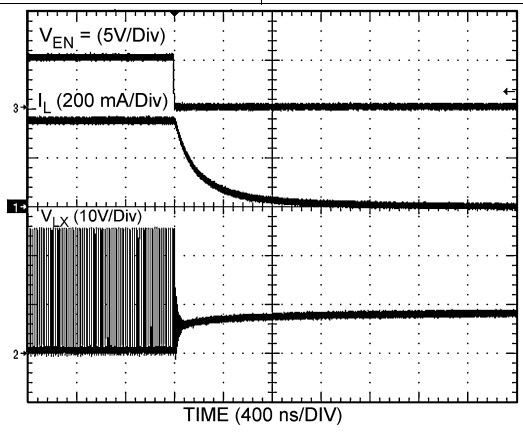

V_{IN} = 12 V L = 33 µH f_{SW} = 1 MHz

Figure 17. DIM Pin Disable Transient


Copyright © 2008–2016, Texas Instruments Incorporated

7 Detailed Description

7.1 Overview

The LM3407 is a high power floating buck LED driver with a wide input voltage range. The device requires no loop compensation network. The integrated power N-MOSFET enables high-output power with up to 350-mA output current. The combination of Pulse Width Modulation (PWM), control architecture, and the proprietary Pulse Level Modulation (PLM) ensures accurate current regulation, good EMI performance, and provides high flexibility on inductor selection. High-speed dimming control input allows precision and high resolution brightness control for applications require fine brightness adjustment.

7.2 Functional Block Diagram

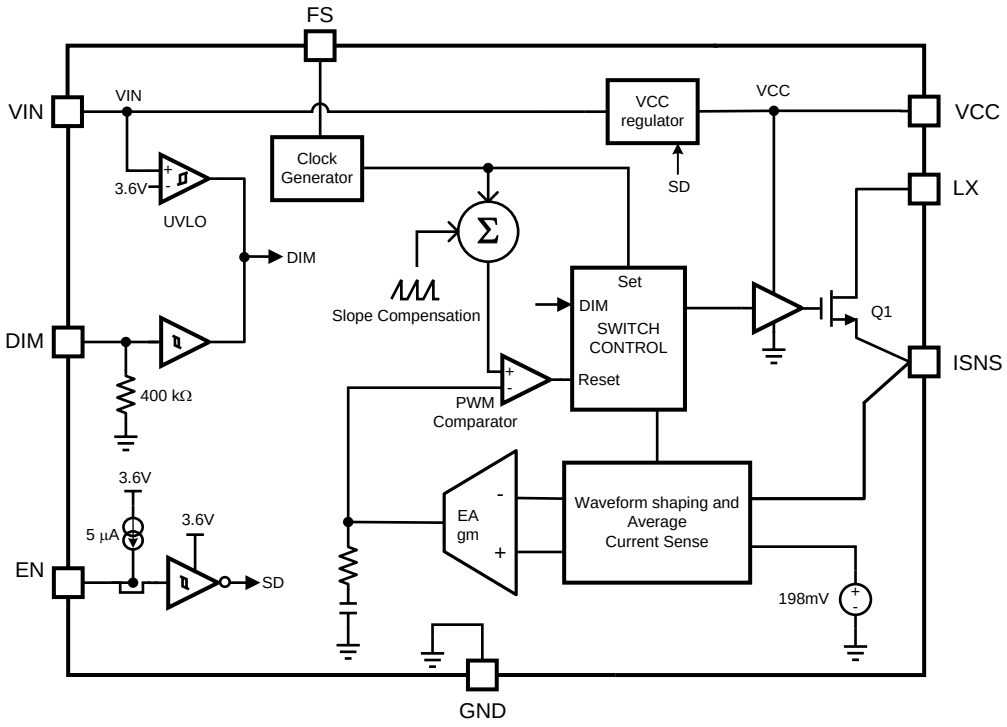

Copyright © 2016, Texas Instruments Incorporated

7.3 Feature Description

7.3.1 Floating Buck Switching Converter

The LM3407 is designed for floating buck configuration. Different from conventional buck converters, a low-side power N-MOSFET is used. The floating buck configuration simplifies the driver stage design and reduces the die size of the power MOSFET. Additionally, the connections of the power diode, inductor and output capacitor are switched to ground with a ground referenced power switch, Q1. The extraction of inductor current information can be easily realized by a simple current sensing resistor. These benefits combine to provide a high efficiency, low cost, and reliable solution for LED lighting applications.

The operation of the LM3407 constant current output floating buck converter is explained below. With the internal switch Q1 turned ON, current flows through the inductor L1 and the LED array. Energy is also stored in the magnetic field of the inductor during the ON cycle. The current flowing through R_{ISNS} during the ON cycle is monitored by the Average Current Sensing block. The switch will remain ON until the average inductor current equals 198 mV / R_{ISNS}. When the switch is turned OFF, the magnetic field starts to collapse and the polarity of the inductor voltage reverses. At the same time, the diode is forward biased and current flows through the LED, releasing the energy stored in the inductor to the output. True average output current is achieved as the switching cycle continuously repeats and the Average Current Sensing block controls the ON duty cycle. A constant current output floating buck converter only works in Continuous Conduction Mode (CCM); if the converter enters Discontinuous Conduction Mode (DCM) operation, the current regulation will deteriorate and the accuracy of LED current cannot be maintained. The operating waveforms for the typical application circuit are shown in Figure 18.

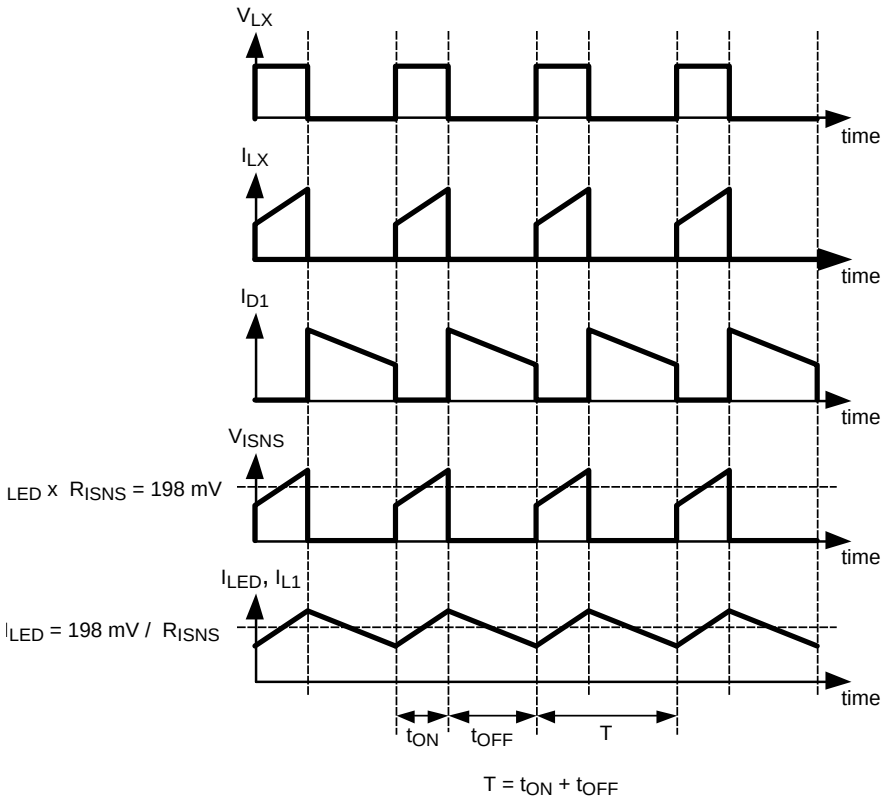


Figure 18. Operating Waveforms of a Floating Buck Converter

Copyright © 2008–2016, Texas Instruments Incorporated

Feature Description (continued)

7.3.2 Pulse Level Modulation (PLM)

The LM3407 incorporates the innovative Pulse Level Modulation technique. With an external 1% thick film resistor connected to the ISNS pin, the converter output voltage can adjust automatically as needed to deliver constant current within 10% accuracy to a serially connected LED string of different number and type. Pulse Level Modulation is a novel method to provide precise constant current control with high efficiency. It allows the use of low side current sensing and facilitates true average output current regulation regardless of the input voltage and inductor value. Pulse Level Modulation can be treated as a process that transforms a trapezoidal pulse chain into a square pulse chain with an amplitude equal to the center of inductor current ramp. Figure 19 shows the waveform of the converter in steady state. In the figure, I_{L1} is the inductor current and I_{LX} is the switch current into the LX pin. V_{ISNS} is the voltage drop across the current sensing resistor R_{ISNS}. V_{MSL} is the center of the inductor current ramp and is a reference pulse that is synchronized and has an identical pulse width to V_{ISNS}.

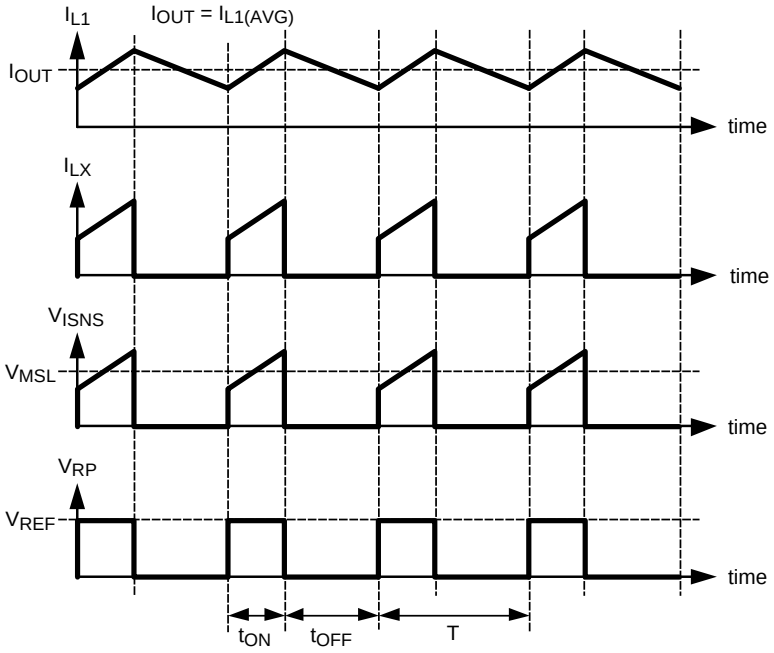


Figure 19. LM3407 Switching Waveforms

The switching frequency and duty ratio of the converter equal:

$$D = \frac{t_{ON}}{t_{ON} + t_{OFF}}$$

and

$$f_{SW} = \frac{1}{t_{ON} + t_{OFF}} \quad (1)$$

By comparing the area of V_{ISNS} and V_{RP} over the ON period, an error signal is generated. Such a comparison is functionally equivalent to comparing the middle level of I_{SNS} to V_{RP} during the ON-period of a switching cycle. The error signal is fed to a PWM comparator circuit to produce the PWM control pulse to drive the internal power N-MOSFET. Figure 20 shows the implementation of the PWM switching signal. The error signal is fed to a PWM comparator circuit to produce the PWM control pulse to drive the internal power N-MOSFET. Figure 20 shows the implementation of the PWM switching signal.

Copyright © 2008–2016, Texas Instruments Incorporated

Feature Description (continued)

In closed-loop operation, the difference between V_{MSL} and V_{RP} is reflected in the changes of the switching duty cycle of the power switch. This behavior is independent of the inductance of the inductor and input voltage because for the same set of I_{OUT} * R_{ISNS}, ON time, and switching period, there exists only one V_{MSL}. Figure 21 shows two sets of current sense signals named V_{ISNS1} and V_{ISNS2} that have identical frequencies and duty cycles but different shapes of trapezoidal waveforms, each generating identical PWM signals.

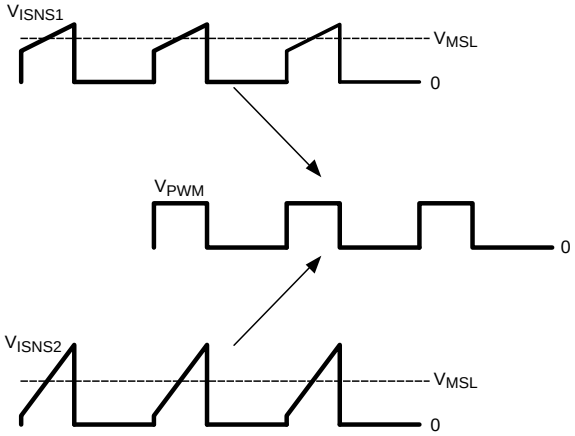


Figure 20. Pulse-Level Transformation

When V_{MSL} is higher than V_{REF}, the peak value of V_{RP}, the switching duty cycle of the power switch will be reduced to lower V_{MSL}. When V_{MSL} is lower than the peak value of V_{RP}, the switching duty cycle of the power switch will be increased to raise V_{MSL}. For example, when I_{OUT} is decreased, V_{MSL} will become lower than V_{REF}. In order to maintain output current regulation, the switching duty cycle of the power switch will be increased and eventually push up V_{MSL} until V_{MSL} equals V_{REF}. Because in typical floating buck regulators V_{MSL} is equal to I_{OUT} × R_{ISNS}, true average output current regulation can be achieved by regulating V_{MSL}. Figure 22 shows the waveforms of V_{ISNS} and V_{RP} under closed loop operation.

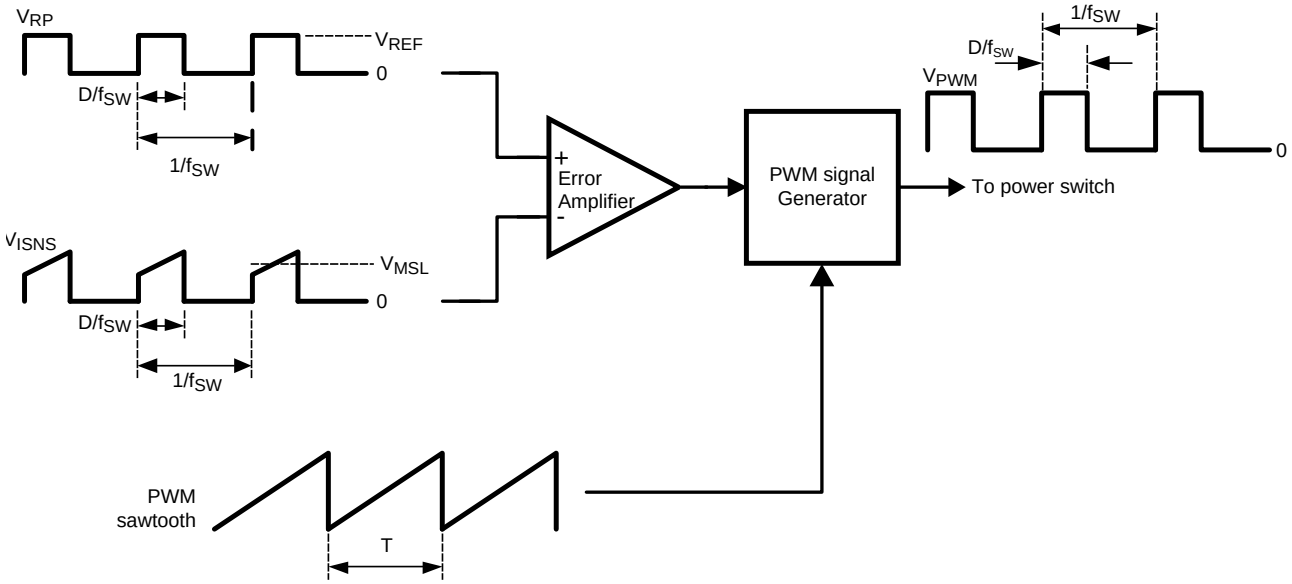


Figure 21. Implementation of the PWM Switching Signal

Copyright © 2008–2016, Texas Instruments Incorporated

Feature Description (continued)

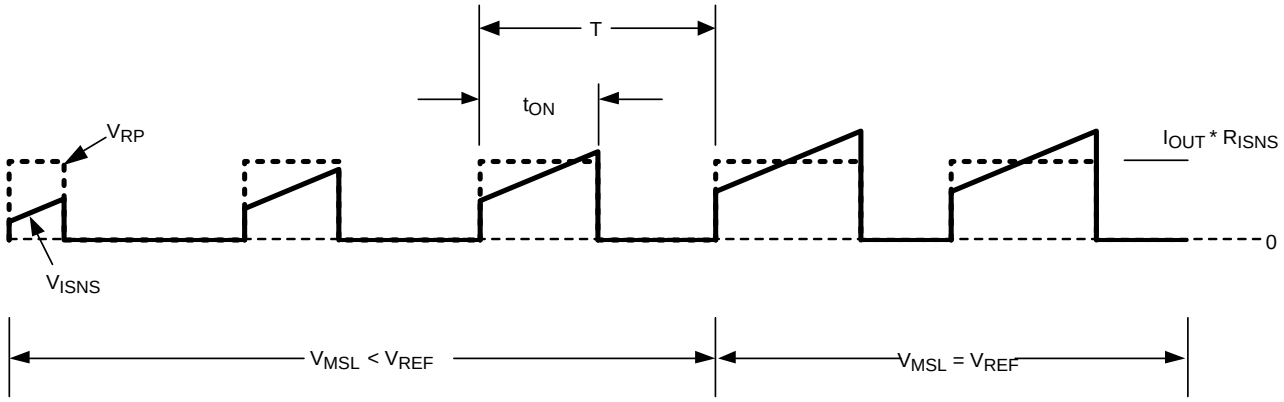


Figure 22. Waveforms of V_{ISNS} and V_{RP} Under Closed-Loop Operation

7.3.3 Internal VCC Regulator

The LM3407 has an internal 4.5 V linear regulator. This regulated voltage is used for powering the internal circuitry only and any external loading at the VCC pin is not recommended. The supply input (V_{IN}) can be connected directly to an input voltage up to 30 V. The VCC pin provides voltage regulated at 4.5 V for $V_{IN} \leq 6$ V. For 4.5 V ≤ V_{IN} ≤ 6 V, VIN pin will be connected to VCC pin directly by an internal bypassing switch. For stability reason, an external capacitor C_{VCC} with at least 680 nF (1 µF recommended) must be connected to the VCC pin.

7.3.4 Clock Generator

The LM3407 features an integrated clock generator to control the switching frequency of the converter, f_{SW}. An external resistor R_{FS}, connected to the FS pin and ground, determines the switching frequency. The oscillator frequency can be set in the range of 300 kHz to 1 MHz. The relationship between the frequency setting resistance and the oscillator frequency is described in the *Application Information* Section.

7.3.5 PWM Dimming of LED String

Dimming of LED brightness is achieved by Pulse Width Modulation (PWM) control of the LED current. Pulse Width Modulation control allows LED brightness to be adjusted while still maintaining accurate LED color temperature. The LM3407 accepts an external PWM dimming signal at the DIM pin. The signal is buffered before being applied to the internal switch control block responsible for controlling the ON/OFF of the power switch, Q1. The DIM pin is internally pulled low by a resistor and no LED current will be available when the DIM pin is floating or shorted to ground. Functionally, the DIM pin can also be used as an external device disable control. Device switching will be disabled if the DIM pin is not connected or tied to ground.

7.3.6 Input Under-Voltage Lock-Out (UVLO)

The LM3407 incorporates an input Under-Voltage Lock-Out (UVLO) circuit with hysteresis to keep the device disabled when the input voltage (V_{IN}) falls below the Lock-Out Low threshold, 3.4 V typical. During the device power-up, internal circuits are held inactive and the UVLO comparator monitors the voltage level at the VIN pin continuously. When the VIN pin voltage exceeds the UVLO threshold, 3.6 V typical, the internal circuits are then enabled and normal operation begins.

7.4 Device Functional Modes

7.4.1 Low-Power Shutdown Mode

The LM3407 comes with a dedicated device enable pin, EN, for low-power shutdown of the device. By putting the device in shutdown mode, most of the internal circuits will be disabled and the input current will reduced to below typically 50 µA. The EN pin is internally pulled high by a 5-µA current source. Connecting the EN pin to ground will force the device to enter low power shutdown mode. To resume normal operation, leave the EN pin open or drive with a logic high voltage.

Copyright © 2008–2016, Texas Instruments Incorporated

8 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

8.1.1 Switching Frequency Selection

The selection of switching frequency is based on the consideration of the conversion efficiency, size of the passive components, and the total solution cost. In general, increasing the switching frequency allows the use of smaller external components but decreases the conversion efficiency. Thus, the selection of switching frequency is a compromise between the system requirements and may vary from design to design. The LM3407 switching frequency can be set in the range from 300 kHz to 1 MHz by adjusting the value of R_{FS}. The switching frequency is inversely proportional to the value of R_{FS}. To ensure good operation stability, a resistor with 1% tolerance between 40 kΩ and 96 kΩ and with good thermal stability is suggested.

The switching frequency is estimated by Equation 2:

$$f_{SW} = \frac{40\ \text{Meg}}{R_{FS}} + 40\ \text{ in kHz} \tag{2}$$

where

- f_{SW} is the oscillator frequency
- R_{FS} is the frequency setting resistance

Equation 2 is only valid for oscillator frequencies in the range of 300 kHz to 1 MHz, so the frequency setting resistance will be in the range of about 40 kΩ to 150 kΩ.

8.1.2 LED Current Setting

The LED current setting is important to the lifetime, reliability, and color temperature of the LED string. The LED current should be properly selected according to the characteristics of the LED used. Over-driving the LED array can cause the color temperature to shift and will shorten the lifetime of the LEDs. The output current of the LM3407 can be set by R_{ISNS}, which is calculated from Equation 3:

$$R_{ISNS} = \frac{0.198V}{I_{OUT}} \tag{3}$$

To ensure the accuracy of the output current, a resistor with 1% tolerance should be used for R_{ISNS}. It is also important for the designer to ensure that the rated power of the resistor is not exceeded with reasonable margin. For example, when I_{OUT} is set to 350 mA, the total power dissipation on R_{ISNS} in steady state is $(0.35\ A)^2 \times 0.565\ \Omega$, which equals 69 mW, indicating a resistor of 1/8W power rating is appropriate.

8.1.3 Input and Output Capacitors

The input capacitor supplies instantaneous current to the LM3407 converter when the internal power switch Q1 turns ON. The input capacitor filters the noise and transient voltage from the input power source. Using low ESR capacitors such as ceramic and tantalum capacitors is recommended. Similar to the selection criteria for the output capacitor, ceramic capacitors are the best choice for the input to the LM3407 due to their high ripple current rating, low ESR, and relatively small size compared to other types. A 4.7-µF X7R ceramic capacitor for the input capacitor is recommended

Copyright © 2008–2016, Texas Instruments Incorporated

Application Information (continued)

The output capacitor C_{OUT} is used to reduce LED current ripple, filter noise, and smooth output voltage. This capacitor should have low ESR and adequate capacitance. Excessively large output capacitances create long enable and disable times, which is particularly significant when a high dimming frequency is used. Because the loading and input conditions differ from design to design, a 2.2-µF X7R ceramic capacitor is a good initial selection. A DC voltage rating equal to or higher than twice the forward voltage of the LED string is recommended.

C_{OUT} is optional and can be omitted for applications where small brightness variation is acceptable. Omitting C_{OUT} also helps reduce the cost and board size of the converter. With the absence of C_{OUT}, the LED forward current equals the inductor current. To ensure proper operation of the converter, the peak inductor current must not exceed the rated forward current of the LEDs. Otherwise the LEDs may be damaged.

8.1.4 Selection of Inductor

To achieve accurate constant current output, the LM3407 is required to operate in Continuous Conduction Mode (CCM) under all operating conditions. In general, the magnitude of the inductor ripple current should be kept as small as possible. If the PCB size is not limited, higher inductance values result in better accuracy of the output current. However, to minimize the physical size of the circuit, an inductor with minimum physical outline should be selected such that the converter always operates in CCM and the peak inductor current does not exceed the saturation current limit of the inductor. The ripple and peak current of the inductor can be calculated as follows:

Inductor Peak to Peak Ripple Current:

$$I_{L(ripple)} = \frac{\left[V_{IN} - (n \times V_F) - 0.198\left(1 + \frac{1}{R_{ISNS}}\right)\right] \times (n \times V_F)}{L \times V_{IN} \times f_{SW}} \quad (4)$$

Peak Inductor Current:

$$I_{L(peak)} = \frac{0.198}{R_{ISNS}} + \frac{I_{L(ripple)}}{2} \quad (5)$$

where

- n is the number of LEDs in a string
- V_F is the forward voltage of one LED.

The minimum inductance required for the specific application can be calculated by Equation 6:

$$L_{min} = \frac{\left[V_{IN} - (n \times V_F) - 0.198 \times \left(1 + \frac{1}{R_{ISNS}}\right)\right] \times (R_{ISNS} \times n \times V_F)}{0.197 \times V_{IN} \times f_{SW}} \quad (6)$$

For applications with no output capacitor in place, the magnitude of the inductor ripple current should not be more than 20% of the average inductor current, which is equivalent to the output current, I_{OUT}. However, in some situations the physical size of the required inductor may be too large and thus not allowed. The output capacitor can help absorb this current ripple to significantly reduce the ripple component along the LED string. With an output capacitor C_{OUT} in place, the magnitude of the inductor ripple current can be relaxed to 80% of the output current. Figure 23 illustrates the relationship between I_{OUT}, $I_{L(peak)}$, and $I_{L(ripple)}$.

Copyright © 2008–2016, Texas Instruments Incorporated

Application Information (continued)

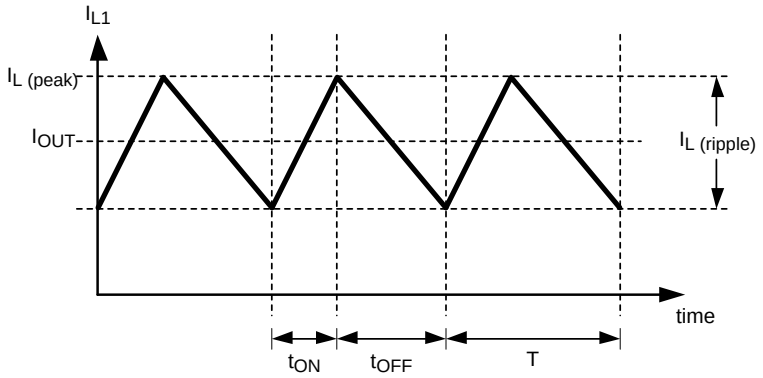


Figure 23. Relationship Between I_{OUT}, $I_{L(peak)}$ and $I_{L(ripple)}$

Table 1 provides the suggested inductance of the inductor for 500 kHz and 1 MHz switching frequency operation with C_{OUT} = 4.7 µF and $I_{L(ripple)} = 0.8 \times I_{OUT}$

Table 1. Suggested Inductance Value of the Inductor

VIN / V	Number of LED						
	1	2	3	4	5	6	7
Inductor selection table for F_{SW} = 500 kHz, C_{OUT} = 4.7 µF (1 µF for 1 LED)							
5	22 µH						
10	22 µH	22 µH					
15	22 µH	22 µH	22 µH				
20	22 µH	33 µH	22 µH	22 µH	22 µH		
25	22 µH	33 µH	33 µH	22 µH	22 µH	22 µH	
30	22 µH	47 µH	33 µH	33 µH	33 µH	22 µH	22 µH
Inductor selection table for F_{SW} = 1 MHz, C_{OUT} = 4.7 µF (1 µF for 1 LED)							
5	22 µH						
10	22 µH	22 µH					
15	22 µH	22 µH	22 µH				
20	22 µH	22 µH	22 µH	22 µH	22 µH		
25	22 µH	33 µH	22 µH	22 µH	22 µH	22 µH	
30	22 µH	33 µH	33 µH	33 µH	22 µH	22 µH	22 µH


8.1.5 Free-Wheeling Diode

The LM3407 is a non-synchronous floating buck converter that requires an external free-wheeling diode to provide a path for recirculating current from the inductor to the LED array when the power switch is turned OFF. Selecting the free-wheeling diode depends on both the output voltage and current. The diode must have a rated reverse voltage higher than the input voltage of the converter and a peak current rating higher than the expected maximum inductor current. Using a schottky diode with a low forward voltage drop can reduce power dissipation and enhance conversion efficiency.

Copyright © 2008–2016, Texas Instruments Incorporated

8.2 Typical Applications

8.2.1 LM3407 Design Example

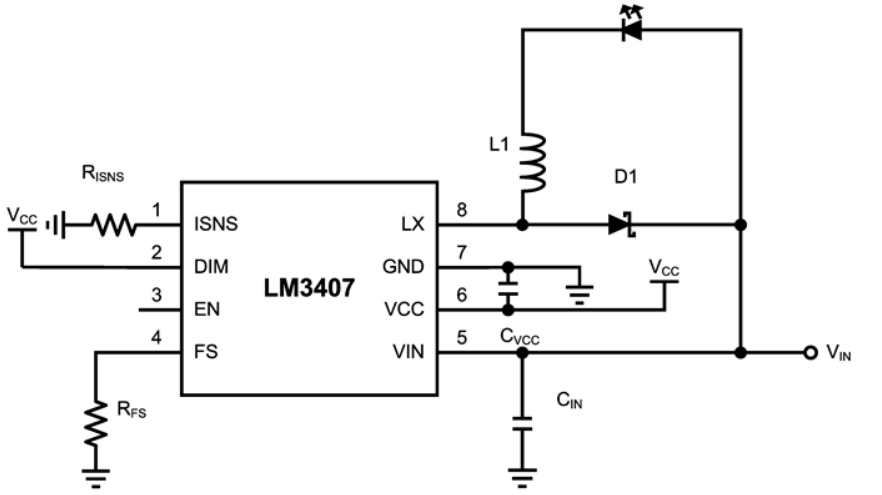

Copyright © 2016, Texas Instruments Incorporated

Figure 24. LM3407 Design Example Schematic

8.2.1.1 Design Requirements

- Input Voltage: V_{IN} = 12 V ±10%
- LED String Voltage: V_{LED} = 6.4 V (2 series white LEDs)
- LED Current: I_{LED} = 350 mA
- Switching Frequency: f_{SW} = 1 MHz

8.2.1.2 Detailed Design Procedure

This design is intended to be a small size, low-cost solution. An output capacitor will not be used to save on size and cost so a high switching frequency will be used and a higher value inductor than recommended in Table 1 will be used to keep LED current ripple lower.

8.2.1.2.1 Calculate R_{ISNS}

For 350 mA LED current calculate the value for R_{ISNS} using Equation 7.

$$R_{ISNS} = \frac{0.198V}{I_{OUT}} = \frac{0.198V}{0.35A} = 0.5657\Omega \quad (7)$$

Choose a standard value of **R_{ISNS} = 0.565 Ω**.

8.2.1.2.2 Calculate R_{FS}

Calculate the value of R_{FS} for 1-MHz switching frequency using Equation 8.

$$R_{FS} = \frac{40 \times 10^6}{f_{SW} - 40} = \frac{40 \times 10^6}{1000 - 40} = 41.6k\Omega \quad (8)$$

Choose a standard value of **R_{FS} = 40.2 kΩ**.

8.2.1.2.3 Choose L

Referring to Table 1 the recommended inductor value for 12 V input and 2 LED output is 22 µH.

Choose a higher standard value of **L = 33 µH** to reduce ripple since an output capacitor will not be used for this design.

Typical Applications (continued)

8.2.1.2.4 Choose C_{IN} and C_{VCC}

Choose the recommended values of **C_{IN} = 4.7 µF** and **C_{VCC} = 1 µF**. C_{IN} should be a 16 V or greater ceramic capacitor and C_{VCC} should be a 10 V or greater ceramic capacitor. Both should use an X5R or X7R dielectric.

8.2.1.3 Application Curve

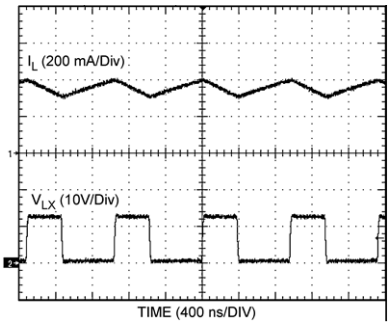


Figure 25. LED Current and Switch Voltage Waveforms

8.2.2 Typical Application for Driving 6 LEDs

Figure 26 shows a high voltage, 6-W application for driving 6 LEDs. The switching frequency is set at 1 MHz and the LED current is set at 350 mA.

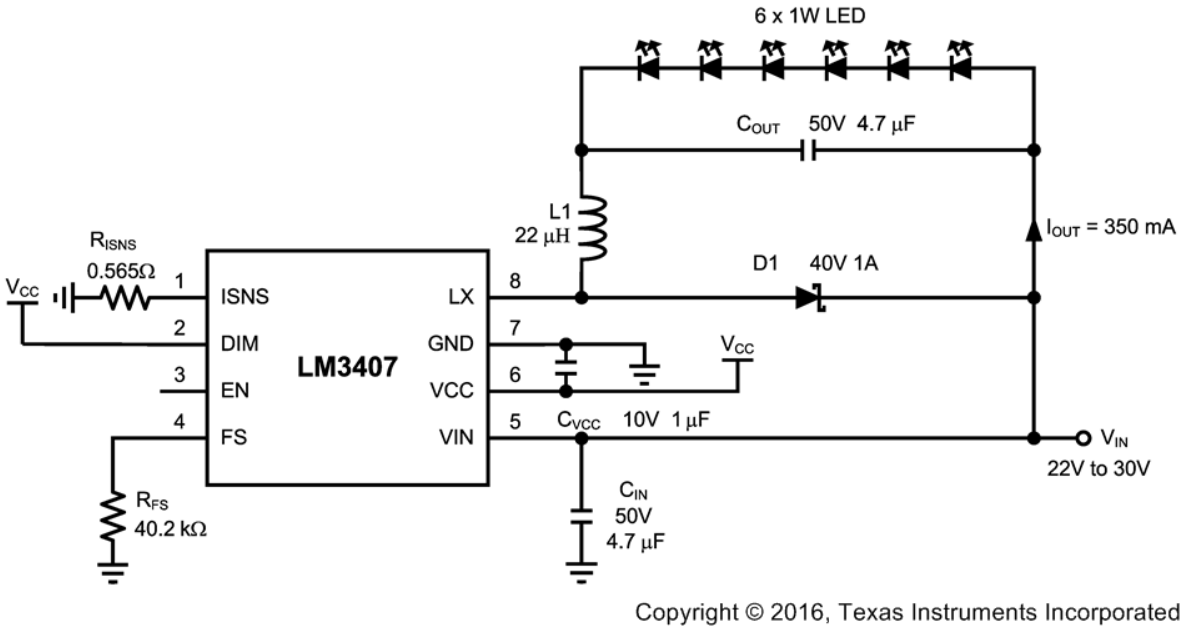



Figure 26. LM3407 6 LED Example Schematic

Copyright © 2008–2016, Texas Instruments Incorporated

Typical Applications (continued)

8.2.3 Typical Application for Driving 1 LED

Figure 27 shows a low voltage, 1-W application for driving 1 LED. The switching frequency is set at 1 MHz and the LED current is set at 350 mA.

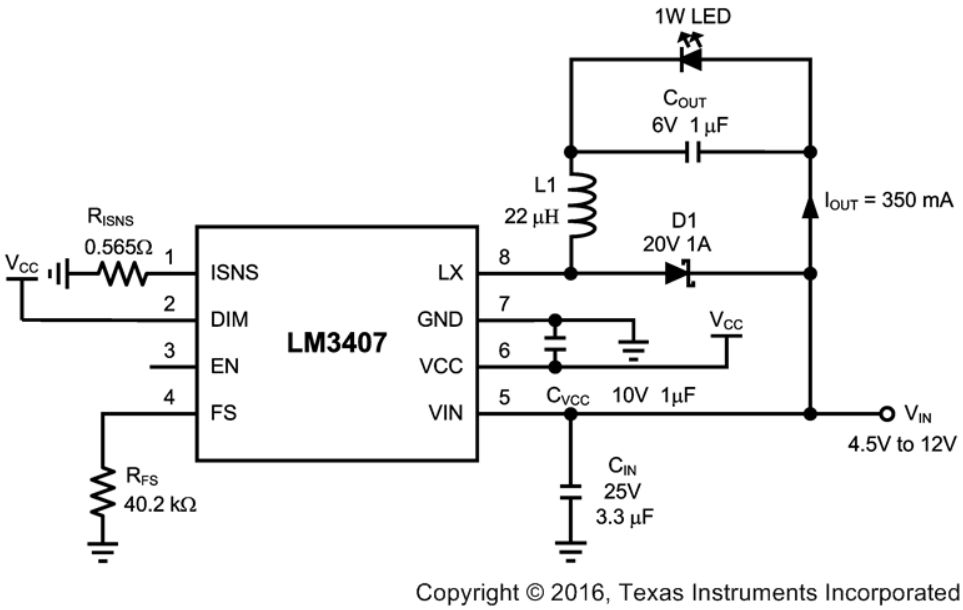

Copyright © 2016, Texas Instruments Incorporated

Figure 27. LM3407 1 LED Example Schematic

9 Power Supply Recommendations

Use any DC output power supply with a maximum voltage high enough for the application. The power supply should have a minimum current limit of at least 1 A.

10 Layout

10.1 Layout Guidelines

Because the copper traces of PCBs carry resistance and parasitic inductance, the longer the copper trace, the higher the resistance and inductance. These factors introduce voltage and current spikes to the switching nodes and may impair circuit performance. To optimize the performance of the LM3407, the rule of thumb is to keep the connections between components as short and direct as possible. Because true average current regulation is achieved by detecting the average switch current, the current setting resistor R_{ISNS} must be located as close as possible to the LM3407 to reduce the parasitic inductance of the copper trace and avoid noise pick-up. The connections between the LX pin, rectifier D1, inductor L1, and output capacitor C_{OUT} should be kept as short as possible to reduce the voltage spikes at the LX pin. TI recommends that C_{VCC}, the output filter capacitor for the internal linear regulator of the LM3407, be placed close to the VCC pin. The input filter capacitor C_{IN} should be located close to L1 and the cathode of D1. If C_{IN} is connected to the VIN pin by a long trace, a 0.1-µF capacitor should be added close to VIN pin for noise filtering.

CAUTION

In normal operation, heat will be generated inside the LM3407 and may damage the device if no thermal management is applied. For more details on switching power supply layout considerations see *AN-1149 Layout Guidelines for Switching Power Supplies* (SNVA021).

10.2 Layout Example

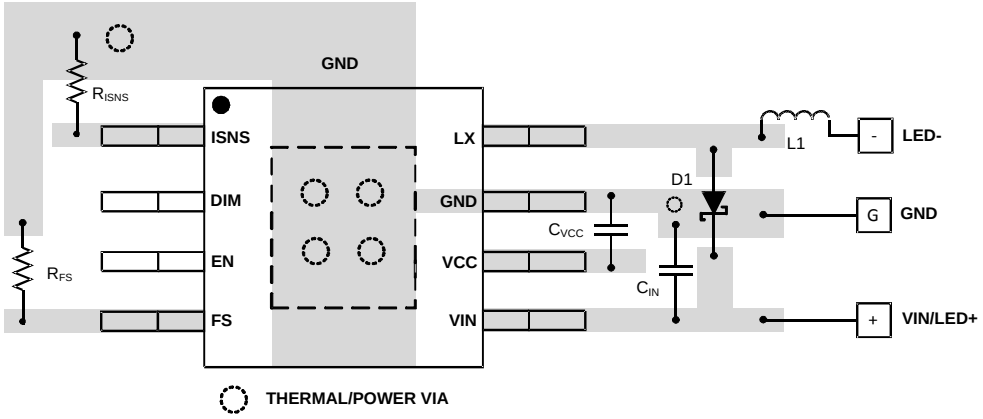


Figure 28. Layout Recommendation

Copyright © 2008–2016, Texas Instruments Incorporated

11 Device and Documentation Support

11.1 Documentation Support

11.1.1 Related Documentation

For related documentation see the following:

AN-1149 Layout Guidelines for Switching Power Supplies (SNVA021).

11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community ***TI's Engineer-to-Engineer (E2E) Community.*** Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support ***TI's Design Support*** Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.4 Trademarks

E2E is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

11.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

11.6 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2008–2016, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LM3407MY/NOPB	Active	Production	HVSSOP (DGN) | 8	1000 | SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	STZB
LM3407MY/NOPB.A	Active	Production	HVSSOP (DGN) | 8	1000 | SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	STZB
LM3407MY/NOPB.B	Active	Production	HVSSOP (DGN) | 8	1000 | SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	STZB
LM3407MYX/NOPB	Active	Production	HVSSOP (DGN) | 8	3500 | LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	STZB
LM3407MYX/NOPB.A	Active	Production	HVSSOP (DGN) | 8	3500 | LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	STZB
LM3407MYX/NOPB.B	Active	Production	HVSSOP (DGN) | 8	3500 | LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	STZB

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

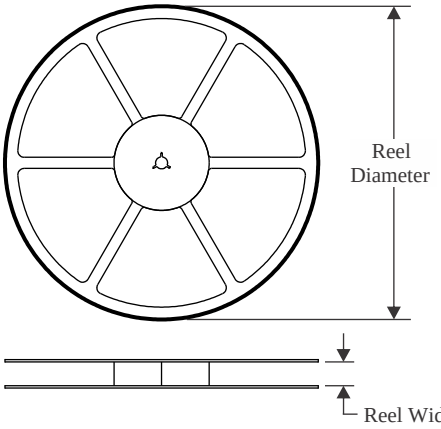


TAPE DIMENSIONS

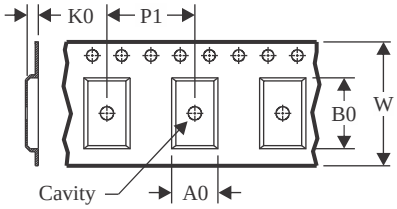

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

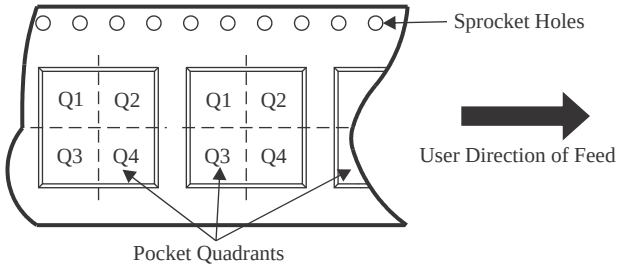

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LM3407MY/NOPB	HVSSOP	DGN	8	1000	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LM3407MYX/NOPB	HVSSOP	DGN	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

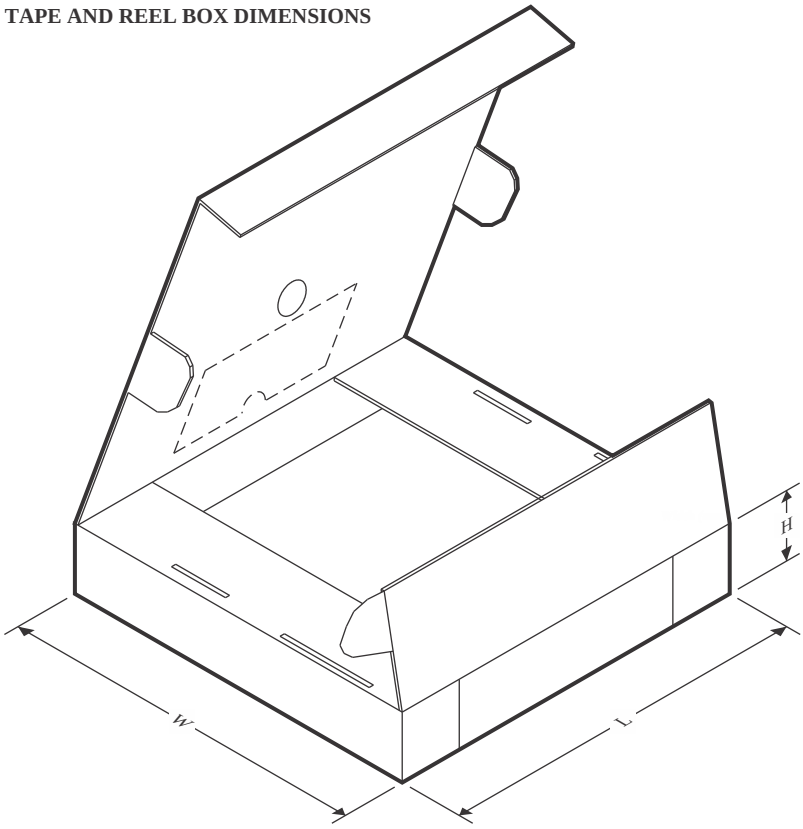


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LM3407MY/NOPB	HVSSOP	DGN	8	1000	208.0	191.0	35.0
LM3407MYX/NOPB	HVSSOP	DGN	8	3500	367.0	367.0	35.0


PACKAGE OUTLINE

DGN0008A



PowerPAD™ VSSOP - 1.1 mm max height


SMALL OUTLINE PACKAGE

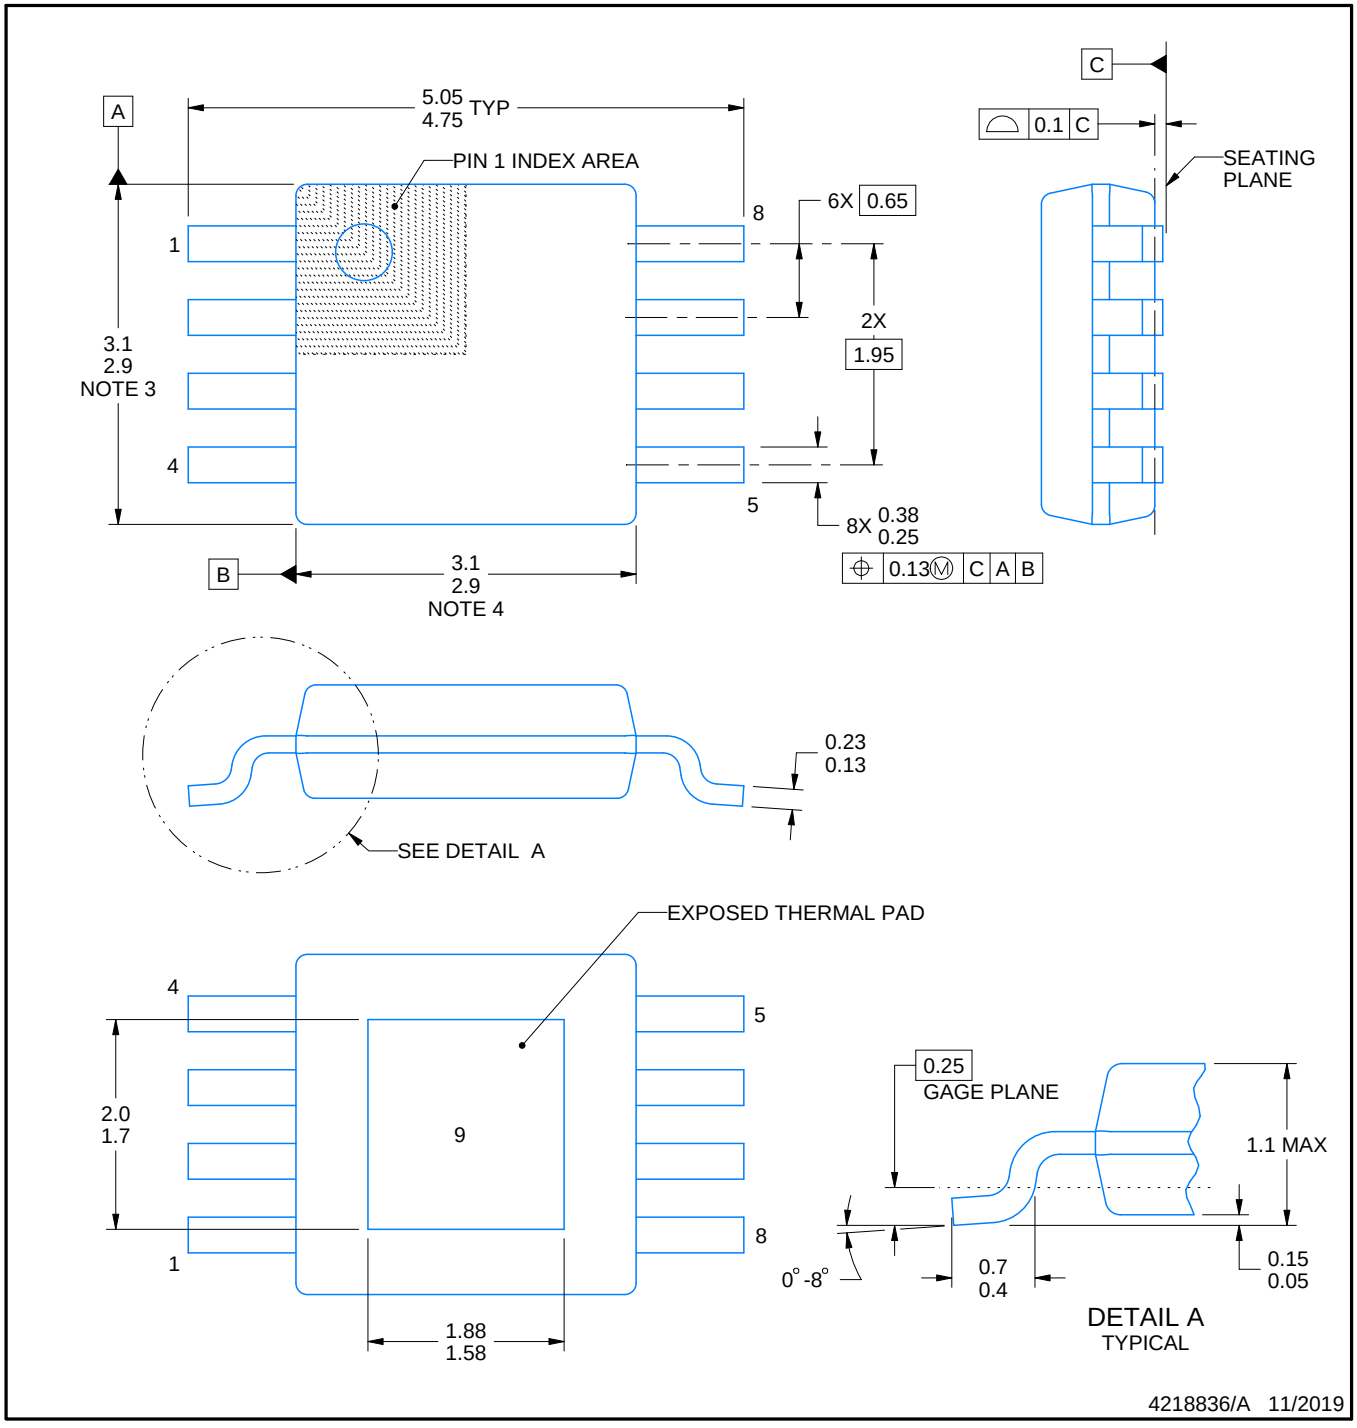


PowerPAD is a trademark of Texas Instruments.

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

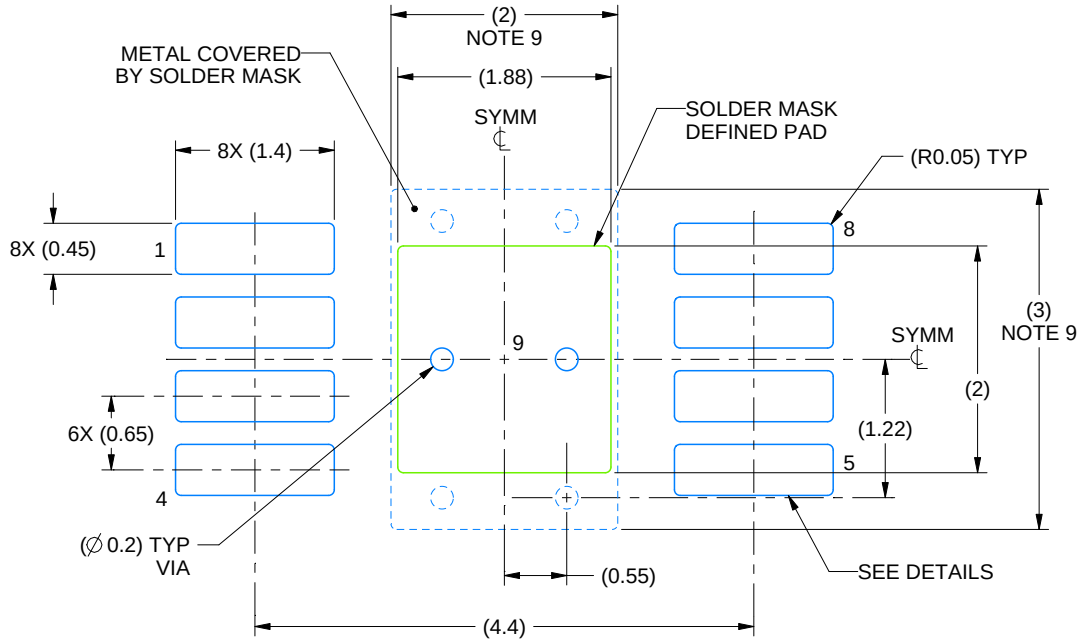

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

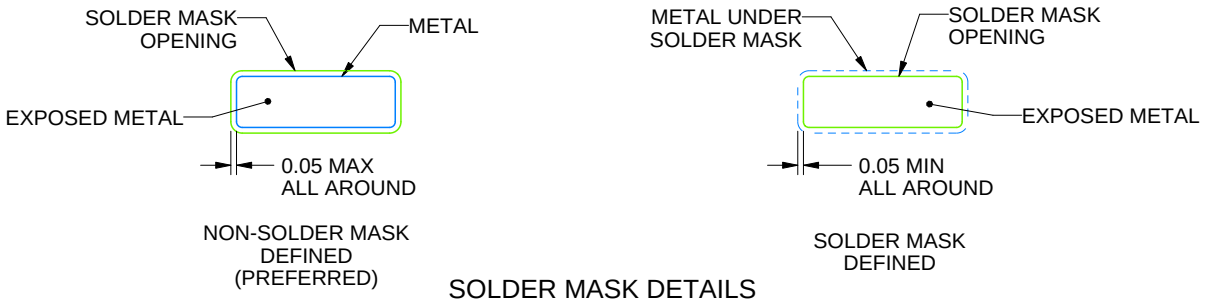

SOLDER MASK DETAILS

4218836/A 11/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

DGN0008A

PowerPAD™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

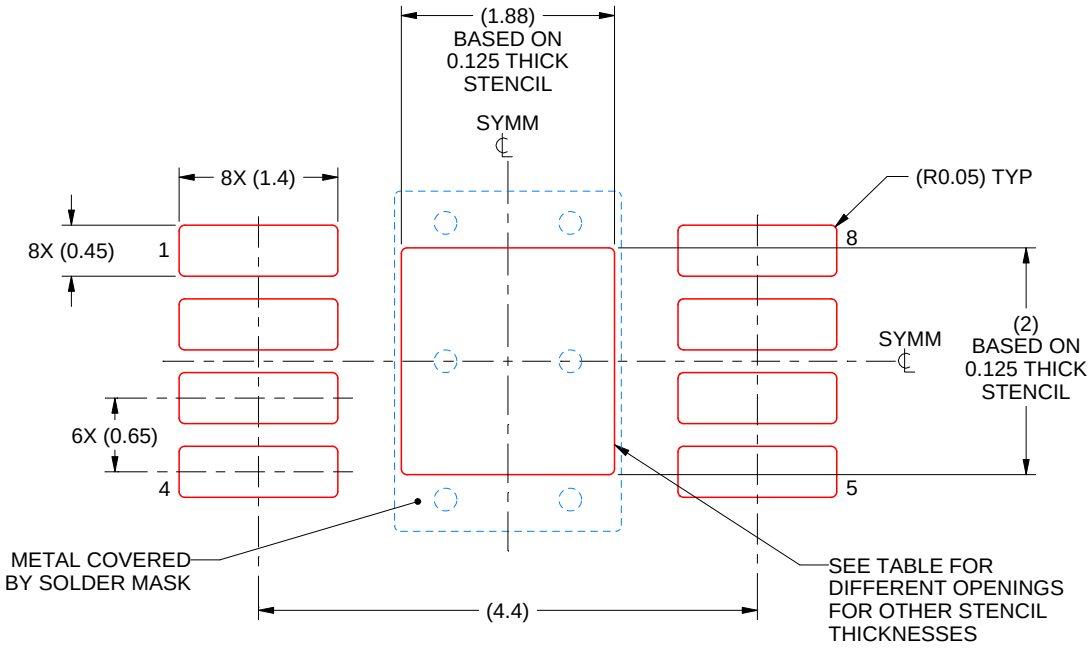

SOLDER PASTE EXAMPLE
EXPOSED PAD 9:
100% PRINTED SOLDER COVERAGE BY AREA
SCALE: 15X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	2.10 X 2.24
0.125	1.88 X 2.00 (SHOWN)
0.15	1.72 X 1.83
0.175	1.59 X 1.69

4218836/A 11/2019

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025