1.5A Fast-Response High-Accuracy LDO Linear Regulator with Enable

Check for Samples: LP38855

FEATURES

- **Standard V_{OUT} Values of 0.8V and 1.2V**
- **Wide V_{BIAS} Supply Operating Range of 3.0V to 5.5V**
- **Stable with 10 µF Ceramic Capacitors**
- **Dropout Voltage of 130 mV (Typical) at 1.5A Load Current**
- **Precision Output Voltage Across All Line and Load Conditions:**
  - **±1.0% for T_J = 25°C**
  - **±2.0% for 0°C ≤ T_J ≤ +125°C**
  - **±3.0% for -40°C ≤ T_J ≤ +125°C**
- **Over-Temperature and Over-Current Protection**
- **Available in 5 Lead TO-220 and DDPAK/TO-263 Packages**
- **Custom V_{OUT} Values between 0.8V and 1.2V are Available**
- **-40°C to +125°C Operating Temperature Range**

APPLICATIONS

- **ASIC Power Supplies In:**
  - **Desktops, Notebooks, and Graphics Cards, Servers**
  - **Gaming Set Top Boxes, Printers and Copiers**
- **Server Core and I/O Supplies**
- **DSP and FPGA Power Supplies**
- **SMPS Post-Regulator**

DESCRIPTION

The LP38855 is a high-current, fast-response regulator which can maintain output voltage regulation with an extremely low input to output voltage drop. Fabricated on a CMOS process, the device operates from two input voltages: V_{BIAS} provides power for the internal bias and control circuits, as well as drive for the gate of the N-MOS power transistor, while V_{IN} supplies power to the load. The use of an external bias rail allows the part to operate from ultra low V_{IN} voltages. Unlike bipolar regulators, the CMOS architecture consumes extremely low quiescent current at any output load current. The use of an N-MOS power transistor results in wide bandwidth, yet minimum external capacitance is required to maintain loop stability.

The fast transient response of this device makes it suitable for use in powering DSP, Microcontroller Core voltages and Switch Mode Power Supply post regulators. The LP38855 is available in TO-220 and DDPAK/TO-263 5-Lead packages.


Dropout Voltage: 130 mV (typical) at 1.5A load current.

Low Ground Pin Current: 10 mA (typical) at 1.5A load current.

Shutdown Current: 1 µA (typical) $I_{IN(GND)}$ when EN pin is low.

Precision Output Voltage: ±1.0% for T_J = 25°C and ±2.0% for 0°C ≤ T_J ≤ +125°C, across all line and load conditions

Typical Application Circuit

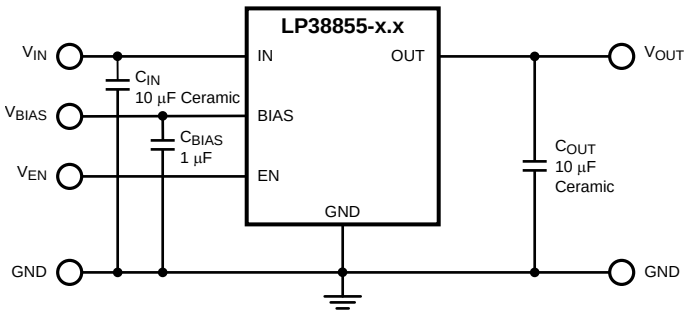

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2006–2013, Texas Instruments Incorporated

Connection Diagrams

Top View




Figure 1. DDPAK/TO-263 Package
See Package Number KTT0005B

Top View

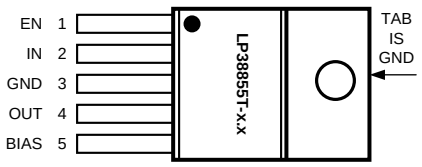


Figure 2. TO-220 Package
See Package Number NDH0005D

PIN DESCRIPTIONS
TO-220–5 and DDPAK/TO-263–5 Packages

Pin #	Pin Symbol	Pin Description
1	EN	The device Enable pin.
2	IN	The unregulated input voltage pin
3	GND	Ground
4	OUT	The regulated output voltage pin
5	BIAS	The supply for the internal control and reference circuitry
TAB	TAB	The TAB is a thermal connection that is physically attached to the backside of the die, and is used as a thermal heat-sink connection. See the Application Information section for details



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings[1][2]

Storage Temperature Range		−65°C to +150°C
Lead Temperature	Soldering, 5 seconds	260°C
ESD Rating	Human Body Model[3]	±2 kV
Power Dissipation[4]		Internally Limited
V_{IN} Supply Voltage (Survival)		−0.3V to +6.0V
V_{BIAS} Supply Voltage (Survival)		−0.3V to +6.0V
V_{EN} Voltage (Survival)		−0.3V to +6.0V
V_{OUT} Voltage (Survival)		−0.3V to +6.0V
I_{OUT} Current (Survival)		Internally Limited
Junction Temperature		−40°C to +150°C

(1) Absolute maximum ratings indicate limits beyond which damage to the component may occur. Operating ratings indicate conditions for which the device is intended to be functional, but do not ensure specific performance limits. For ensured specifications, see Electrical Characteristics. Specifications do not apply when operating the device outside of its rated operating conditions.
(2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/Distributors for availability and specifications.
(3) The Human Body Model (HBM) is a 100 pF capacitor discharged through a 1.5k resistor into each pin. Test method is per JESD22-A114. The HBM rating for device pin 1 (EN) is ±1.5 kV.
(4) Device power dissipation must be de-rated based on device power dissipation (T_D), ambient temperature (T_A), and package junction to ambient thermal resistance (θ_{JA}). Additional heat-sinking may be required to ensure that the device junction temperature (T_J) does not exceed the maximum operating rating. See the Application Information section for details.

Copyright © 2006–2013, Texas Instruments Incorporated

Operating Ratings(1)

V_{IN} Supply Voltage	(V_{OUT} + V_{DO}) to V_{BIAS}
V_{BIAS} Supply Voltage	3.0V to 5.5V
V_{EN} Enable Input Voltage	0.0V to V_{BIAS}
I_{OUT}	0 mA to 1.5A
Junction Temperature Range(2)	−40°C to +125°C

(1) Absolute maximum ratings indicate limits beyond which damage to the component may occur. Operating ratings indicate conditions for which the device is intended to be functional, but do not ensure specific performance limits. For ensured specifications, see Electrical Characteristics. Specifications do not apply when operating the device outside of its rated operating conditions.
(2) Device power dissipation must be de-rated based on device power dissipation (T_D), ambient temperature (T_A), and package junction to ambient thermal resistance (θ_{JA}). Additional heat-sinking may be required to ensure that the device junction temperature (T_J) does not exceed the maximum operating rating. See the Application Information section for details.

Electrical Characteristics

Unless otherwise specified: $V_{IN} = V_{OUT(NOM)} + 1V$, $V_{BIAS} = 3.0V$, $I_{OUT} = 10$ mA, $C_{IN} = C_{OUT} = 10$ µF, $C_{BIAS} = 1$µF, $V_{EN} = V_{BIAS}$. Limits in standard type are for $T_J = 25°C$ only; limits in **boldface type** apply over the junction temperature (T_J) range of -40°C to +125°C. Minimum and Maximum limits are ensured through test, design, or statistical correlation. Typical values represent the most likely parametric norm at $T_J = 25°C$, and are provided for reference purposes only.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{OUT}	Output Voltage Tolerance	$V_{OUT(NOM)} + 1V \le V_{IN} \le V_{BIAS}$, $3.0V \le V_{BIAS} \le 5.5V$, $10\text{ mA} \le I_{OUT} \le 1.5A$	-1.0 **-3.0**	0	+1.0 **+3.0**	%
		$V_{OUT(NOM)} + 1V \le V_{IN} \le V_{BIAS}$, $3.0V \le V_{BIAS} \le 5.5V$, $10\text{ mA} \le I_{OUT} \le 1.5A$, $0°C \le T_J \le 125°C$	-2.0	0	+2.0	
$\Delta V_{OUT}/\Delta V_{IN}$	Line Regulation, V_{IN}(1)	$V_{OUT(NOM)} + 1V \le V_{IN} \le V_{BIAS}$	-	0.04	-	%/V
$\Delta V_{OUT}/\Delta V_{BIAS}$	Line Regulation, V_{BIAS}(1)	$3.0V \le V_{BIAS} \le 5.5V$	-	0.10	-	%/V
$\Delta V_{OUT}/\Delta I_{OUT}$	Output Voltage Load Regulation(2)	$10\text{ mA} \le I_{OUT} \le 1.5A$	-	0.2	-	%/A
V_{DO}	Dropout Voltage, $V_{IN} - V_{OUT}$(3)	$I_{OUT} = 1.5A$	-	130	165 **180**	mV
$I_{GND(IN)}$	Ground Pin Current Drawn from V_{IN} Supply	LP38855-0.8 $10\text{ mA} \le I_{OUT} \le 1.5A$	-	7.0	8.5 **9.0**	mA
		LP38855-1.2 $10\text{ mA} \le I_{OUT} \le 1.5A$	-	11	12 **15**	
		$V_{EN} \le 0.5V$	-	1.0	10 **300**	µA
$I_{GND(BIAS)}$	Ground Pin Current Drawn from V_{BIAS} Supply	$10\text{ mA} \le I_{OUT} \le 1.5A$	-	3.0	3.8 **4.5**	mA
		$V_{EN} \le 0.5V$	-	100	170 **200**	µA
UVLO	Under-Voltage Lock-Out Threshold	V_{BIAS} rising until device is functional	2.20 **2.00**	2.45	2.70 **2.90**	V
$UVLO_{(HYS)}$	Under-Voltage Lock-Out Hysteresis	V_{BIAS} falling from UVLO threshold until device is non-functional	60 **50**	150	300 **350**	mV
I_{SC}	Output Short-Circuit Current	$V_{IN} = V_{OUT(NOM)} + 1V$, $V_{BIAS} = 3.0V$, $V_{OUT} = 0.0V$	-	4.5	-	A

(1) Output voltage line regulation is defined as the change in output voltage from nominal value resulting from a change in input voltage.
(2) Output voltage load regulation is defined as the change in output voltage from nominal value as the load current increases from no load to full load.
(3) Dropout voltage is defined the as input to output voltage differential (V_{IN} - V_{OUT}) where the input voltage is low enough to cause the output voltage to drop 2% from the nominal value.

Copyright © 2006–2013, Texas Instruments Incorporated

Electrical Characteristics (continued)

Unless otherwise specified: $V_{IN} = V_{OUT(NOM)} + 1V$, $V_{BIAS} = 3.0V$, $I_{OUT} = 10$ mA, $C_{IN} = C_{OUT} = 10$ µF, $C_{BIAS} = 1$µF, $V_{EN} = V_{BIAS}$. Limits in standard type are for $T_J = 25°C$ only; limits in **boldface type** apply over the junction temperature (T_J) range of -40°C to +125°C. Minimum and Maximum limits are ensured through test, design, or statistical correlation. Typical values represent the most likely parametric norm at $T_J = 25°C$, and are provided for reference purposes only.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
ENABLE Pin						
I_{EN}	ENABLE pin Current	$V_{EN} = V_{BIAS}$	-	0.01	-	µA
		$V_{EN} = 0.0V$, $V_{BIAS} = 5.5V$	-19 **-13**	-30	-40 **-51**	
$V_{EN(ON)}$	Enable Voltage Threshold	V_{EN} rising until Output = ON	1.00 **0.90**	1.25	1.50 **1.55**	V
$V_{EN(HYS)}$	Enable Voltage Hysteresis	V_{EN} falling from $V_{EN(ON)}$ until Output = OFF	50 **30**	100	150 **200**	mV
t_{OFF}	Turn-OFF Delay Time	$R_{LOAD} \times C_{OUT} << t_{OFF}$	-	20	-	µs
t_{ON}	Turn-ON Delay Time	$R_{LOAD} \times C_{OUT} << t_{ON}$	-	15	-	
AC Parameters						
PSRR (V_{IN})	Ripple Rejection for V_{IN} Input Voltage	$V_{IN} = V_{OUT}$ +1V, f = 120 Hz	-	80	-	dB
		$V_{IN} = V_{OUT}$ + 1V, f = 1 kHz	-	65	-	
PSRR (V_{BIAS})	Ripple Rejection for V_{BIAS} Voltage	$V_{BIAS} = V_{OUT}$ + 3V, f = 120 Hz	-	58	-	dB
		$V_{BIAS} = V_{OUT}$ + 3V, f = 1 kHz	-	58	-	
e_n	Output Noise Density	f = 120 Hz	-	1	-	$\mu V/\sqrt{Hz}$
	Output Noise Voltage	BW = 10 Hz − 100 kHz	-	150	-	μV_{RMS}
		BW = 300 Hz − 300 kHz	-	90	-	
Thermal Parameters						
T_{SD}	Thermal Shutdown Junction Temperature		-	160	-	°C
$T_{SD(HYS)}$	Thermal Shutdown Hysteresis		-	10	-	
θ_{JA}	Thermal Resistance, Junction to Ambient(4)	TO-220-5	-	60	-	°C/W
		DDPAK/TO-263-5	-	60	-	
θ_{JC}	Thermal Resistance, Junction to Case(4)	TO-220-5	-	3	-	
		DDPAK/TO-263-5	-	3	-	

(4) Device power dissipation must be de-rated based on device power dissipation (T_D), ambient temperature (T_A), and package junction to ambient thermal resistance (θ_{JA}). Additional heat-sinking may be required to ensure that the device junction temperature (T_J) does not exceed the maximum operating rating. See the Application Information section for details.

Copyright © 2006–2013, Texas Instruments Incorporated

Typical Performance Characteristics

Unless otherwise specified: T_J = 25°C, V_{IN} = $V_{OUT(NOM)}$ + 1V, V_{BIAS} = 3.0V, I_{OUT} = 10 mA, C_{IN} = C_{OUT} = 10 µF Ceramic, C_{BIAS} = 1 µF Ceramic, V_{EN} = V_{BIAS}.

V_{BIAS} Ground Pin Current ($I_{GND(BIAS)}$) vs V_{BIAS}

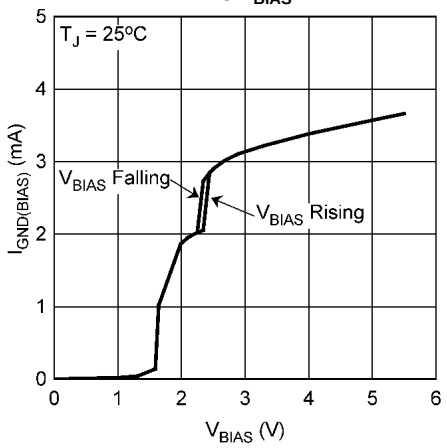


Figure 3.

V_{BIAS} Ground Pin Current ($I_{GND(BIAS)}$) vs Temperature

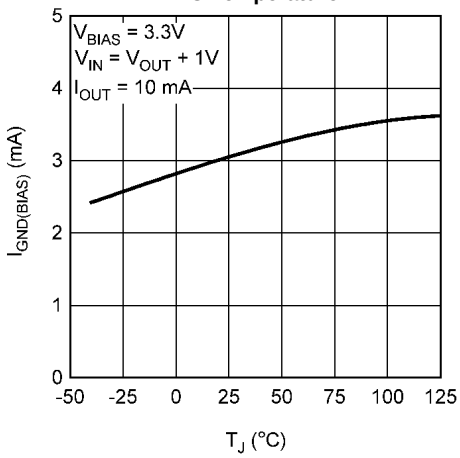


Figure 4.

V_{IN} Ground Pin Current ($I_{GND(IN)}$) vs Temperature

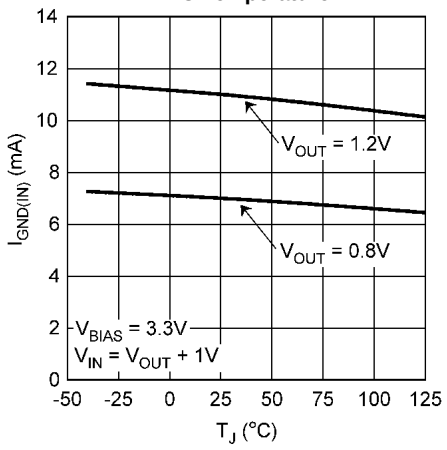


Figure 5.

Load Regulation vs Temperature

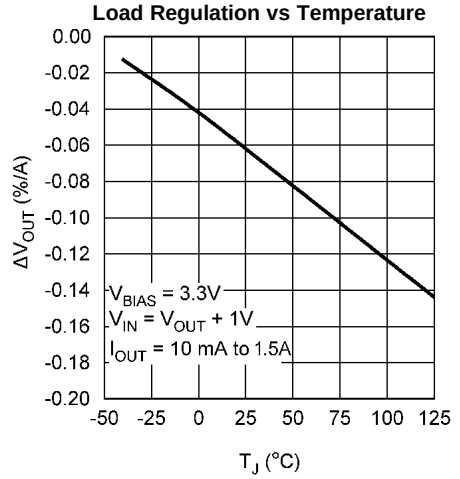


Figure 6.

Dropout Voltage (V_{DO}) vs Temperature

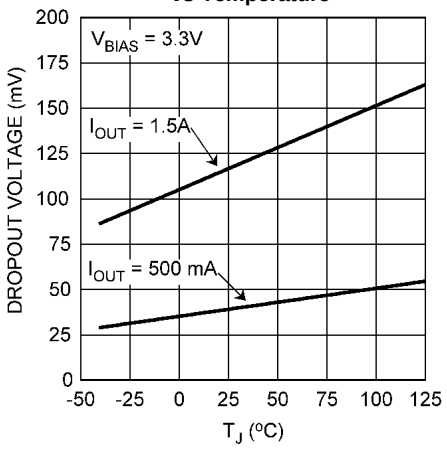


Figure 7.

Output Current Limit (I_{SC}) vs Temperature

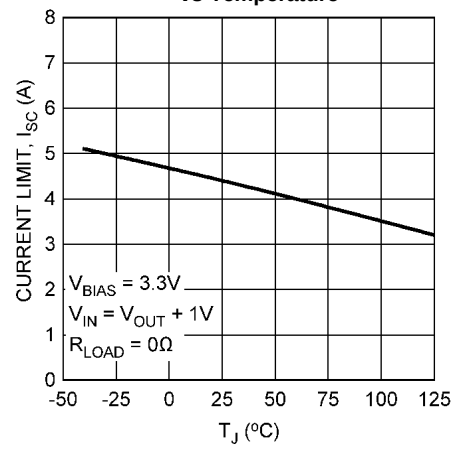


Figure 8.

Typical Performance Characteristics (continued)

Unless otherwise specified: T_J = 25°C, V_{IN} = $V_{OUT(NOM)}$ + 1V, V_{BIAS} = 3.0V, I_{OUT} = 10 mA, C_{IN} = C_{OUT} = 10 µF Ceramic, C_{BIAS} = 1 µF Ceramic, V_{EN} = V_{BIAS}.

V_{OUT} vs Temperature

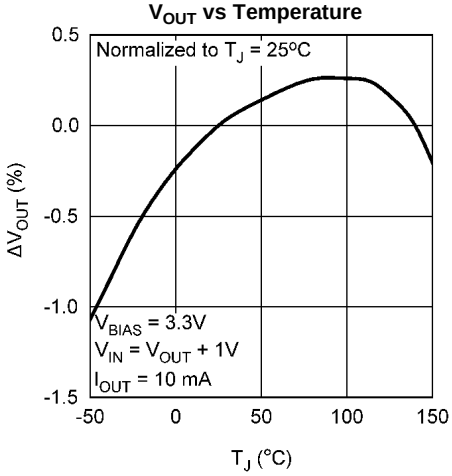


Figure 9.

UVLO Thresholds vs Temperature

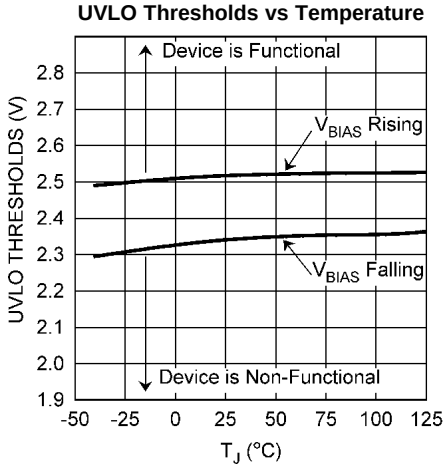


Figure 10.

Enable Thresholds (V_{EN}) vs Temperature

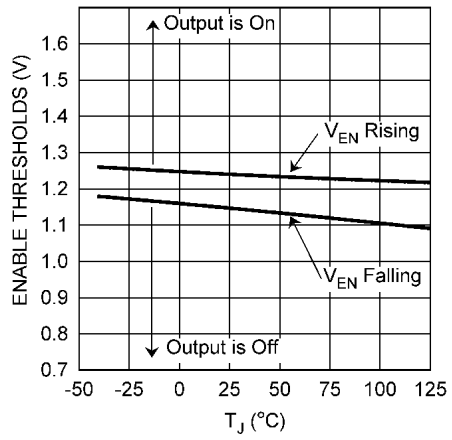


Figure 11.

Enable Pull-Down Current (I_{EN}) vs Temperature

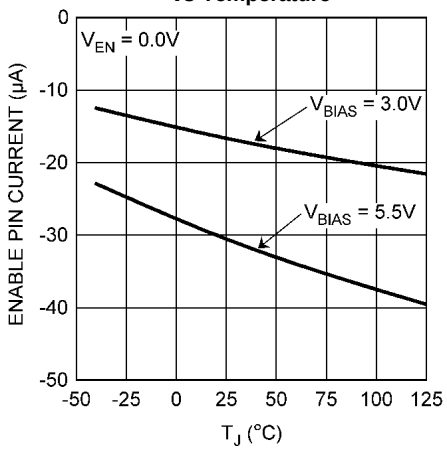


Figure 12.

Enable Pull-Up Resistor (r_{EN}) vs Temperature

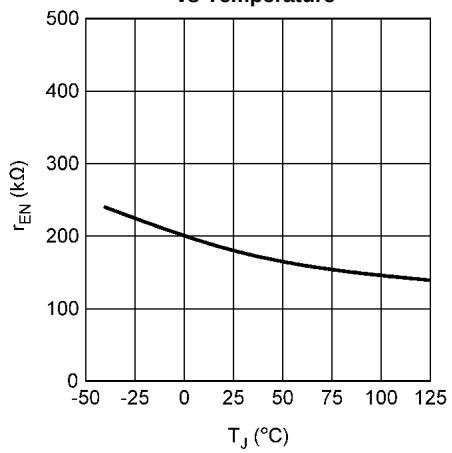


Figure 13.

V_{IN} Line Transient Response

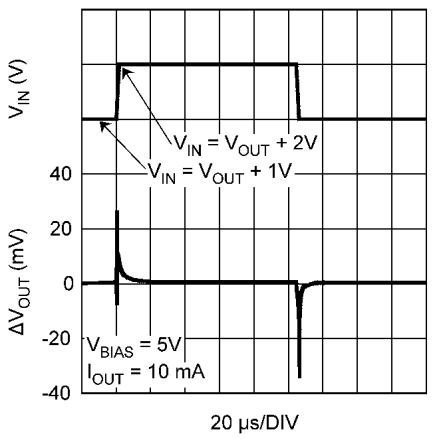


Figure 14.

Copyright © 2006–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise specified: T_J = 25°C, V_{IN} = $V_{OUT(NOM)}$ + 1V, V_{BIAS} = 3.0V, I_{OUT} = 10 mA, C_{IN} = C_{OUT} = 10 µF Ceramic, C_{BIAS} = 1 µF Ceramic, V_{EN} = V_{BIAS}.

V_{IN} Line Transient Response

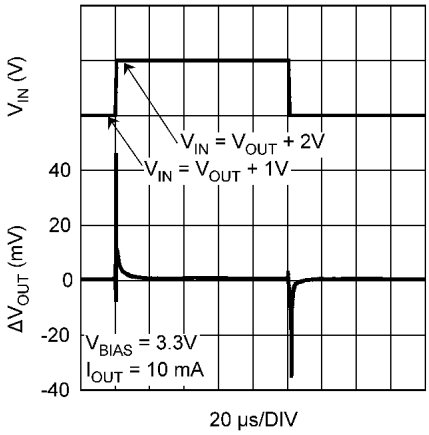


Figure 15.

V_{BIAS} Line Transient Response

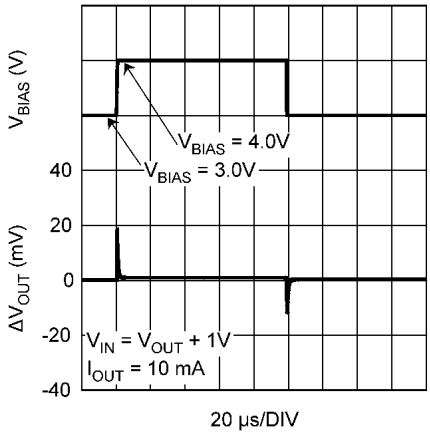


Figure 16.

V_{BIAS} Line Transient Response

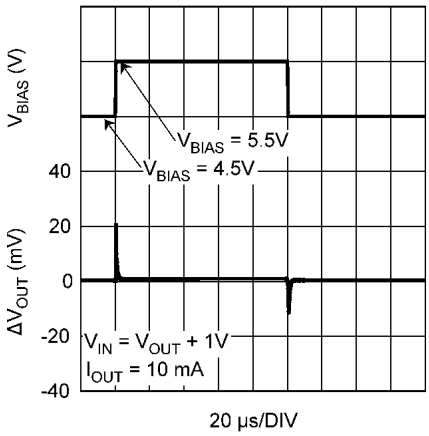


Figure 17.

Load Transient Response, C_{OUT} = 10 µF Ceramic

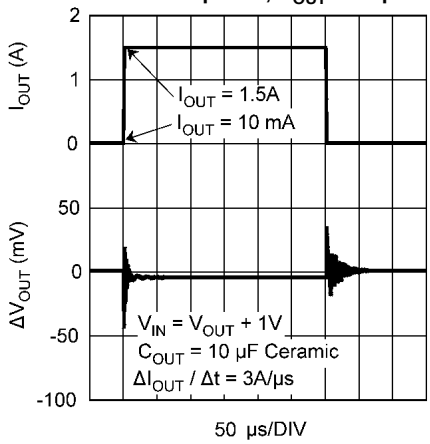


Figure 18.

Load Transient Respose, C_{OUT} = 10 µF Ceramic

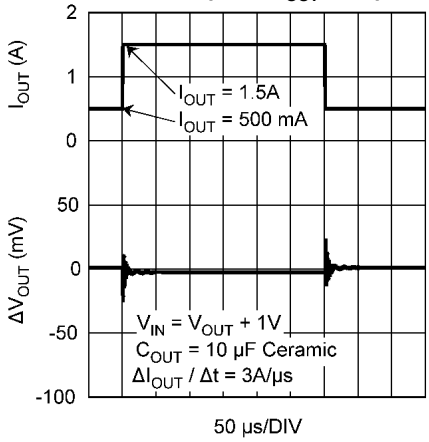


Figure 19.

Load Transient Response, C_{OUT} = 100 µF Ceramic

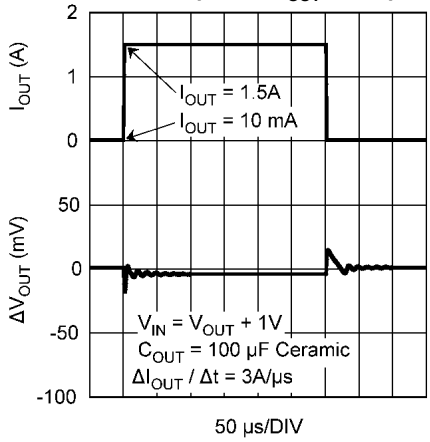


Figure 20.

Copyright © 2006–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise specified: T_J = 25°C, V_{IN} = $V_{OUT(NOM)}$ + 1V, V_{BIAS} = 3.0V, I_{OUT} = 10 mA, C_{IN} = C_{OUT} = 10 µF Ceramic, C_{BIAS} = 1 µF Ceramic, V_{EN} = V_{BIAS}.

Load Transient Response, C_{OUT} = 100 µF Ceramic

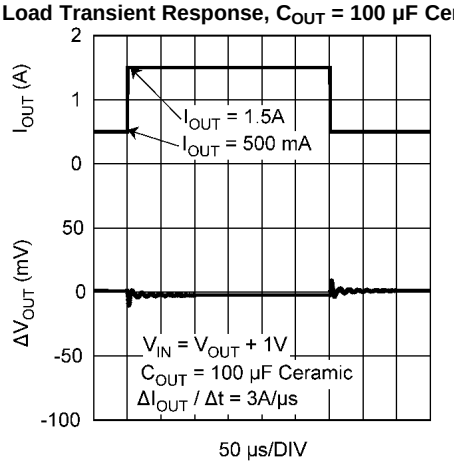


Figure 21.

Load Transient Response, C_{OUT} = 100 µF Tantalum

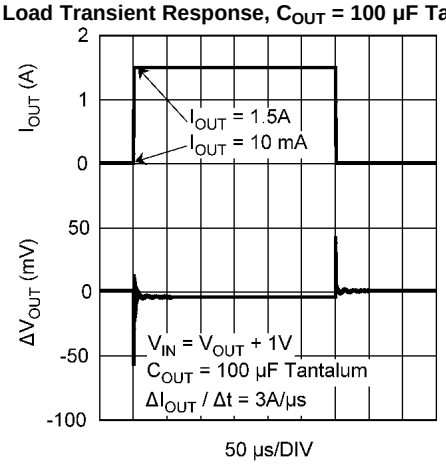


Figure 22.

Load Transient Response, C_{OUT} = 100 µF Tantalum

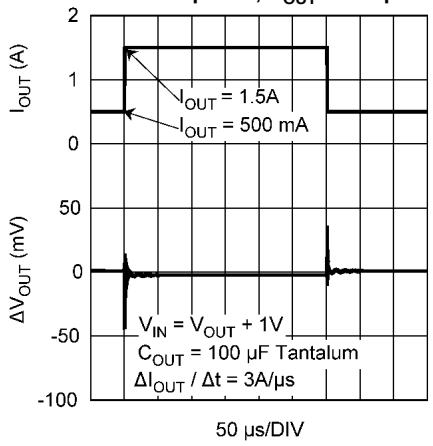


Figure 23.

V_{BIAS} PSRR

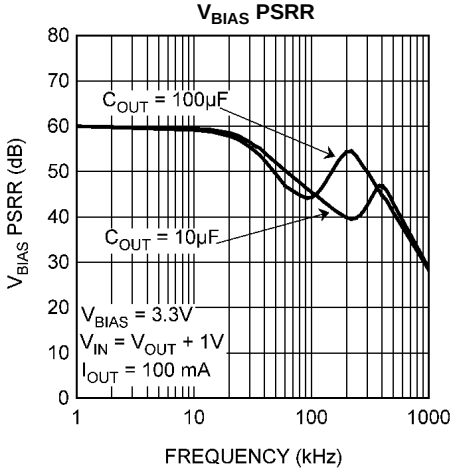


Figure 24.

V_{IN} PSRR

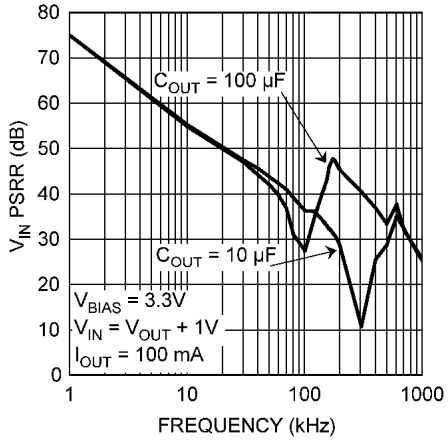


Figure 25.

Output Noise


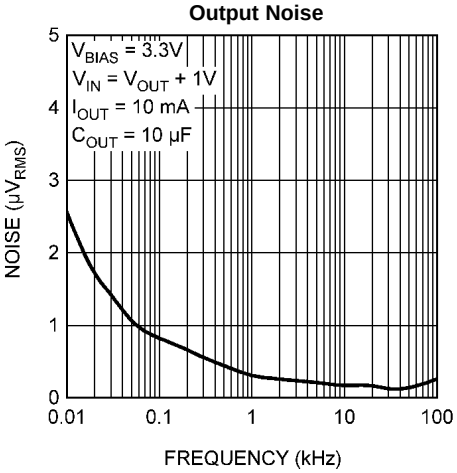


Figure 26.

Copyright © 2006–2013, Texas Instruments Incorporated

Block Diagram

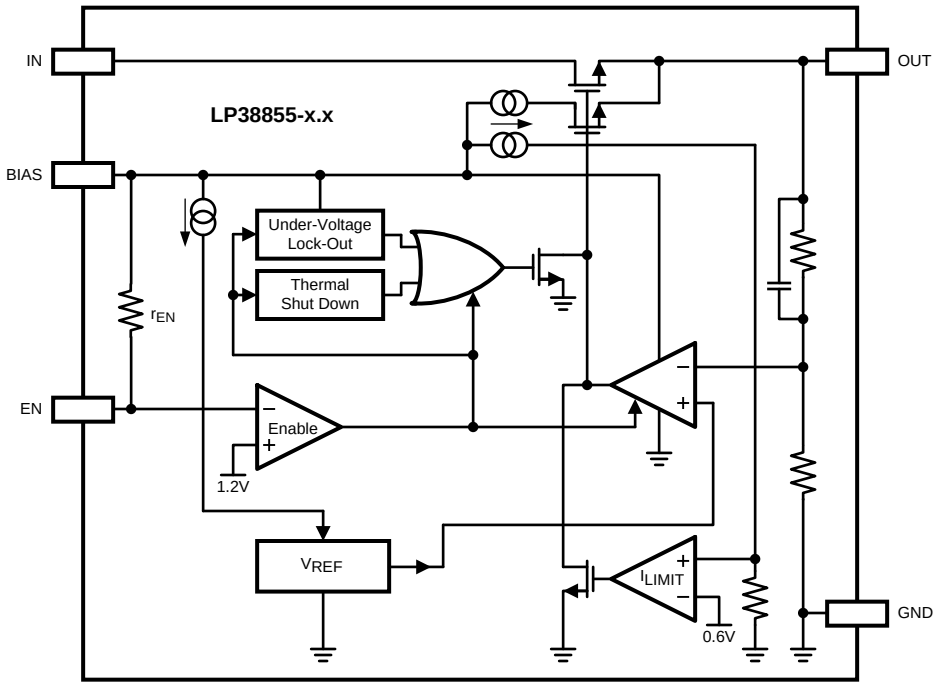

APPLICATION INFORMATION

EXTERNAL CAPACITORS

To assure regulator stability, capacitors are required on the input, output and bias pins as shown in the Typical Application Circuit.

Output Capacitor

A minimum output capacitance of 10 µF, ceramic, is required for stability. The amount of output capacitance can be increased without limit. The output capacitor must be located less than 1 cm from the output pin of the IC and returned to the device ground pin with a clean analog ground.

Only high quality ceramic types such as X5R or X7R should be used, as the Z5U and Y5F types do not provide sufficient capacitance over temperature.

Tantalum capacitors will also provide stable operation across the entire operating temperature range. However, the effects of ESR may provide variations in the output voltage during fast load transients. Using the minimum recommended 10 µF ceramic capacitor at the output will allow unlimited capacitance, Tantalum and/or Aluminum, to be added in parallel.

Input Capacitor

The input capacitor must be at least 10 µF, but can be increased without limit. It's purpose is to provide a low source impedance for the regulator input. A ceramic capacitor, X5R or X7R, is recommended.

Tantalum capacitors may also be used at the input pin. There is no specific ESR limitation on the input capacitor (the lower, the better).

Aluminum electrolytic capacitors can be used, but are not recommended as their ESR increases very quickly at cold temperatures. They are not recommended for any application where the ambient temperature falls below 0°C.

Copyright © 2006–2013, Texas Instruments Incorporated

Bias Capacitor

The capacitor on the bias pin must be at least 1 µF. It can be any good quality capacitor (ceramic is recommended).

INPUT VOLTAGE

The input voltage (V_{IN}) is the high current external voltage rail that will be regulated down to a lower voltage, which is applied to the load. The input voltage must be at least V_{OUT} + V_{DO}, and no higher than whatever value is used for V_{BIAS}.

BIAS VOLTAGE

The bias voltage (V_{BIAS}) is a low current external voltage rail required to bias the control circuitry and provide gate drive for the N-FET pass transistor. The bias voltage must be in the range of 3.0V to 5.5V to ensure proper operation of the device.

UNDER VOLTAGE LOCKOUT

The bias voltage is monitored by a circuit which prevents the device from functioning when the bias voltage is below the Under-Voltage Lock-Out (UVLO) threshold of approximately 2.45V.

As the bias voltage rises above the UVLO threshold the device control circuitry become active. There is approximately 150 mV of hysteresis built into the UVLO threshold to provide noise immunity.

When the bias voltage is between the UVLO threshold and the Minimum Operating Rating value of 3.0V the device will be functional, but the operating parameters will not be within the specified limits.

SUPPLY SEQUENCING

There is no requirement for the order that V_{IN} or V_{BIAS} are applied or removed. However, the output voltage cannot be ensured until both V_{IN} and V_{BIAS} are within the range of specified operating values.

If used in a dual-supply system where the regulator load is returned to a negative supply, the output pin must be diode clamped to ground. A Schottky diode is recommend for this diode clamp.

REVERSE VOLTAGE

A reverse voltage condition will exist when the voltage at the output pin is higher than the voltage at the input pin. Typically this will happen when V_{IN} is abruptly taken low and C_{OUT} continues to hold a sufficient charge such that the input to output voltage becomes reversed.

The NMOS pass element, by design, contains no body diode. This means that, as long as the gate of the pass element is not driven, there will not be any reverse current flow through the pass element during a reverse voltage event. The gate of the pass element is not driven when V_{BIAS} is below the UVLO threshold, or the EN pin is held low.

When V_{BIAS} is above the UVLO threshold, and the EN pin is above the $V_{EN(ON)}$ threshold, the control circuitry is active and will attempt to regulate the output voltage. Since the input voltage is less than the output voltage the control circuit will drive the gate of the pass element to the full V_{BIAS} potential when the output voltage begins to fall. In this condition, reverse current will flow from the output pin to the input pin, limited only by the $R_{DS(ON)}$ of the pass element and the output to input voltage differential. Discharging an output capacitor up to 1000 µF in this manner will not damage the device as the current will decay rapidly. However, continuous reverse current should be avoided.

Copyright © 2006–2013, Texas Instruments Incorporated

ENABLE OPERATION

The Enable pin (EN) provides a mechanism to enable, or disable, the regulator output stage. The Enable pin has an internal pull-up, through a typical 180 kΩ resistor, to V_{BIAS}.

If the Enable pin is actively driven, pulling the Enable pin above the V_{EN} threshold of 1.25V (typical) will turn the regulator output on, while pulling the Enable pin below the V_{EN} threshold will turn the regulator output off. There is approximately 100 mV of hysteresis built into the Enable threshold provide noise immunity.

If the Enable function is not needed this pin should be left open, or connected directly to V_{BIAS}. If the Enable pin is left open, stray capacitance on this pin must be minimized, otherwise the output turn-on will be delayed while the stray capacitance is charged through the internal resistance (r_{EN}).

POWER DISSIPATION AND HEAT-SINKING

A heat-sink may be required depending on the maximum power dissipation and maximum ambient temperature of the application. Under all possible conditions, the junction temperature must be within the range specified under operating conditions.

The total power dissipation of the device is the sum of three different points of dissipation in the device.

The first part is the power that is dissipated in the NMOS pass element, and can be determined with the formula:

$$P_{D(PASS)} = (V_{IN} - V_{OUT}) \times I_{OUT} \quad (1)$$

The second part is the power that is dissipated in the bias and control circuitry, and can be determined with the formula:

$$P_{D(BIAS)} = V_{BIAS} \times I_{GND(BIAS)}$$

where

- $I_{GND(BIAS)}$ is the portion of the operating ground current of the device that is related to V_{BIAS} (2)

The third part is the power that is dissipated in portions of the output stage circuitry, and can be determined with the formula:

$$P_{D(IN)} = V_{IN} \times I_{GND(IN)}$$

where

- $I_{GND(IN)}$ is the portion of the operating ground current of the device that is related to V_{IN} (3)

The total power dissipation is then:

$$P_D = P_{D(PASS)} + P_{D(BIAS)} + P_{D(IN)} \quad (4)$$

The maximum allowable junction temperature rise (ΔT_J) depends on the maximum anticipated ambient temperature ($T_{A(MAX)}$) for the application, and the maximum allowable operating junction temperature ($T_{J(MAX)}$):

$$\Delta T_J = T_{J(MAX)} - T_{A(MAX)} \quad (5)$$

The maximum allowable value for junction to ambient Thermal Resistance, θ_{JA}, can be calculated using the formula:

$$\theta_{JA} \leq \frac{\Delta T_J}{P_D} \quad (6)$$

Heat-Sinking the TO-220 Package

The TO-220 package has a θ_{JA} rating of 60°C/W, and a θ_{JC} rating of 3°C/W. These ratings are for the package only, no additional heat-sinking, and with no airflow.

The thermal resistance of a TO-220 package can be reduced by attaching it to a heat-sink or a copper plane on a PC board. If a copper plane is to be used, the values of θ_{JA} will be same as shown in next section for DDPAK/TO-263 package.

Copyright © 2006–2013, Texas Instruments Incorporated

The heat-sink to be used in the application should have a heat-sink to ambient thermal resistance, θ_{HA}:

$$\theta_{HA} \leq \theta_{JA} - (\theta_{CH} + \theta_{JC}) \quad (7)$$

where

- θ_{JA} is the required total thermal resistance from the junction to the ambient air
- θ_{CH} is the thermal resistance from the case to the surface of the heat sink
- θ_{JC} is the thermal resistance from the junction to the surface of the case

For this equation, θ_{JC} is about 3°C/W for a TO-220 package. The value for θ_{CH} depends on method of attachment, insulator, etc. θ_{CH} varies between 1.5°C/W to 2.5°C/W. Consult the heat-sink manufacturer datasheet for details and recommendations.

Heat-Sinking the DDPAK/TO-263 Package

The DDPAK/TO-263 package has a θ_{JA} rating of 60°C/W, and a θ_{JC} rating of 3°C/W. These ratings are for the package only, no additional heat-sinking, and with no airflow.

The DDPAK/TO-263 package uses the copper plane on the PCB as a heat-sink. The tab of this package is soldered to the copper plane for heat-sinking. The graph below shows a curve for the θ_{JA} of TO-263 package for different copper area sizes, using a typical PCB with 1 ounce copper and no solder mask over the copper area for heat-sinking.

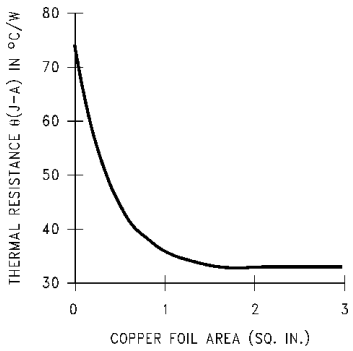


Figure 27. θ_{JA} vs Copper (1 Ounce) Area for the DDPAK/TO-263 package

As shown in Figure 27, increasing the copper area beyond 1 square inch produces very little improvement. The minimum value for θ_{JA} for the DDPAK/TO-263 package mounted to a PCB is 32°C/W.

Figure 28 shows the maximum allowable power dissipation for DDPAK/TO-263 packages for different ambient temperatures, assuming θ_{JA} is 35°C/W and the maximum junction temperature is 125°C.

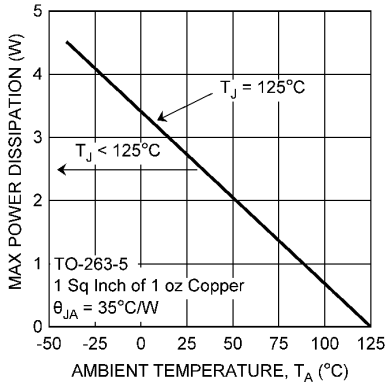


Figure 28. Maximum Power Dissipation vs Ambient Temperature for DDPAK/TO-263 Package

Copyright © 2006–2013, Texas Instruments Incorporated

REVISION HISTORY

Changes from Revision C (April 2013) to Revision D	Page
• Changed layout of National Data Sheet to TI format	12

Copyright © 2006–2013, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LP38855S-1.2/NOPB	Active	Production	DDPAK/ TO-263 (KTT) | 5	45 | TUBE	ROHS Exempt	SN	Level-3-245C-168 HR	-40 to 125	LP38855S -1.2
LP38855S-1.2/NOPB.A	Active	Production	DDPAK/ TO-263 (KTT) | 5	45 | TUBE	ROHS Exempt	SN	Level-3-245C-168 HR	-40 to 125	LP38855S -1.2
LP38855SX-1.2/NOPB	Active	Production	DDPAK/ TO-263 (KTT) | 5	500 | LARGE T&R	ROHS Exempt	SN	Level-3-245C-168 HR	-40 to 125	LP38855S -1.2
LP38855SX-1.2/NOPB.A	Active	Production	DDPAK/ TO-263 (KTT) | 5	500 | LARGE T&R	ROHS Exempt	SN	Level-3-245C-168 HR	-40 to 125	LP38855S -1.2
LP38855T-0.8/NOPB	Active	Production	TO-220 (NDH) | 5	45 | TUBE	Yes	SN	Level-1-NA-UNLIM	-40 to 125	LP38855T -0.8
LP38855T-0.8/NOPB.A	Active	Production	TO-220 (NDH) | 5	45 | TUBE	Yes	SN	Level-1-NA-UNLIM	-40 to 125	LP38855T -0.8
LP38855T-1.2/NOPB	Active	Production	TO-220 (NDH) | 5	45 | TUBE	Yes	SN	Level-1-NA-UNLIM	-40 to 125	LP38855T -1.2
LP38855T-1.2/NOPB.A	Active	Production	TO-220 (NDH) | 5	45 | TUBE	Yes	SN	Level-1-NA-UNLIM	-40 to 125	LP38855T -1.2

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

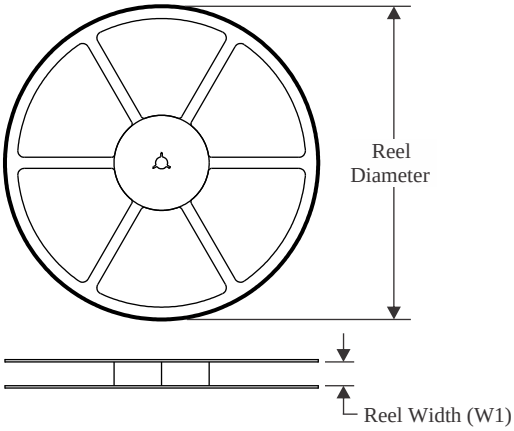


TAPE DIMENSIONS

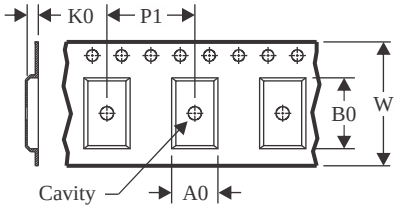

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

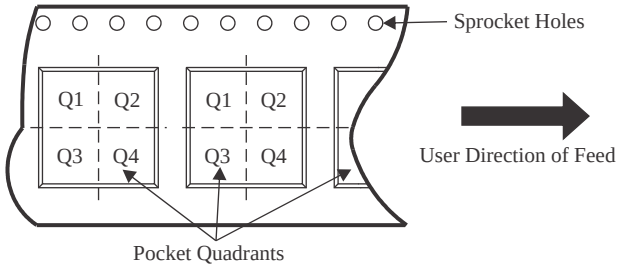

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LP38855SX-1.2/NOPB	DDPAK/ TO-263	KTT	5	500	330.0	24.4	10.75	14.85	5.0	16.0	24.0	Q2


TAPE AND REEL BOX DIMENSIONS

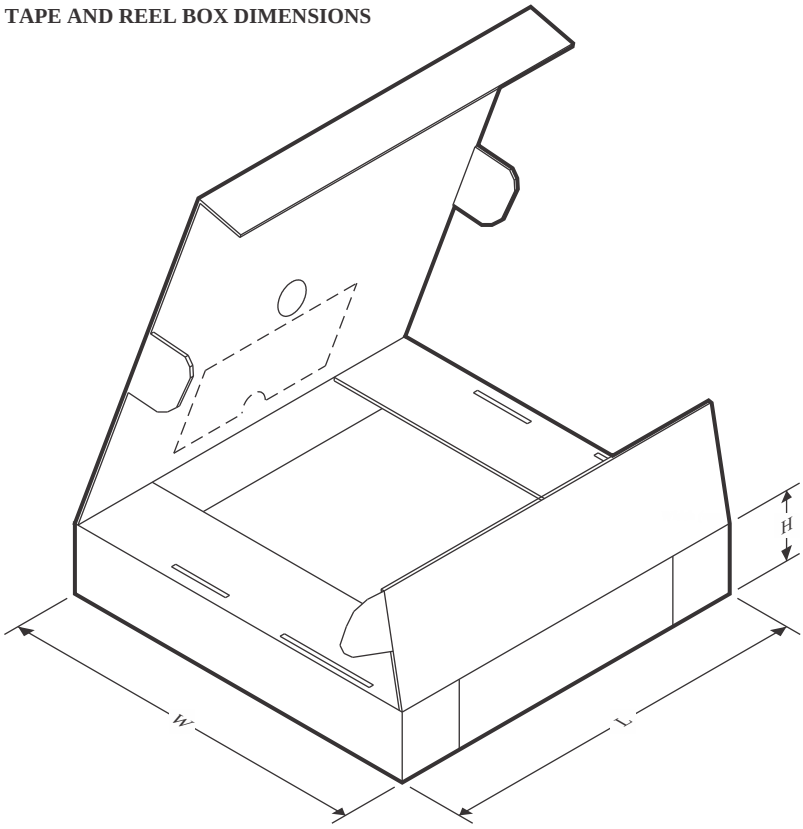

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LP38855SX-1.2/NOPB	DDPAK/TO-263	KTT	5	500	356.0	356.0	45.0


TUBE

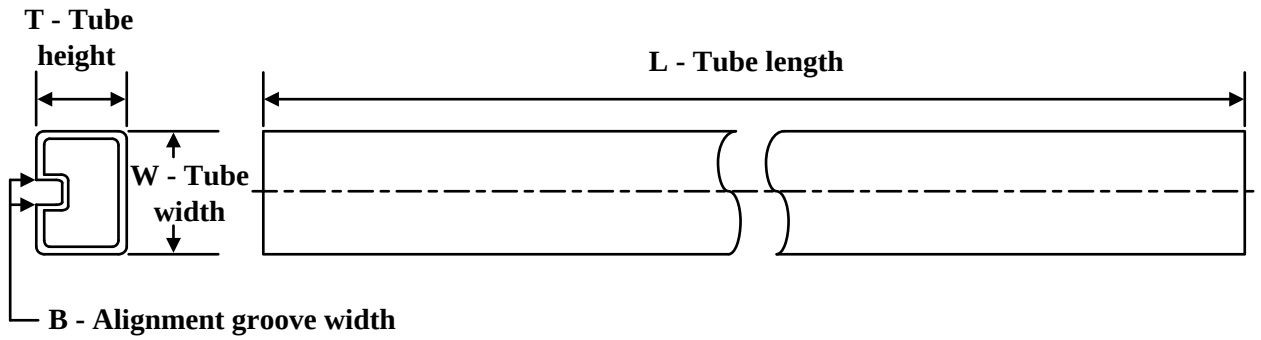


*All dimensions are nominal


Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
LP38855S-1.2/NOPB	KTT	TO-263	5	45	502	25	8204.2	9.19
LP38855S-1.2/NOPB.A	KTT	TO-263	5	45	502	25	8204.2	9.19
LP38855T-0.8/NOPB	NDH	TO-220	5	45	502	30	30048.2	10.74
LP38855T-0.8/NOPB.A	NDH	TO-220	5	45	502	30	30048.2	10.74
LP38855T-1.2/NOPB	NDH	TO-220	5	45	502	30	30048.2	10.74
LP38855T-1.2/NOPB.A	NDH	TO-220	5	45	502	30	30048.2	10.74


NDH0005D

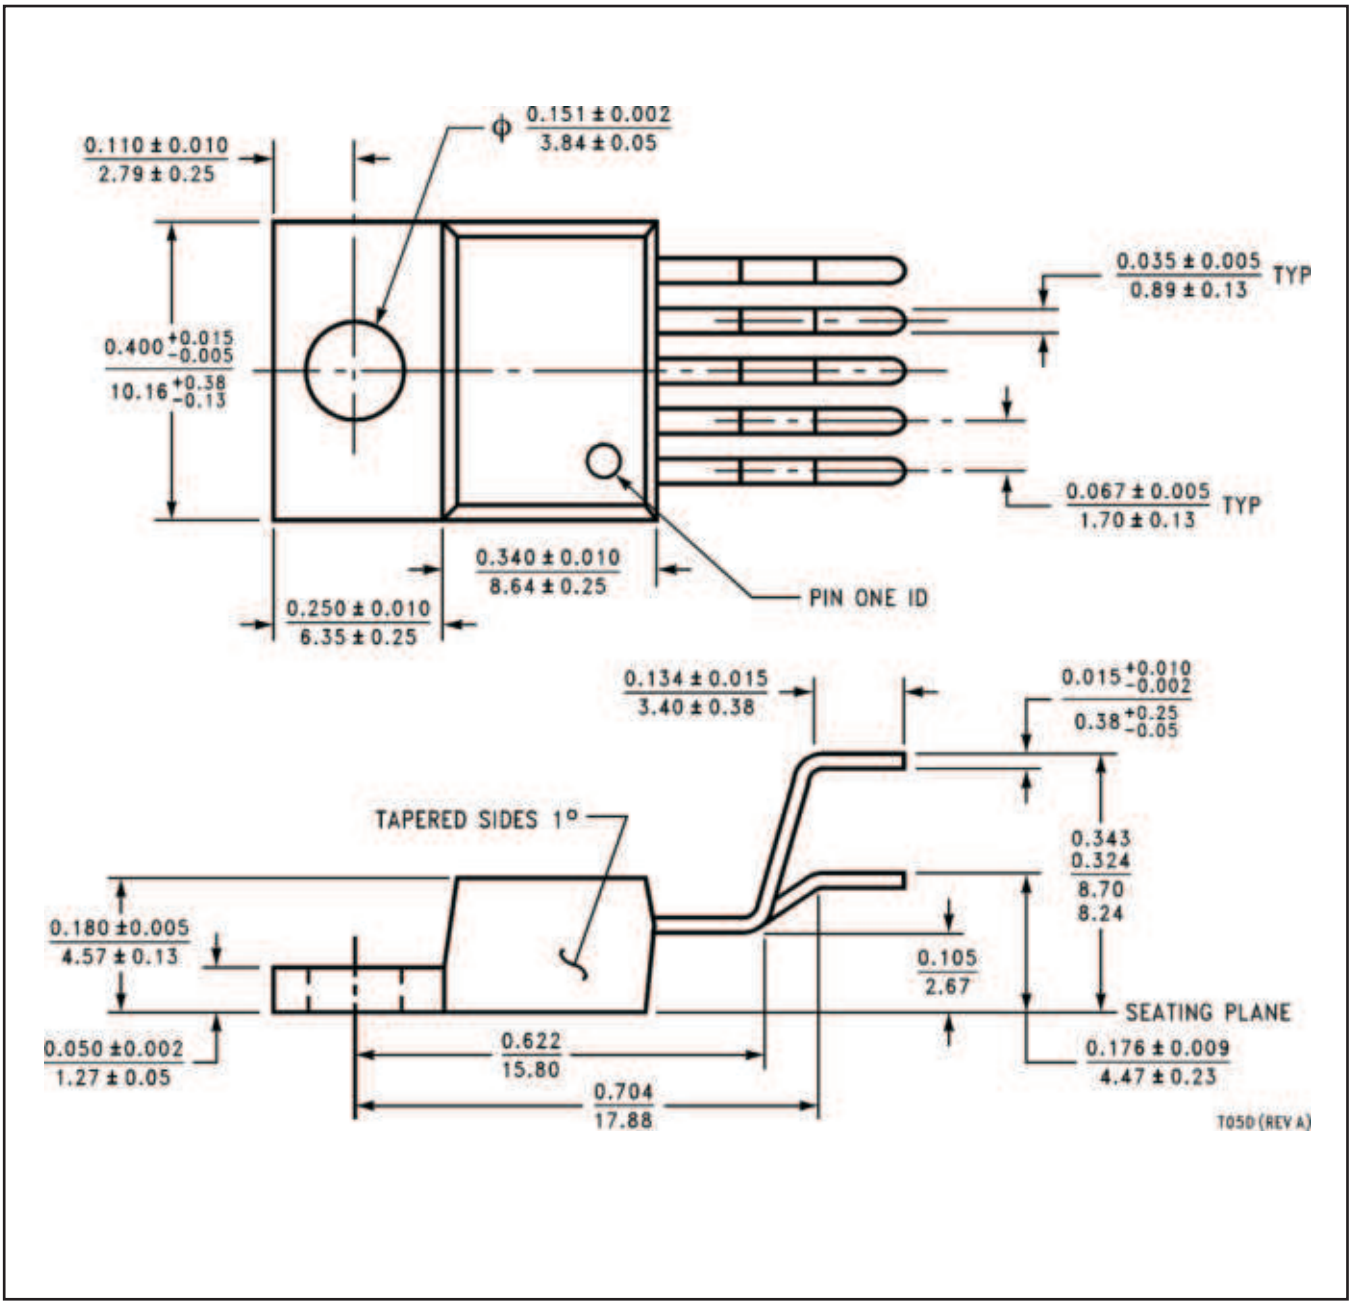
0.110 ± 0.010
2.79 ± 0.25
Φ 0.151 ± 0.002
3.84 ± 0.05
0.035 ± 0.005
0.89 ± 0.13 TYP
0.400 +0.015 −0.005
10.16 +0.38 −0.13
0.067 ± 0.005
1.70 ± 0.13 TYP
0.340 ± 0.010
8.64 ± 0.25
PIN ONE ID
0.250 ± 0.010
6.35 ± 0.25
0.134 ± 0.015
3.40 ± 0.38
0.015 +0.010 −0.002
0.38 +0.25 −0.05
TAPERED SIDES 1°
0.343
0.324
8.70
8.24
0.180 ±0.005
4.57 ± 0.13
0.105
2.67
SEATING PLANE
0.050 ±0.002
1.27 ± 0.05
0.622
15.80
0.176 ± 0.009
4.47 ± 0.23
0.704
17.88
T05D (REV A)


KTT0005B

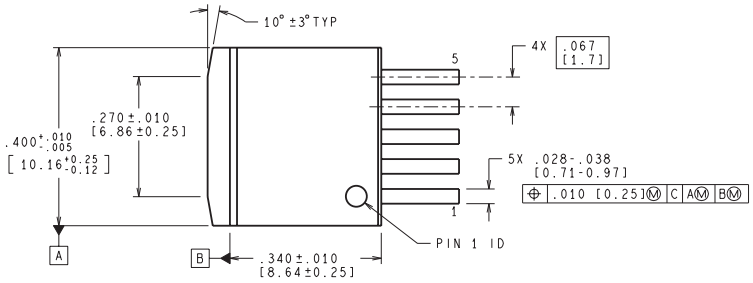

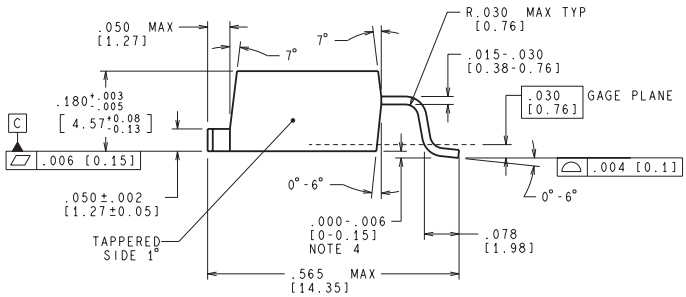

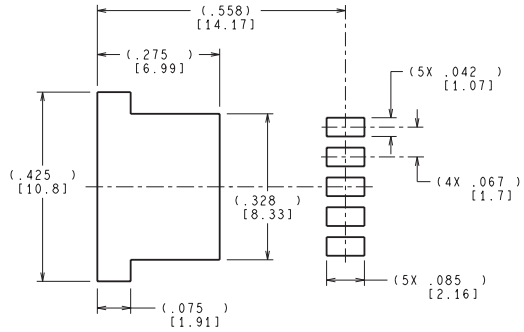

LAND PATTERN RECOMMENDATION

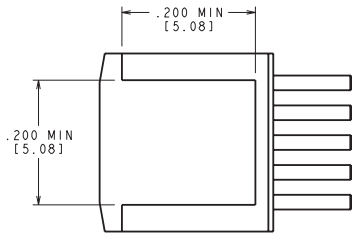

BOTTOM SIDE OF PACKAGE

CONTROLLING DIMENSION IS INCH
VALUES IN [ ] ARE MILLIMETERS
DIMENSIONS IN ( ) FOR REFERENCE ONLY

TS5B (Rev D)

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025