
samtec

ACCLIMATE™

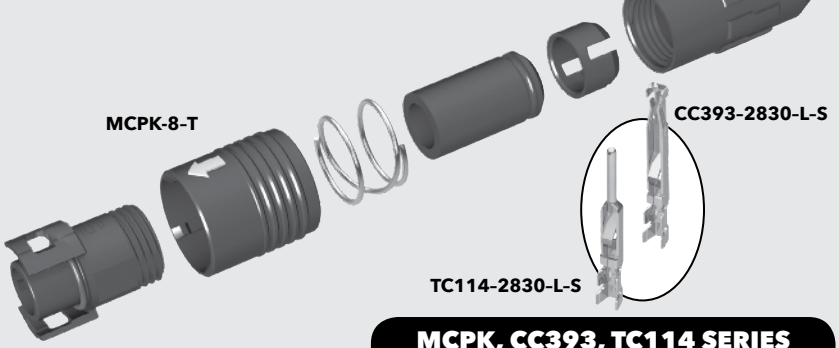

MCPK, CC393, TC114 SERIES

8 SERIES IP67 FIELD TERMINATION KIT

Mates with:
MCR(K), MCP(K)

SPECIFICATIONS

For complete specifications see www.samtec.com?MCPK

Insulator Material:
PPS
Terminal Material:
Phosphor Bronze
Contact Material:
Phosphor Bronze
Operating Temp Range:
-20 °C to +80 °C
Gasket Material:
Silicone
Spring Material:
Stainless Steel
Coupling Ring Spacer:
PBT
Cable Clamp:
POM
RoHS Compliant:
Yes

DUST CAPS


- -S (Socket) = DCA-MCR-8
- -T (Terminal) = DCA-MCP-8

Visit sealedio.samtec.com for a complete list of sealed systems


Note: Samtec's MCPK Series is dual sourced by Hirose Electric Co., LTD.

MCPK - 8 - GENDER

-T = Terminal (12 positions)
-S = Socket (12 positions)

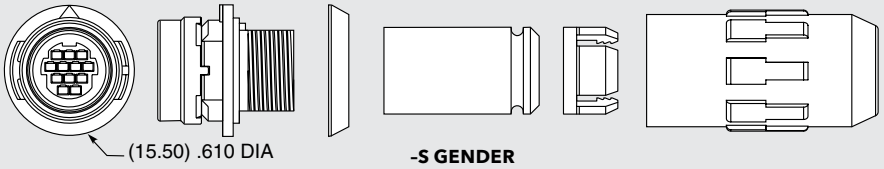

-S GENDER

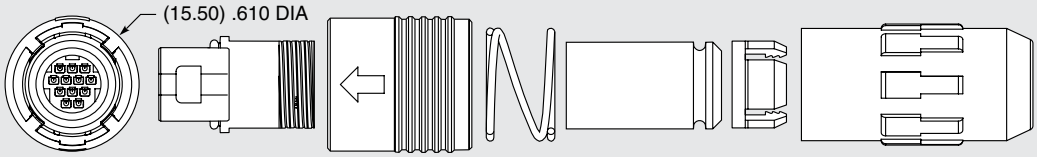

-T GENDER

SPECIFICATIONS

For complete specifications see www.samtec.com?CC393 or www.samtec.com?TC114

Plating:
10 µ" (0.25 µm) Gold on contact

TOOLING

- Hand Tool: CAT-HT-393-2430-13
- Mini Applicator (28-30 AWG): CAT-MC-393-2830-XX-01
- Extraction Tool: CAT-EX-MCX-8-01

TYPE - LEAD STYLE - L - PACKING OPTION


CC393
= Contact
TC114
= Terminal

-2830
= 28 to 30 AWG


-S
= Strip
(15 contacts or terminals)

-M
= Mini Reel
(1,000 - 5,000 contacts or terminals)

-R
= Reel
(30,000 contacts or terminals)

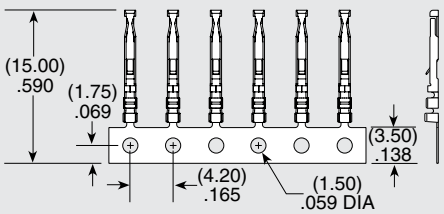

-CC393

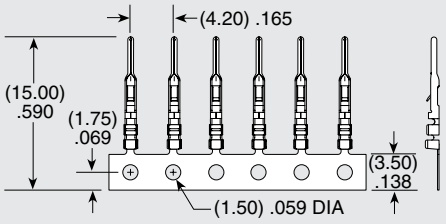

-TC114

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.