

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.


* UNLESS OTHERWISE SPECIFIED TOLERANCES
ON DECIMAL IS: ANGLE ± 1°
UNIT: MM

BACKSHELL KIT INCLUDES:

(2)BACKSHELL HALVES
(2)STRAIN RELIEF CLAMPS
(2)STRAIN RELIEF SCREWS
(2)MOUNTING SCREWS
(2)THUMBSCREWS
(1)GORMMET
(1)GORMMET SET

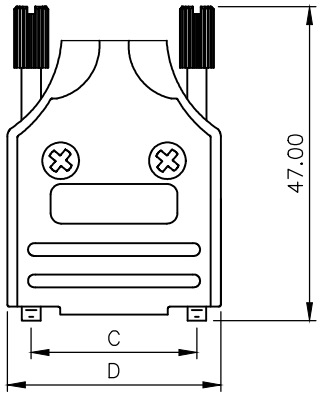

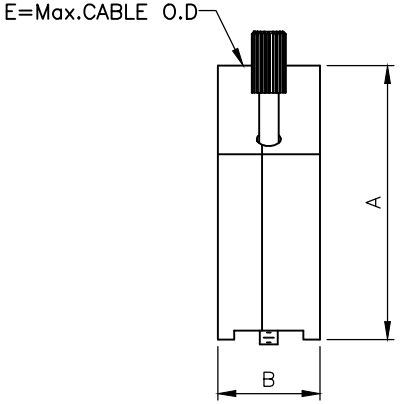

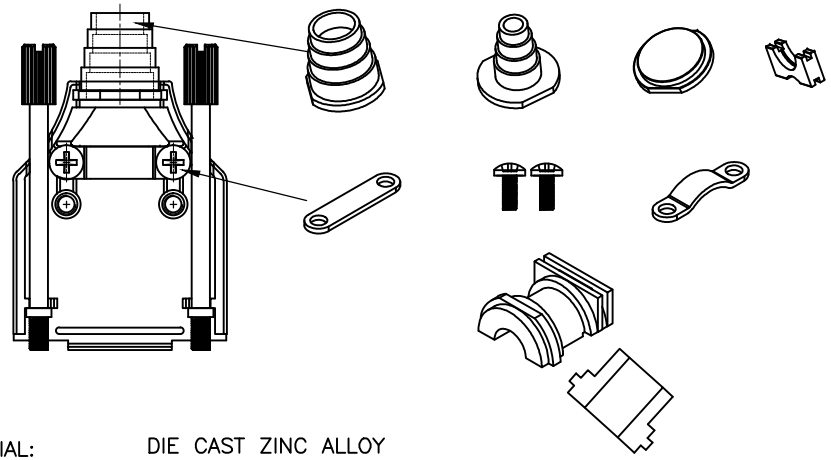

DIMENSIONS(mm/in)					
SIZE	A ±.30 ±.012	B ±.50 ±.020	C ±.25 ±.010	D ±1.3 ±.051	E
9	41.3	15.4	24.99	32.2	13.0
	1.626	0.606	0.984	1.268	0.512
15	43.3	15.4	33.32	40.6	13.0
	1.705	0.606	1.312	1.598	0.512
25	49.5	15.4	47.04	54.5	13.0
	1.949	0.606	1.852	2.146	0.512
37	54.3	15.4	63.50	70.7	13.0
	2.138	0.606	2.500	2.783	0.512

ORDERING INFORMATON:

SIZE	P/N – KITTED	PRODUCT CODE
9–WAY	6560–0137–01	MHEE–9–K
15–WAY	6560–0137–02	MHEE–15–K
25–WAY	6560–0137–03	MHEE–25–K
37–WAY	6560–0137–04	MHEE–37–K

BACKSHELL: MATERIAL:	DIE CAST ZINC ALLOY
PLATING:	NICKEL PLATED
COMPRESSION INSERT:	ABS–UL RECOGNIZED
4–40 THUMBSCREWS:	STEEL–Zn PLATED
HOUSING SCREWS:	STEEL–Zn PLATED
STRAIN RELIEF CLAMP:	STEEL–NICKEL PLATED
STRAIN RELIEF SCREWS:	STEEL–Zn PLATED
OPERATING TEMP:	–40°C TO+120°C

RoHS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MH CONNECTORS AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN	DATE
Johnny	11–24–15
APPROVED	DATE
Victor Lin	11–24–15

MH CONNECTORS

MH CONNECTORS , DIVISION OF EDAC

SCALE	SHEET OF	REV:
1 : 1	1 OF 1	8.0

DRAWING No
MHEEXX–K