



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/09	
A		ADDED DRAWING	12/25/18	AY/RC1






60, 64 PIN

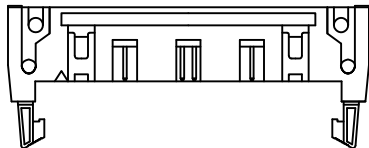


20, 24, 26, 30, 34, 40, 50 PIN



10, 14, 16 PIN

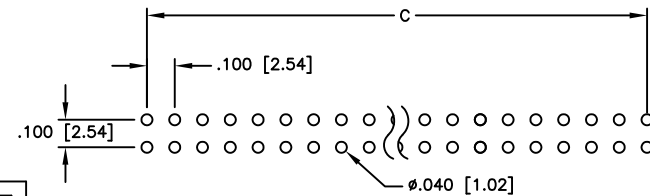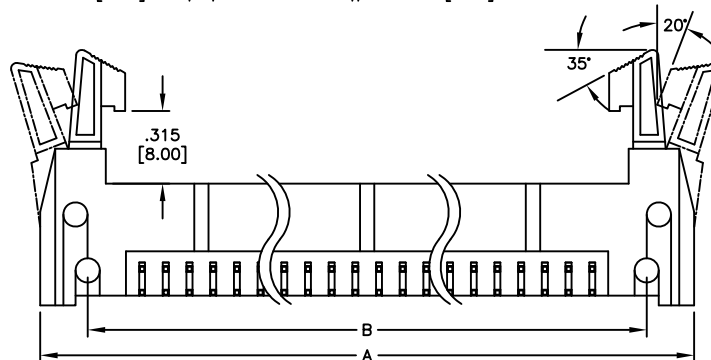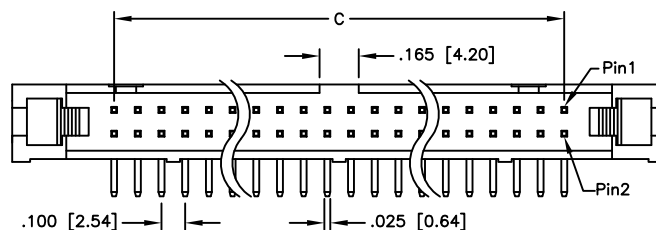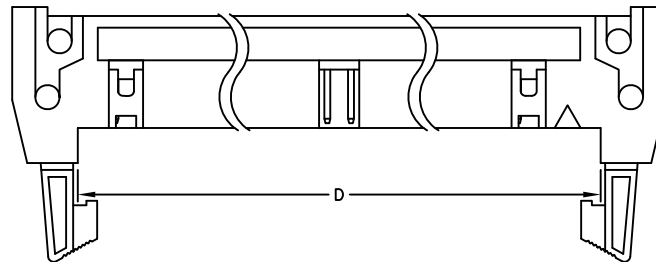

RECOMMENDED PCB LAYOUT



SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0, Color: Black
 Contacts: Brass
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 1 Amp
 Contact Resistance: 10 mohm max
 Insulation resistance: 1000 Mohm min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64
 A = .100 [2.54] x No. of Spaces + .855 [21.71]
 B = .100 [2.54] x No. of Spaces + .454 [11.54]
 C = .100 [2.54] x No. of Spaces
 D = .100 [2.54] x No. of Spaces + .305 [7.74]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES		TITLE LATCH BOX HEADER, RIGHT ANGLE LONG EJECTOR LATCHES	
APPROVALS		DATE 12/10/09	
DRAWN DY		SIZE X	PART NO. MHR-XX-HUAL
CHECKED		REV.P A	
APPROVED		REF: S00059T	SCALE: NTS
		SHEET 1 OF 1	