
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REVISED SHAPE	3/20/08	
B		REDRAWING	4/02/08	

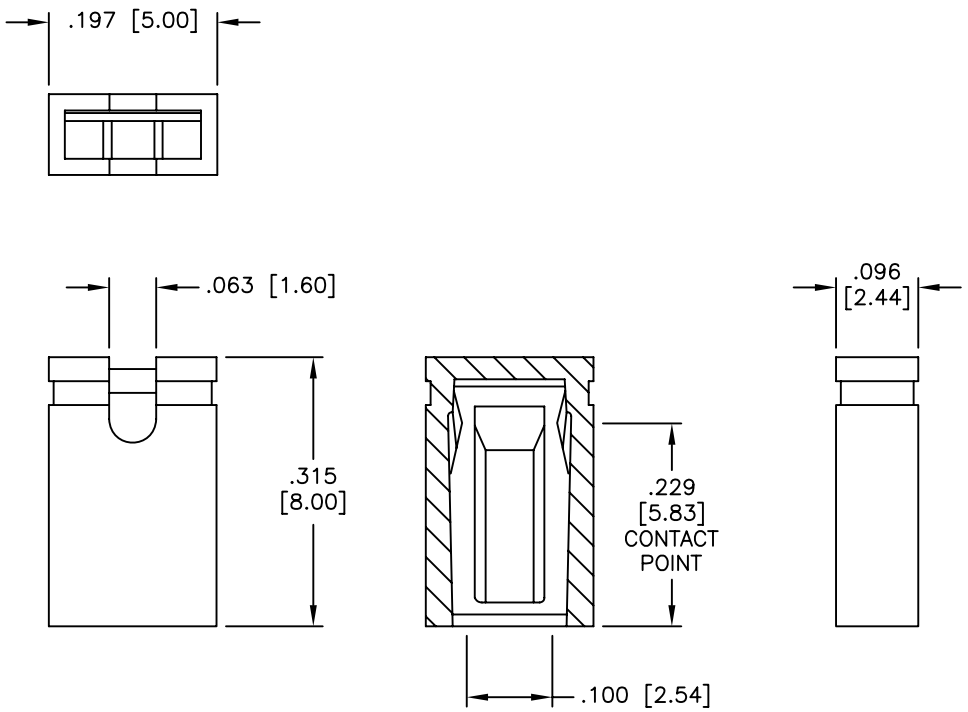

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
G = Gold flash over Nickel underplate overall
T = Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amp max
Contact resistance: 30 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 650 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	4/6/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] MINI SHUNT, OPEN TOP
.315 [8.00] HEIGHT

SIZE	PART NO.	REV.
X	MSDB-X	B

REF: | SCALE: NTS | SHEET 1 OF 1