

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/8/05	
A		REVISED SPEC.	11/18/10	
B		REDRAWN	2/20/13	

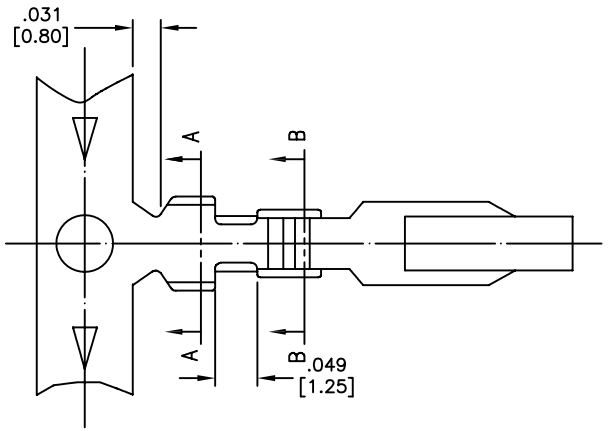





SECTION A–A



SECTION B–B

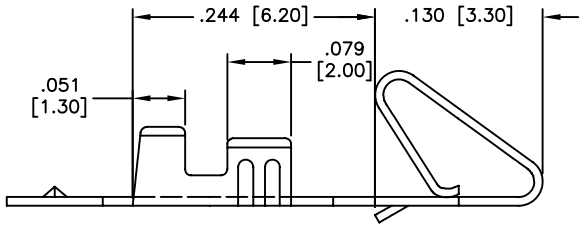

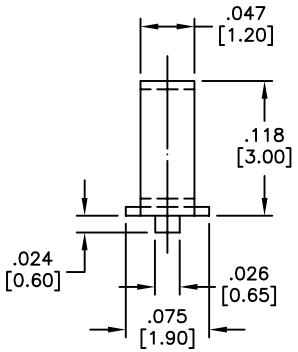

SPECIFICATIONS:
Material:
Contact: Brass, Tin plated
Electrical:
Operating voltage: 250 V AC/DC
Current rating: 3 A AC/DC
Contact resistance: 20 mohms max
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Thickness: 0.2mm
Wire Range: AWG#22~#28
Insulation O.D: 1.5mm
Temperature Rating:
Operating temperature: −25°C to +85°C
Packaging:
B = loose cut
R = tape and reel
Packaging:
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	4/8/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CRIMP CONTACT

SIZE	PART NO.	REV.
X	MTA-C-X	B

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1