

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/26/06	
A		REDRAWN	11/26/10	
B		UPDATED BORDER	12/20/19	SS



PART NUMBER	WIRE SIZE	INSULATOR COLOR	CONTACT RESISTANCE
MTD-A-XX-C-1	22 AWG	RED	10mΩ Max.
MTD-A-XX-D-1	24 AWG	WHITE	15mΩ Max.
MTD-A-XX-E-1	26 AWG	BLUE	20mΩ Max.
MTD-A-XX-F-1	28 AWG	GREEN	30mΩ Max.

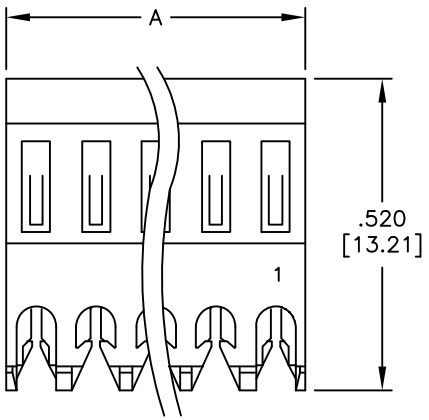

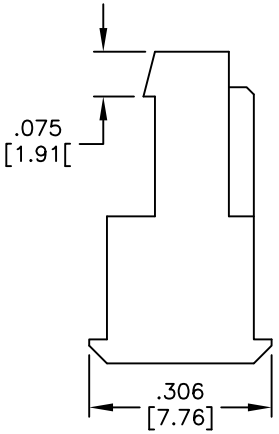

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250V AC/DC max.
Current rating: 3 Amps max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 24
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	7/26/06
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
IDC MASS TERMINATION HOUSING
.100 [2.54] SPACING, FEED THRU

SIZE	PART NO.	REV.
X	MTD-A-XX-X-1	B

REF: S00004T | SCALE: NTS | SHEET 1 OF 1