


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/4/04	
A		UPDATE DRAWING	11/30/17	AY/SL

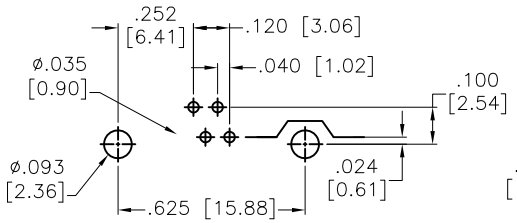

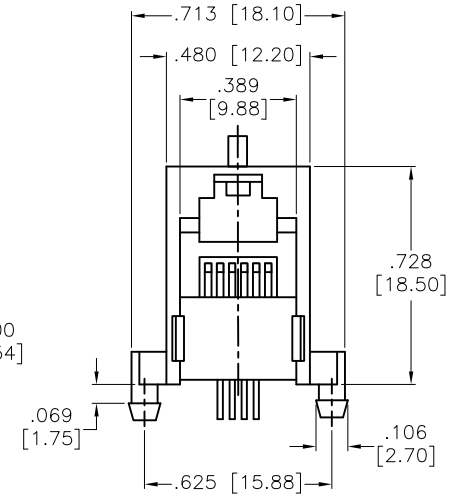

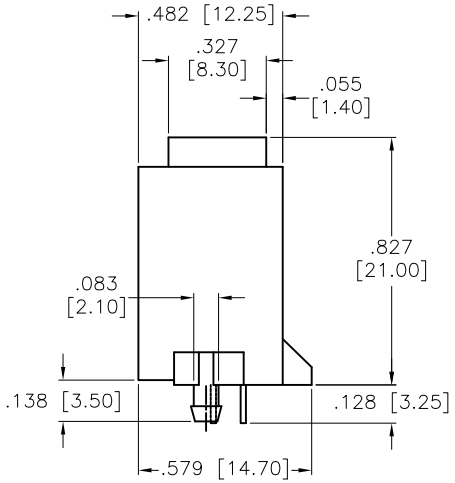

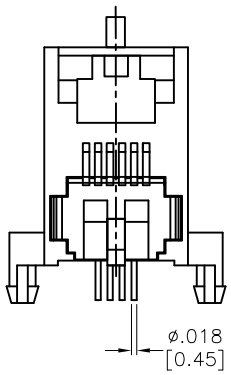

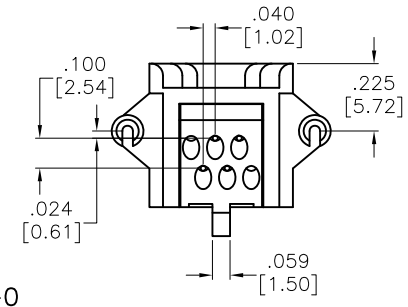

SPECIFICATIONS:

Material:

Insulator: PBT, Glass Fiber, rated UL 94V–0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate overall

Electrical:

Voltage Rating: 150 VAC max

Current rating: 1.5 Amps max

Contact Resistance: 20 mohms max.

Insulation resistance: 500 Mohms min @500 VDC

Dielectric withstanding voltage: 1000 Vrms for 1 minut

Temperature Rating:

Operating temperature: –40°C to +85°C

Environmental:

Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	10/4/04
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK, 6P4C
RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	MTJ-647X1	A

REF:	SCALE:	SHEET
S00065T	NTS	1 OF 1