


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/22/16	
A		UPDATE SPEC.	4/15/20	AY/RC

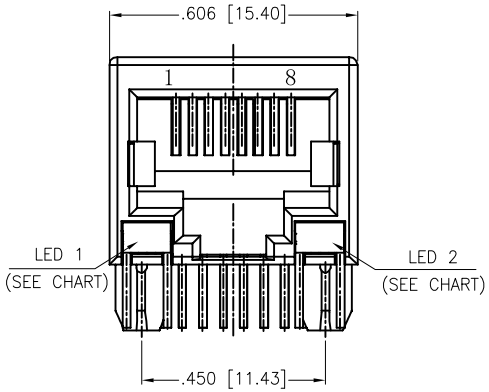

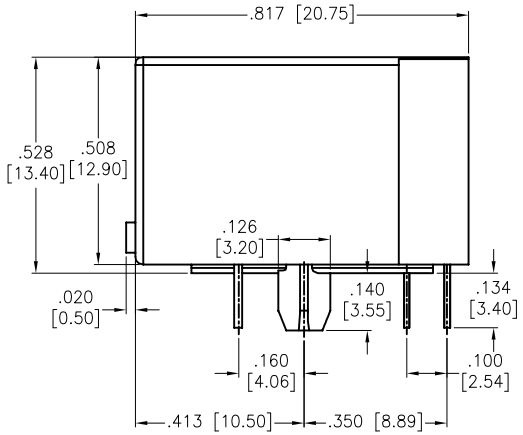

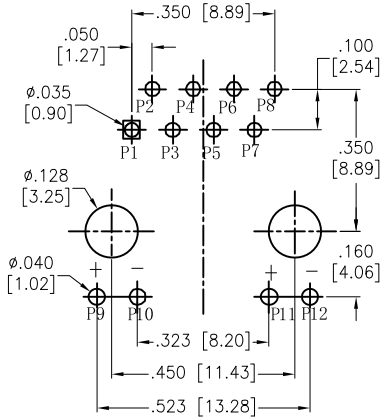

RECOMMENDED PCB LAYOUT

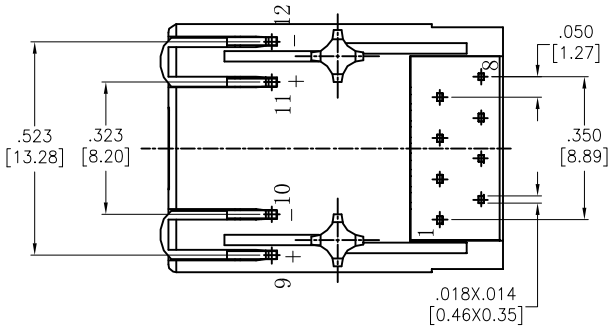

SPECIFICATIONS:

Material:

Insulator: PBT, glass filled, rated UL 94V–0

Insulator color: Black

Contacts: Phosphor Bronze

Shield: Brass, Nickel plated

Contact Plating:

Round contact

Gold over Nickel underplate overall

Flat contact

Gold over Nickel underplate on contact area

Matte Tin over Nickel underplate on solder tails

Electrical:

Voltage rating: 150 VAC RMS

Current rating: 1.5 Amp

Contact Resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Dielectric withstanding voltage:

Contact to Contact: 1,000 VDC or AC Peak for 1 minute

Contact to Screen and Test panel: 1,500 VDC or AC Peak for 1 minute

Temperature Rating:

Operating temperature: –40°C to +85°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

Part Number	LED 1 Color	LED 2 Color
MTJ-88TX1-LD	Green	Green
MTJ-88TX1-LG	Yellow	Green
MTJ-88TX1-LH	Green	Yellow
MTJ-88TX1-LP	Yellow/Green	Yellow/Green
MTJ-88TX1-LV	Green	Yellow/Green
MTJ-88TX1-L16	Green/Yellow	Green/Yellow

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	9/22/16
CHECKED	CH	9/22/16
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: MODULAR JACK GANGED, 1 PORT, 8P8C W/ LED'S

SIZE	PART NO.	REV.
X	MTJ-88TX1-LX	A

REF: S00005C | SCALE: NTS | SHEET 1 OF 1