NLAS2750

Low Voltage Dual SPDT Analog Switch with Negative Swing Audio Capability

The NLAS2750 is a dual SPDT low on−resistance analog switch. It can operate from a single 1.8 V to 5.0 V power supply. It is a bi−directional switch that can switch a negative voltage swing audio signal without requiring a coupling capacitor. With a single power supply, the audio signal can swing over the range from −2.5 V to V_{CC}.

Features

- Capable to Switch Negative Swing Audio Signals Without Requiring a DC Blocking Capacitor
- Low On−resistance (R_{ON})
- Low Voltage Digital Control Logic: (V_{INH} = 1.4 V @ V_{CC} = 2.7 V to 4.3 V)
- Low Power Consumption ($I_{CC} \leq$ 250 nA)
- Space Saving 1.4 mm x 1.8 mm Package UQFN Package
- This is a Pb−Free Device


Typical Applications

- Cellular Phones
- Portable Media Players

ON Semiconductor®

www.onsemi.com

MARKING DIAGRAM




UQFN10
CASE 488AT



AL = Specific Device Code
M = Date Code/Assembly Location
▪ = Pb−Free Device

(Note: Microdot may be in either location)

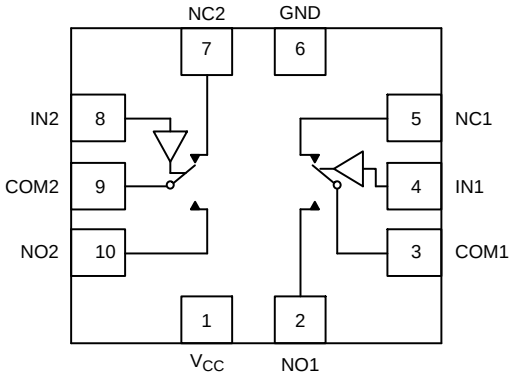

FUNCTION TABLE

IN1 (Pin 4)	IN2 (Pin 8)	Function
0	X	COM1 = NC1
1	X	COM1 = NO1
X	0	COM2 = NC2
X	1	COM2 = NO2

ORDERING INFORMATION

See detailed ordering and shipping information on page 7 of this data sheet.

© Semiconductor Components Industries, LLC, 2015

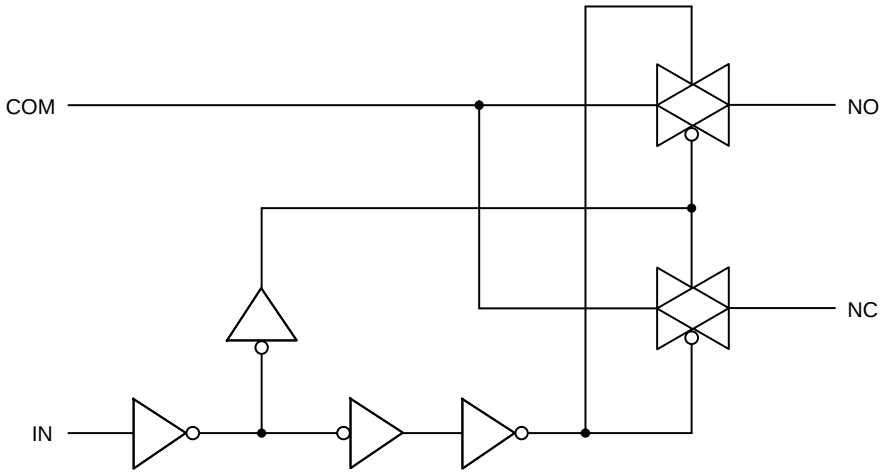


Figure 1. Logic Equivalent Circuit

MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	Positive DC Supply Voltage	−0.3 to +6.5	V
V_{IS}	Analog Input Voltage (COM, NO, NC) (Notes 1 and 2)	Min. $V_{IS} = V_{CC}$ − 6.5 V or −2.5 V (whichever is greater) Max. $V_{IS} = V_{CC}$ + 0.3 V	V
V_{IN}	Digital (IN1, IN2)	−0.3 to +6.5	V
I_{CC}	Current (GND, V_{CC})	50	mA
I_{IS}	Continuous Switch Current (COM, NO, NC) (Note 1)	±250	mA
I_{ISP}	Peak Switch Current (Pulsed at 1 ms, 10% Duty Cycle)	±500	mA
T_{STG}	Storage Temperature	−65 to +150	°C
P_D	Power Dissipation	200	mW
V_{ESD}	ESD (Human Body Model) All pins I/O to GND	 6 8	kV
I_{LU}	Latch−up (per JESD78)	300	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Signals on COM, NO, NC, exceeding V_{CC} will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
2. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum is used in this data sheet.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
V_{CC}	Power Supply Range	1.8	5.5	V
V_{IN}	Digital Select Input Voltage Overvoltage Tolerance (OVT) (IN1, IN2)	GND	5.5	V
V_{IS}	Analog Input Voltage (NC, NO, COM) (Note 3)	−2.5	V_{CC}	V
T_A	Operating Temperature Range	−40	+85	°C
t_r, t_f	Input Rise or Fall Time (IN1, IN2) V_{CC} < 2.7 V V_{CC} ≥ 2.7 V		 20 10	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

3. The voltage across the switch should be ≤ 5.5 V.

ELECTRICAL CHARACTERISTICS (V_{CC} = 2.7 V, ±10%) (Note 4)

Symbol	Parameter	Test Conditions	Guaranteed Maximum Limit −40°C to 85°C Min	Typ	Max	Unit
ANALOG SWITCH						
V_{IS}	Analog Signal Range (Note 5)		−2.5		V_{CC}	V
$R_{DS(on)}$	On−Resistance	V_{CC} = 2.7 V, V_{IS} = (V_{CC} − 4.5 V), −1 V, 0 V 1 V, 2 V, V_{CC} I_{IS} = 100 mA		0.6	1.3	Ω
ΔR_{ON}	On−Resistance Match			0.1		Ω
R_{ON} Flatness	On−Resistance Resistance Flatness			0.37		Ω
$I_{NO/NC(off)}$	Switch Off Leakage Current	V_{CC} = 2.7 V, $V_{NC/NO}$ = −2.5 V or 2.5 V, V_{COM} = 2.5 V or −2.5 V		50		nA
$I_{COM(off)}$					±250	nA
$I_{COM(on)}$	Channel On Leakage Current			50	±250	nA
DIGITAL CONTROL						
V_{INH}	Input Voltage High	V_{CC} = 5 V V_{CC} = 2.7 V to 4.3 V	1.6 1.4			V
V_{INL}	Input Voltage Low	V_{CC} = 2.7 V to 5 V			0.6	V
C_{IN}	Input Capacitance			5		pF
I_{INL} or I_{INH}	Input Current	V_{IN} = 0 or V_{CC}			±1	μA
POWER CONSUMPTION						
I_{CC}	Maximum Quiescent Supply Current	V_{CC} = 2.7 V to 4.3 V		50	±250	nA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Typical values are measured at 25°C and are for design aid only, not guaranteed nor subject to production testing.
5. Guaranteed by design, not subject to production testing.

DYNAMIC CHARACTERISTICS (V_{CC} = 2.7 V, ±10%) (Note 4)

Symbol	Parameter	Test Conditions	Guaranteed Maximum Limit −40°C to 85°C Min	Typ	Max	Unit
t_{BBM}	Break−Before−Make Time (Notes 6 and 7)	V_{CC} = 2.7 V, V_{IS} = 1.5 V, R_L = 50 Ω, C_L = 35 pF	1000	1250		ns
$t_{ON(EN)}$	Enable Turn−On Time (Notes 6 and 7)			80	150	ns
$t_{OFF(EN)}$	Enable Turn−Off Time (Notes 6 and 7)			110	130	ns
Q_{INJ}	Charge Injection (Note 6)	C_L = 1 nF, R_{GEN} = 0 Ω, V_{GEN} = 0 V		60		pC
OIRR	Off−Isolation (Note 6)	V_{CC} = 2.7 V, R_L = 50 Ω, C_L = 5 pF, f = 300 kHz		−58		dB
X_{TALK}	Crosstalk (Notes 6 and 8)			−61		dB
BW	Bandwidth (Note 6)	V_{CC} = 2.7 V, R_L = 50 Ω, −3 dB		44		MHz
$C_{NC/NO(off)}$	Channel−Off Capacitance (Note 6)	V_{CC} = 2.7 V, f = 1 MHz		25		pF
$C_{COM/NC/NO(on)}$	Channel−On Capacitance (Note 6)			75		pF

6. Guaranteed by design, not subject to production testing.
7. V_{IS} = input voltage to perform proper function.
8. Crosstalk Measured between channels.

TYPICAL CHARACTERISTICS

(25°C, unless otherwise specified)

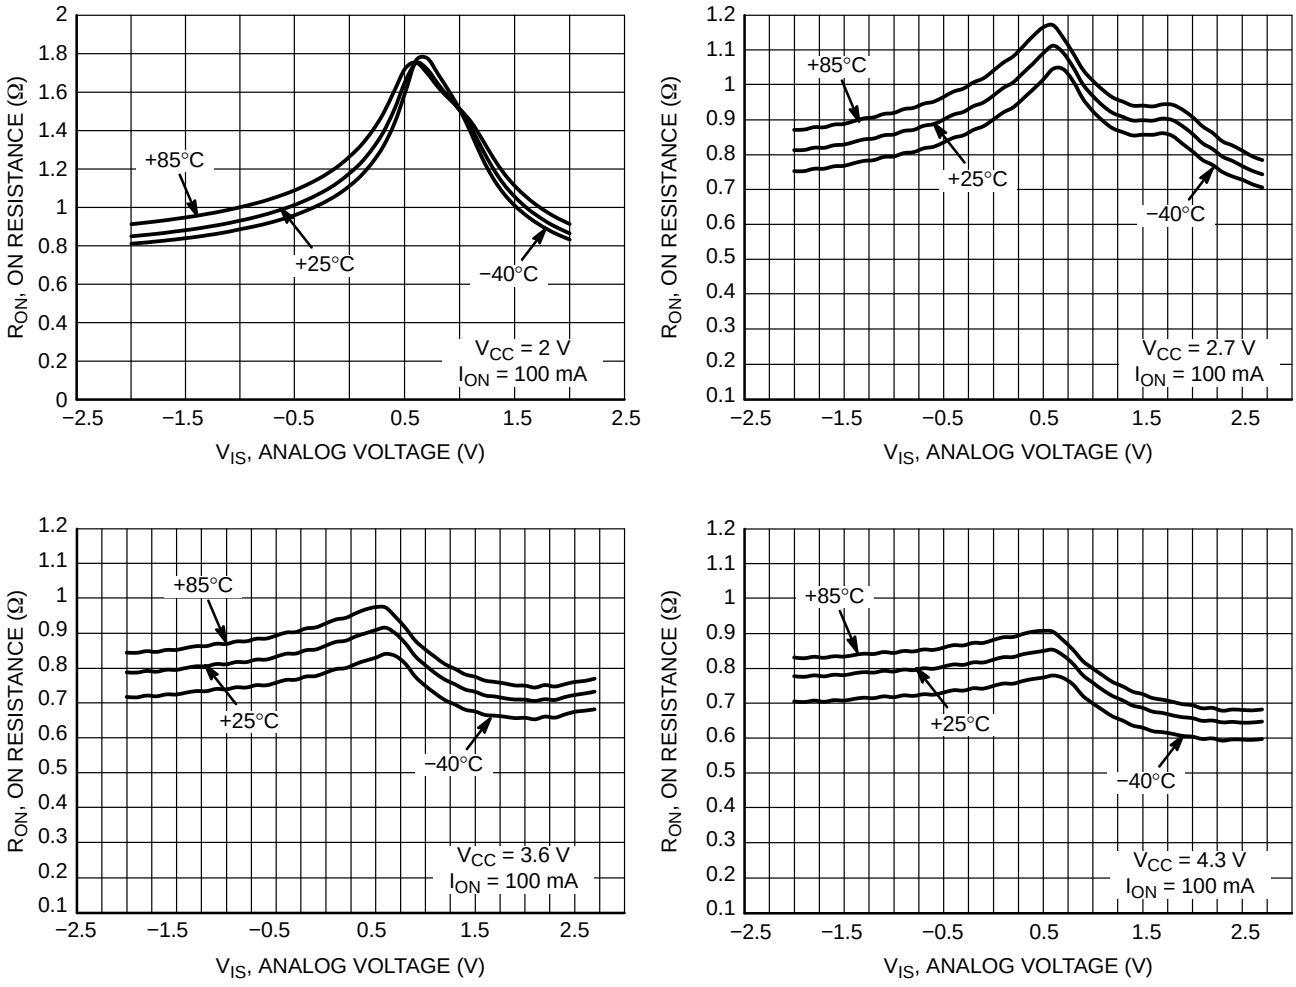


Figure 2. On Resistance (R_{ON}) vs. Analog Input Voltage (V_{IS})

TYPICAL CHARACTERISTICS

(25°C, unless otherwise specified)

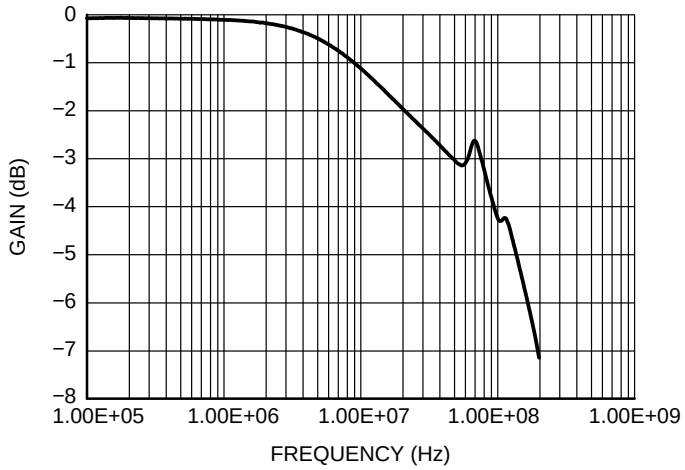


Figure 3. Bandwidth Measurement − Gain vs. Frequency

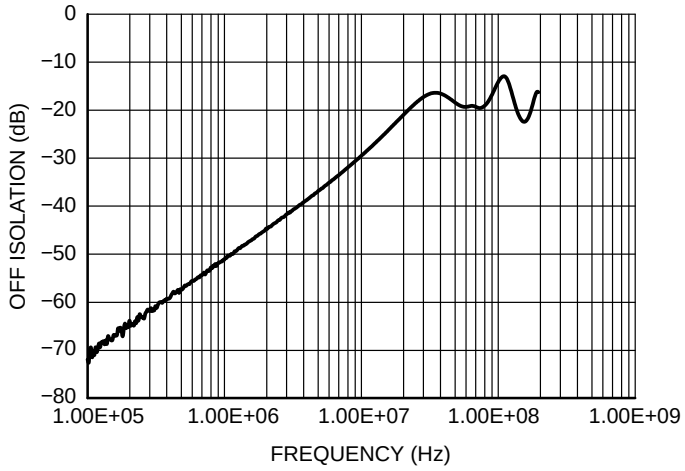


Figure 4. Off Isolation Measurement

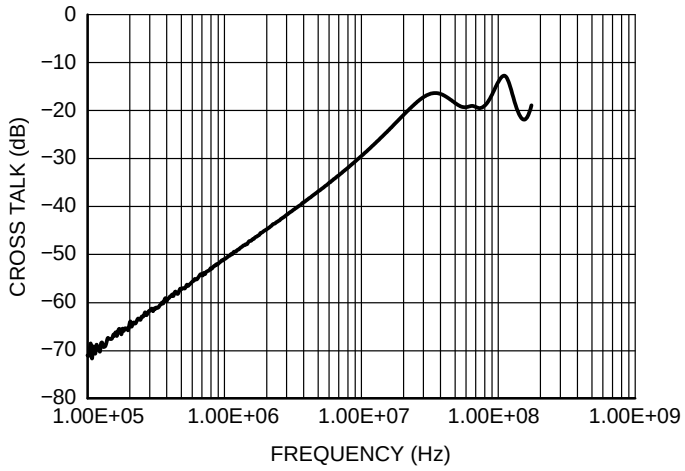


Figure 5. Cross Talk Measurement

TEST CIRCUITS

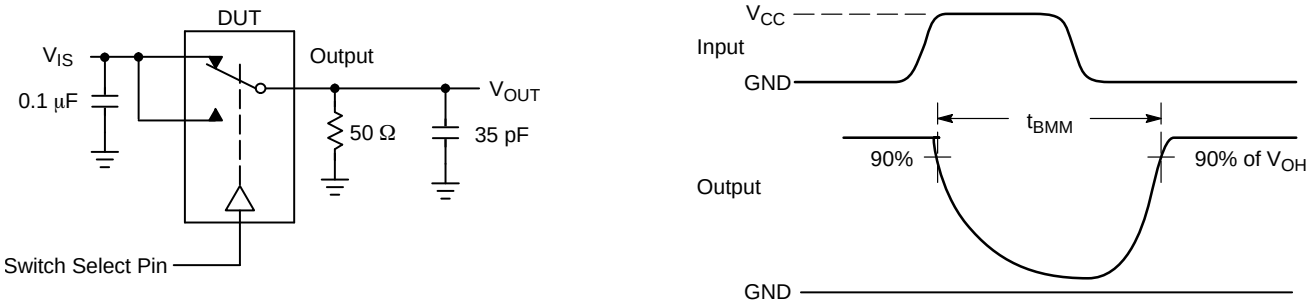


Figure 6. t_{BBM} (Time Break−Before−Make)

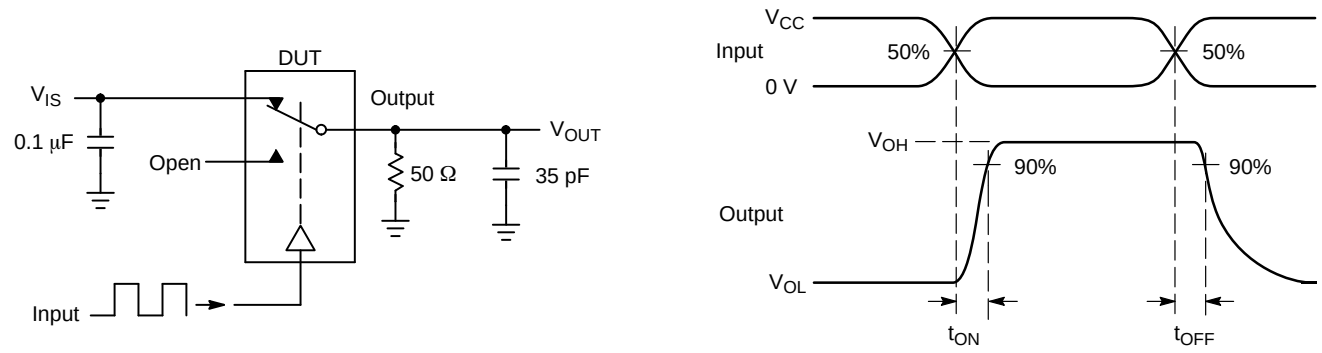


Figure 7. t_{ON}/t_{OFF}


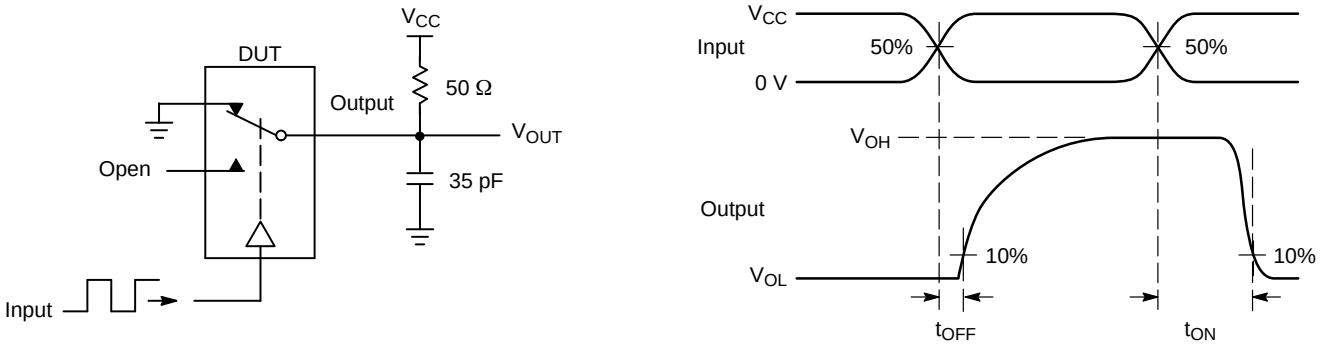


Figure 8. t_{ON}/t_{OFF}

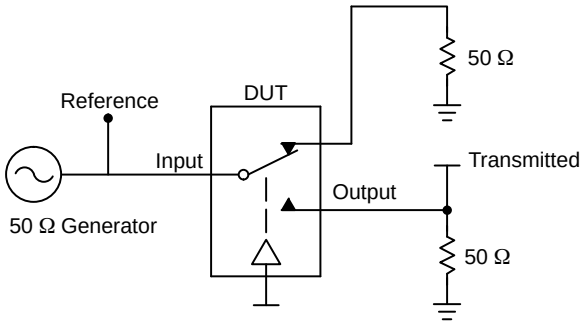

Channel switch control/s test socket is normalized. Off isolation is measured across an off channel. On loss is the bandwidth of an On switch. V_{ISO}, Bandwidth and V_{ONL} are independent of the input signal direction.

V_{ISO} = Off Channel Isolation = $20\ \text{Log}\left(\frac{V_{OUT}}{V_{IN}}\right)$ for V_{IN} at 100 kHz

V_{ONL} = On Channel Loss = $20\ \text{Log}\left(\frac{V_{OUT}}{V_{IN}}\right)$ for V_{IN} at 100 kHz to 50 MHz

Bandwidth (BW) = the frequency 3 dB below V_{ONL}
V_{CT} = Use V_{ISO} setup and test to all other switch analog input/outputs terminated with 50 Ω

Figure 9. Off Channel Isolation/On Channel Loss (BW)/Crosstalk (On Channel to Off Channel)/V_{ONL}

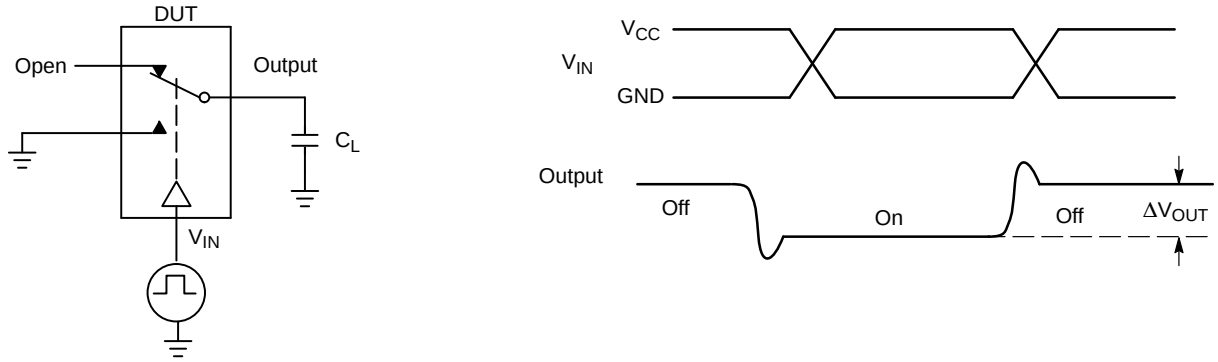


Figure 10. Charge Injection: (Q)


ORDERING INFORMATION

Device	Package	Shipping†
NLAS2750MUTAG	UQFN10 (Pb−Free)	3000 / Tape & Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

UQFN10 1.4x1.8, 0.4P
CASE 488AT
ISSUE A


DATE 01 AUG 2007




SCALE 5:1

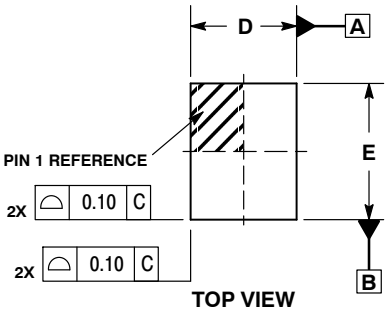


TOP VIEW

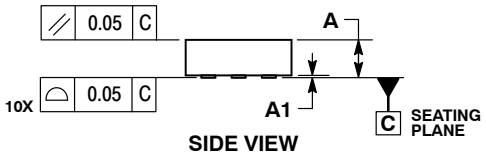


SIDE VIEW

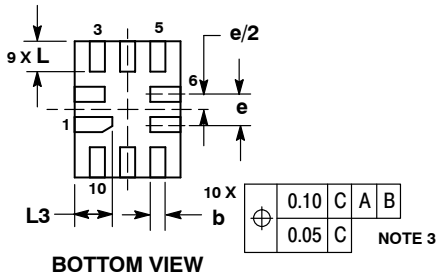

BOTTOM VIEW



DETAIL A
Bottom View
(Optional)

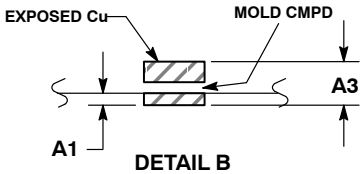


DETAIL B
Side View
(Optional)

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM FROM TERMINAL.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

	MILLIMETERS	
DIM	MIN	MAX
A	0.45	0.60
A1	0.00	0.05
A3	0.127 REF	
b	0.15	0.25
D	1.40 BSC	
E	1.80 BSC	
e	0.40 BSC	
L	0.30	0.50
L1	0.00	0.15
L3	0.40	0.60


GENERIC
MARKING DIAGRAM*



XX = Specific Device Code
M = Date Code
▪ = Pb−Free Package
(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present.

MOUNTING FOOTPRINT

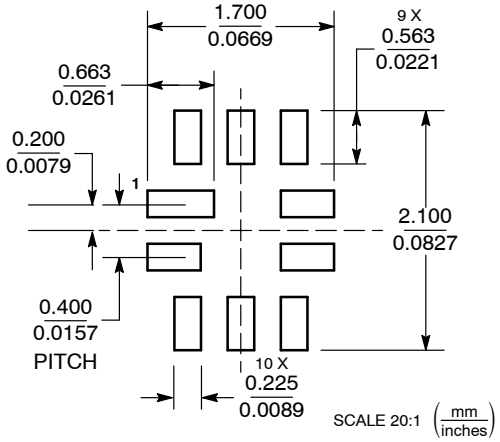

SCALE 20:1 (mm / inches)

DOCUMENT NUMBER:	**98AON22493D**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**10 PIN UQFN, 1.4 X 1.8, 0.4P**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2006

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales