NLAS44599

Low Voltage Single Supply Dual DPDT Analog Switch

The NLAS44599 is an advanced dual−independent CMOS double pole−double throw (DPDT) analog switch fabricated with silicon gate CMOS technology. It achieves high speed propagation delays and low ON resistances while maintaining CMOS low power dissipation. This DPDT controls analog and digital voltages that may vary across the full power−supply range (from V_{CC} to GND).

The device has been designed so the ON resistance (R_{ON}) is much lower and more linear over input voltage than R_{ON} of typical CMOS analog switches.

The channel select input is compatible with standard CMOS outputs.

The channel select input structure provides protection when voltages between 0 V and 5.5 V are applied, regardless of the supply voltage. This input structure helps prevent device destruction caused by supply voltage − input/output voltage mismatch, battery backup, hot insertion, etc.

The NLAS44599 can also be used as a quad 2−to−1 multiplexer−demultiplexer analog switch with two Select pins that each controls two multiplexer−demultiplexers.

- Channel Select Input Over−Voltage Tolerant to 5.5 V
- Fast Switching and Propagation Speeds
- Break−Before−Make Circuitry
- Low Power Dissipation: I_{CC} = 2 μA (Max) at T_A = 25°C
- Diode Protection Provided on Channel Select Input
- Improved Linearity and Lower ON Resistance over Input Voltage
- Latch−up Performance Exceeds 300 mA
- ESD Performance: Human Body Model; > 2000 V,
  Machine Model; > 200 V
- Chip Complexity: 158 FETs
- Pb−Free Packages are Available


ON Semiconductor®

http://onsemi.com


MARKING DIAGRAMS



QFN−16
MN SUFFIX
CASE 485G





Current Part Marking



Previous Part Marking*

*Previous releases of this device may be marked as shown in this diagram.





TSSOP−16
DT SUFFIX
CASE 948F


A	= Assembly Location
L	= Wafer Lot
Y	= Year
W	= Work Week

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 10 of this data sheet.

© Semiconductor Components Industries, LLC, 2008

QFN−16 PACKAGE

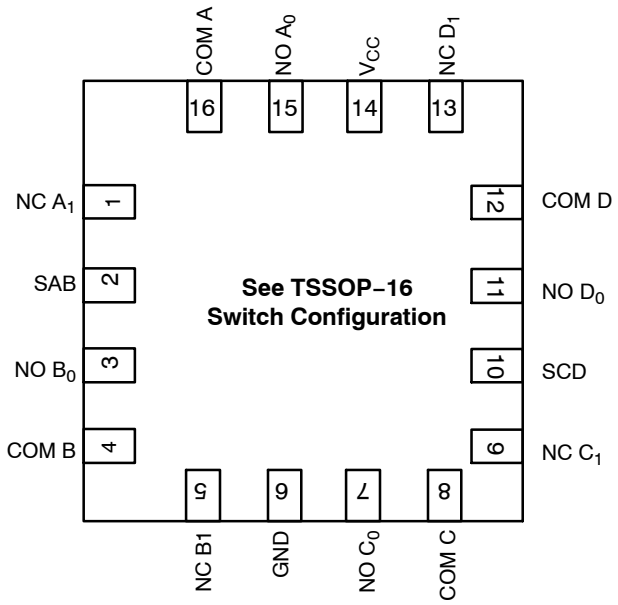

FUNCTION TABLE

Select AB or CD	On Channel
L	NC to COM
H	NO to COM

TSSOP−16 PACKAGE

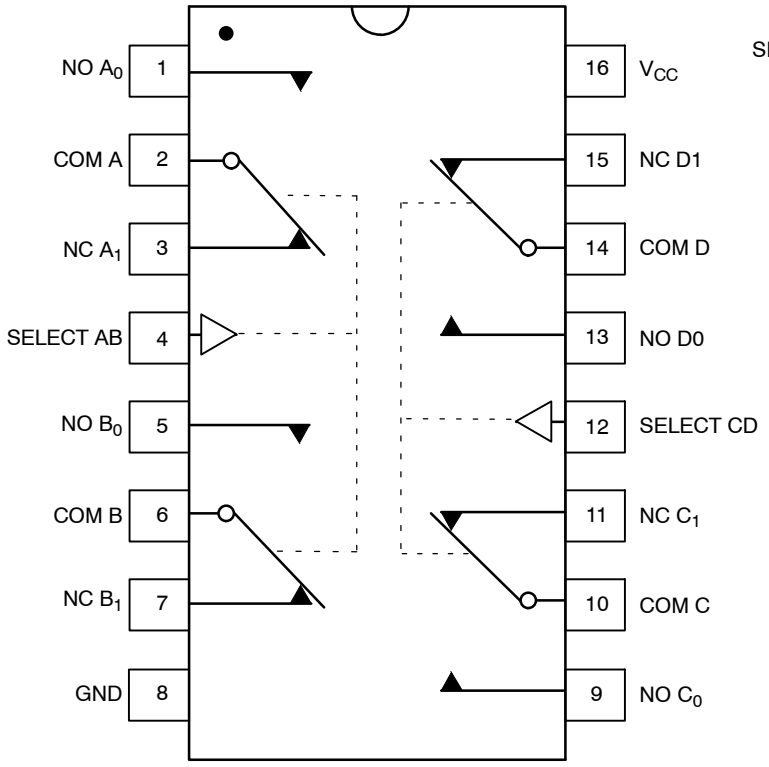


Figure 1. Logic Diagram

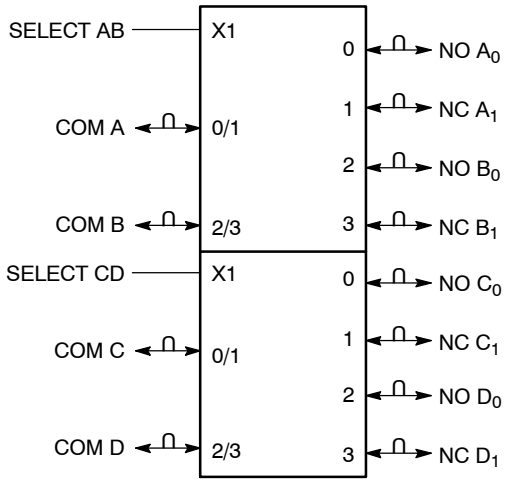


Figure 2. IEC Logic Symbol

MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
V_{CC}	Positive DC Supply Voltage		−0.5 to +7.0	V
V_{IS}	Analog Input Voltage (V_{NO} or V_{COM})		−0.5 ≤ V_{IS} ≤ V_{CC} +0.5	
V_{IN}	Digital Select Input Voltage		−0.5 ≤ V_I ≤ +7.0	V
I_{IK}	DC Current, Into or Out of Any Pin		±50	mA
P_D	Power Dissipation in Still Air	QFN−16 TSSOP−16	800 450	mW
T_{STG}	Storage Temperature Range		−65 to +150	°C
T_L	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
T_J	Junction Temperature Under Bias		+150	°C
MSL	Moisture Sensitivity		Level 1	
F_R	Flammability Rating	Oxygen Index: 30% − 35%	UL 94−V0 (0.125 in)	
V_{ESD}	ESD Withstand Voltage	Human Body Model (Note 1) Machine Model (Note 2) Charged Device Model (Note 3)	2000 200 1000	V
$I_{Latch-Up}$	Latch−Up Performance	Above V_{CC} and Below GND at 125°C (Note 4)	±300	mA
θ_{JA}	Thermal Resistance	QFN−16 TSSOP−16	80 164	°C/W

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Tested to EIA/JESD22−A114−A.
2. Tested to EIA/JESD22−A115−A.
3. Tested to JESD22−C101−A.
4. Tested to EIA/JESD78.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Min	Max	Unit
V_{CC}	DC Supply Voltage		2.0	5.5	V
V_{IN}	Digital Select Input Voltage		GND	5.5	V
V_{IS}	Analog Input Voltage (NC, NO, COM)		GND	V_{CC}	V
T_A	Operating Temperature Range		−55	+125	°C
t_r, t_f	Input Rise or Fall Time, SELECT	V_{CC} = 3.3 V ± 0.3 V V_{CC} = 5.0 V ± 0.5 V	0 0	100 20	ns/V

DEVICE JUNCTION TEMPERATURE VERSUS TIME TO 0.1% BOND FAILURES

Junction Temperature °C	Time, Hours	Time, Years
80	1,032,200	117.8
90	419,300	47.9
100	178,700	20.4
110	79,600	9.4
120	37,000	4.2
130	17,800	2.0
140	8,900	1.0

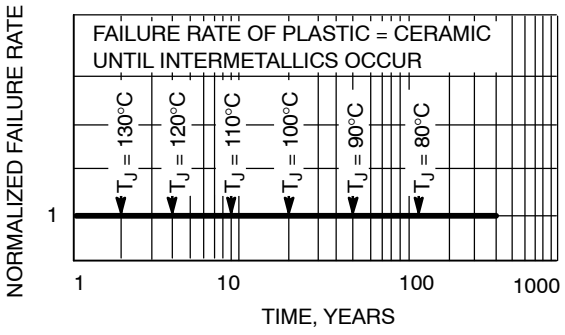


Figure 3. Failure Rate vs. Time Junction Temperature

DC CHARACTERISTICS – Digital Section (Voltages Referenced to GND)

Symbol	Parameter	Condition	V_{CC}	Guaranteed Limit			Unit
				−55°C to 25°C	<85°C	<125°C	
V_{IH}	Minimum High–Level Input Voltage, Select Inputs		2.0 2.5 3.0 4.5 5.5	1.5 1.9 2.1 3.15 3.85	1.5 1.9 2.1 3.15 3.85	1.5 1.9 2.1 3.15 3.85	V
V_{IL}	Maximum Low–Level Input Voltage, Select Inputs		2.0 2.5 3.0 4.5 5.5	0.5 0.6 0.9 1.35 1.65	0.5 0.6 0.9 1.35 1.65	0.5 0.6 0.9 1.35 1.65	V
I_{IN}	Maximum Input Leakage Current	V_{IN} = 5.5 V or GND	5.5	±0.2	±2.0	±2.0	μA
I_{OFF}	Power Off Leakage Current, Select Inputs	V_{IN} = 5.5 V or GND	0	±10	±10	±10	μA
I_{CC}	Maximum Quiescent Supply Current	Select and V_{IS} = V_{CC} or GND	5.5	4.0	4.0	8.0	μA

DC ELECTRICAL CHARACTERISTICS – Analog Section

Symbol	Parameter	Condition	V_{CC}	Guaranteed Limit			Unit
				−55°C to 25°C	<85°C	<125°C	
R_{ON}	Maximum “ON” Resistance (Figures 17 – 23)	V_{IN} = V_{IL} or V_{IH} V_{IS} = GND to V_{CC} $\|I_{IN}\| \leq$ 10.0 mA	2.5 3.0 4.5 5.5	85 45 30 25	95 50 35 30	105 55 40 35	Ω
$R_{FLAT\ (ON)}$	ON Resistance Flatness (Figures 17 – 23)	V_{IN} = V_{IL} or V_{IH} $\|I_{IN}\| \leq$ 10.0 mA V_{IS} = 1 V, 2 V, 3.5 V	4.5	4	4	5	Ω
$I_{NC(OFF)}$ $I_{NO(OFF)}$	NO or NC Off Leakage Current (Figure 9)	V_{IN} = V_{IL} or V_{IH} V_{NO} or V_{NC} = 1.0 V_{COM} 4.5 V	5.5	1	10	100	nA
$I_{COM(ON)}$	COM ON Leakage Current (Figure 9)	V_{IN} = V_{IL} or V_{IH} V_{NO} 1.0 V or 4.5 V with V_{NC} floating or V_{NO} 1.0 V or 4.5 V with V_{NO} floating V_{COM} = 1.0 V or 4.5 V	5.5	1	10	100	nA

AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0$ ns)

Symbol	Parameter	Test Conditions	V_{CC} (V)	V_{IS} (V)	Guaranteed Maximum Limit							Unit
					−55°C to 25°C			< 85°C		< 125°C		
					Min	Typ*	Max	Min	Max	Min	Max	
t_{ON}	Turn−On Time (Figures 12 and 13)	R_L = 300 Ω, C_L = 35 pF (Figures 5 and 6)	2.5	2.0	5	23	35	5	38	5	41	ns
			3.0	2.0	5	16	24	5	27	5	30	
			4.5	3.0	2	11	16	2	19	2	22	
			5.5	3.0	2	9	14	2	17	2	20	
t_{OFF}	Turn−Off Time (Figures 12 and 13)	R_L = 300 Ω, C_L = 35 pF (Figures 5 and 6)	2.5	2.0	1	7	12	1	15	1	18	ns
			3.0	2.0	1	5	10	1	13	1	16	
			4.5	3.0	1	4	6	1	9	1	12	
			5.5	3.0	1	3	5	1	8	1	11	
t_{BBM}	Minimum Break−Before−Make Time	V_{IS} = 3.0 V (Figure 4) R_L = 300 Ω, C_L = 35 pF	2.5	2.0	1	12		1		1		ns
			3.0	2.0	1	11		1		1		
			4.5	3.0	1	6		1		1		
			5.5	3.0	1	5		1		1		

		Typical @ 25, V_{CC} = 5.0 V	pF
C_{IN}	Maximum Input Capacitance, Select Input	8	
C_{NO} or C_{NC}	Analog I/O (switch off)	10	
C_{COM}	Common I/O (switch off)	10	
$C_{(ON)}$	Feedthrough (switch on)	20	

*Typical Characteristics are at 25°C.

ADDITIONAL APPLICATION CHARACTERISTICS (Voltages Referenced to GND Unless Noted)

Symbol	Parameter	Condition	V_{CC} V	Typical 25°C	Unit
BW	Maximum On−Channel −3dB Bandwidth or Minimum Frequency Response (Figure 11)	V_{IN} = 0 dBm V_{IN} centered between V_{CC} and GND (Figure 7)	3.0	145	MHz
			4.5	170	
			5.5	175	
V_{ONL}	Maximum Feedthrough On Loss	V_{IN} = 0 dBm @ 100 kHz to 50 MHz V_{IN} centered between V_{CC} and GND (Figure 7)	3.0	−3	dB
			4.5	−3	
			5.5	−3	
V_{ISO}	Off−Channel Isolation (Figure 10)	f = 100 kHz; V_{IS} = 1 V RMS V_{IN} centered between V_{CC} and GND (Figure 7)	3.0	−93	dB
			4.5	−93	
			5.5	−93	
Q	Charge Injection Select Input to Common I/O (Figure 15)	V_{IN} = V_{CC} to GND, F_{IS} = 20 kHz $t_r = t_f$ = 3 ns R_{IS} = 0 Ω, C_L = 1000 pF $Q = C_L * \Delta V_{OUT}$ (Figure 8)	3.0	1.5	pC
			5.5	3.0	
THD	Total Harmonic Distortion THD + Noise (Figure 14)	F_{IS} = 20 Hz to 100 kHz, R_L = Rgen = 600 Ω, C_L = 50 pF V_{IS} = 5.0 V_{PP} sine wave	5.5	0.1	%
VCT	Channel−to−Channel Crosstalk	f = 100 kHz; V_{IS} = 1 V RMS V_{IN} centered between V_{CC} and GND (Figure 7)	5.5	−90	dB
			3.0	−90	

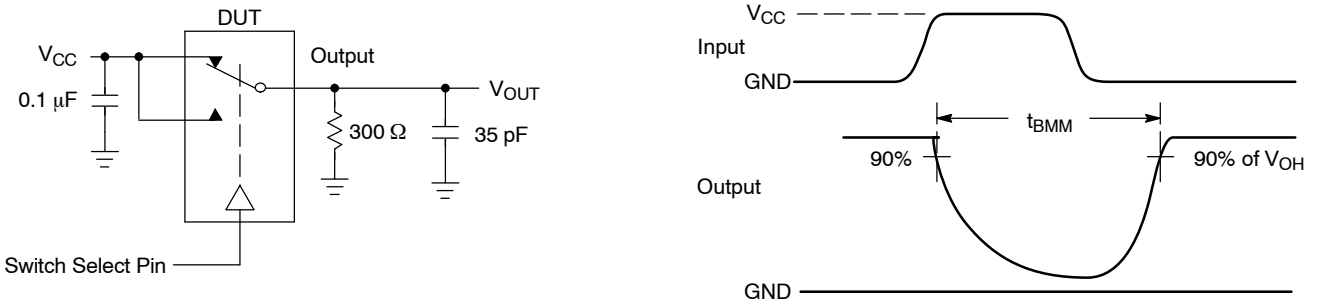


Figure 4. t_{BBM} (Time Break−Before−Make)

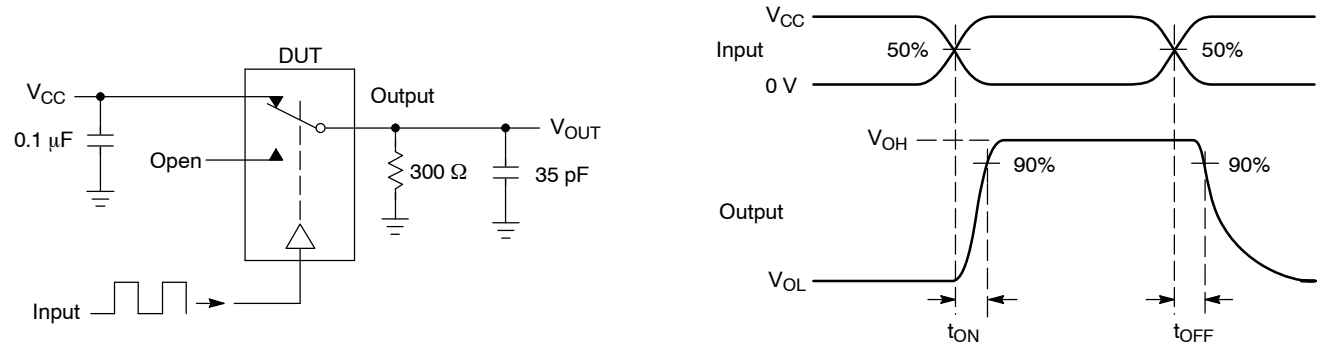


Figure 5. t_{ON}/t_{OFF}


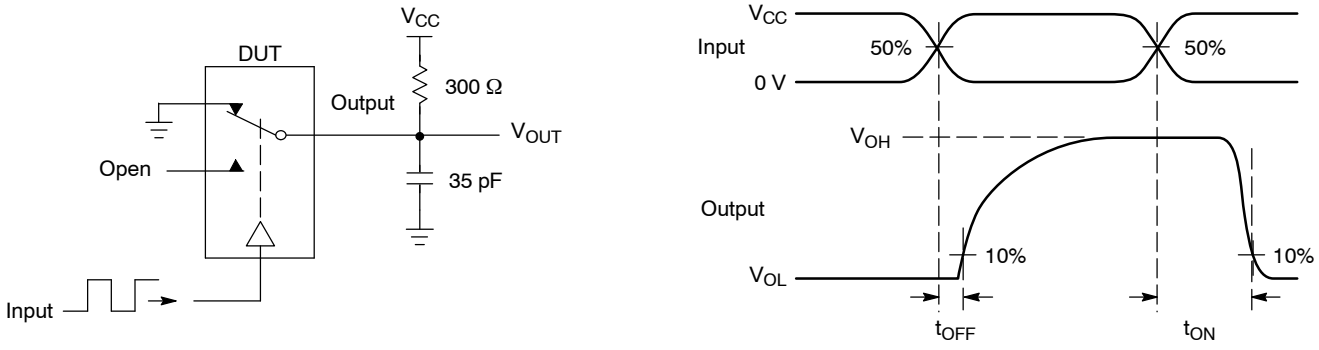


Figure 6. t_{ON}/t_{OFF}

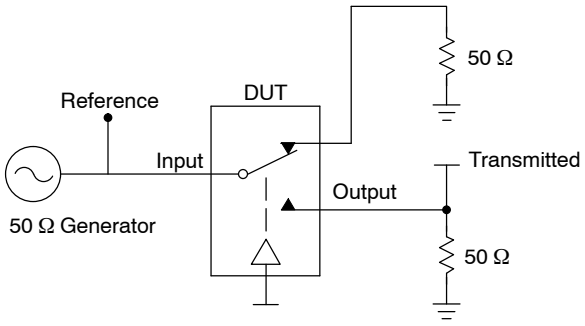

Channel switch control/s test socket is normalized. Off isolation is measured across an off channel. On loss is the bandwidth of an On switch. V_{ISO}, Bandwidth and V_{ONL} are independent of the input signal direction.

V_{ISO} = Off Channel Isolation = 20 Log $\left(\frac{V_{OUT}}{V_{IN}}\right)$ for V_{IN} at 100 kHz

V_{ONL} = On Channel Loss = 20 Log $\left(\frac{V_{OUT}}{V_{IN}}\right)$ for V_{IN} at 100 kHz to 50 MHz

Bandwidth (BW) = the frequency 3 dB below V_{ONL}
V_{CT} = Use V_{ISO} setup and test to all other switch analog input/outputs terminated with 50 Ω

Figure 7. Off Channel Isolation/On Channel Loss (BW)/Crosstalk (On Channel to Off Channel)/V_{ONL}

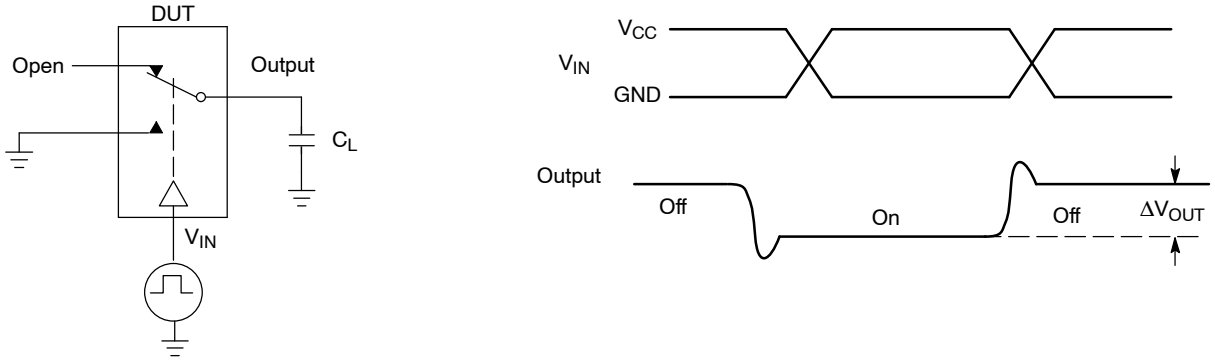


Figure 8. Charge Injection: (Q)

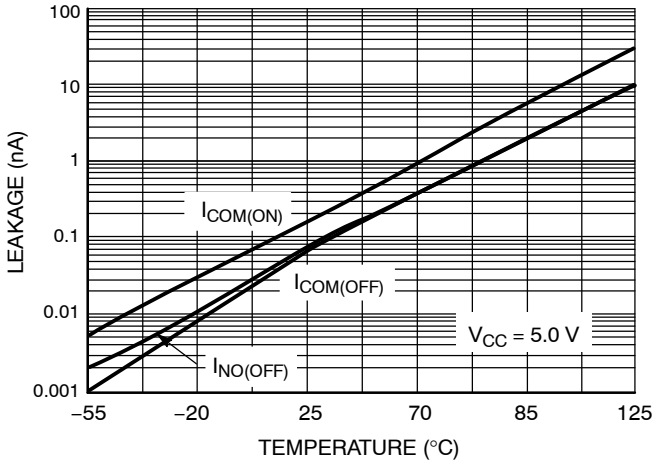


Figure 9. Switch Leakage vs. Temperature

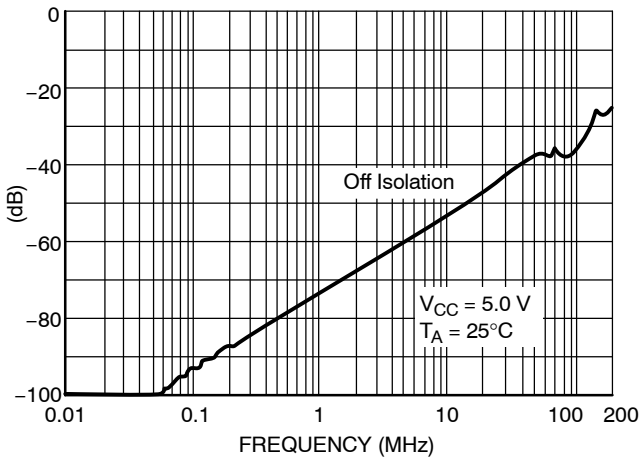


Figure 10. Off−Channel Isolation

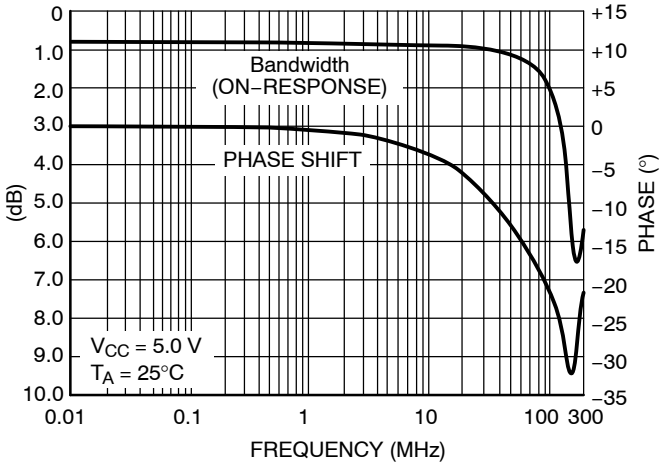


Figure 11. Typical Bandwidth and Phase Shift

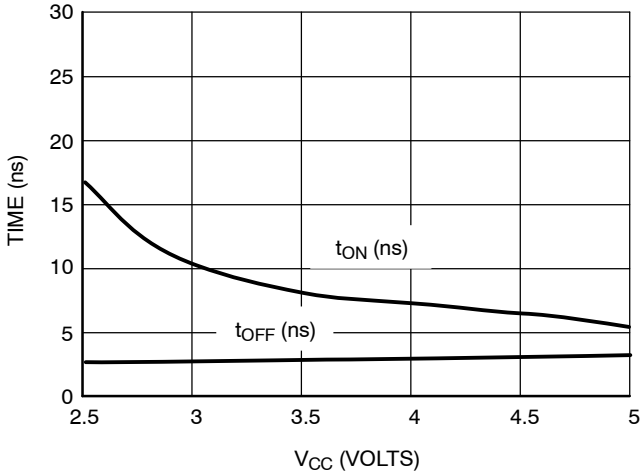


Figure 12. t_{ON} and t_{OFF} vs. V_{CC} at 25°C

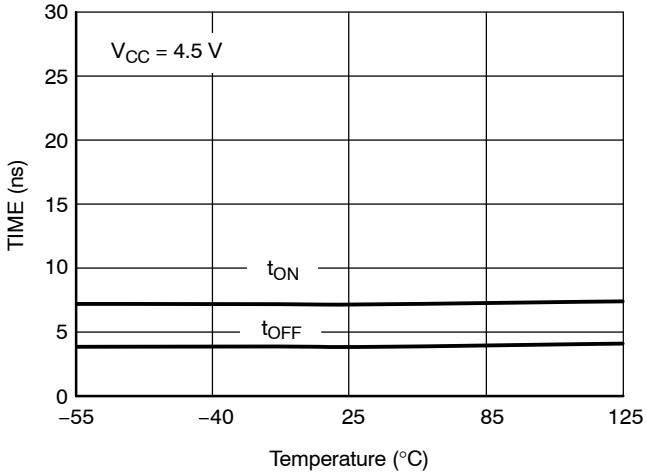


Figure 13. t_{ON} and t_{OFF} vs. Temp

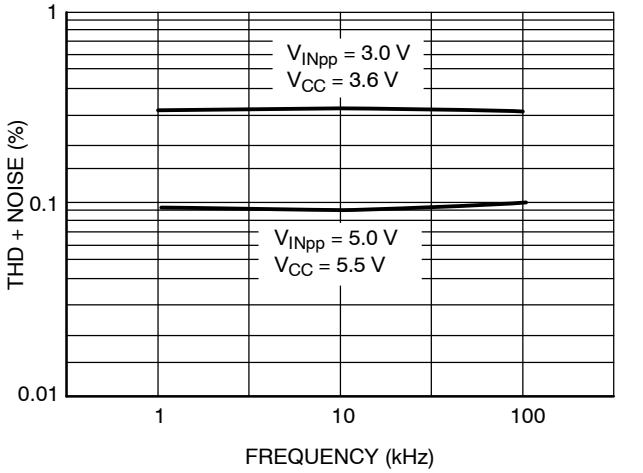


Figure 14. Total Harmonic Distortion Plus Noise vs. Frequency

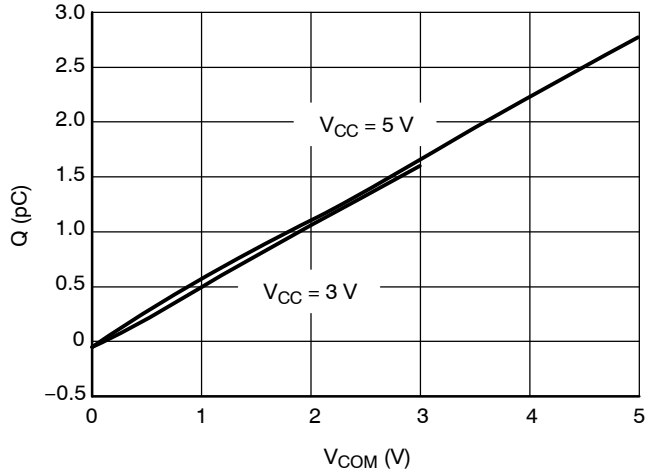


Figure 15. Charge Injection vs. COM Voltage

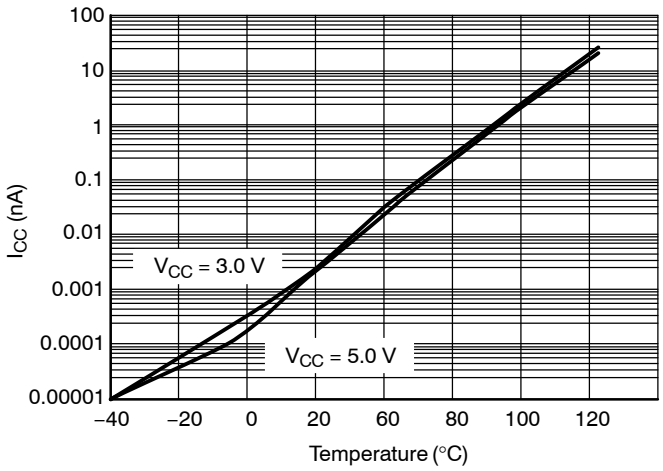


Figure 16. I_{CC} vs. Temp, V_{CC} = 3 V & 5 V

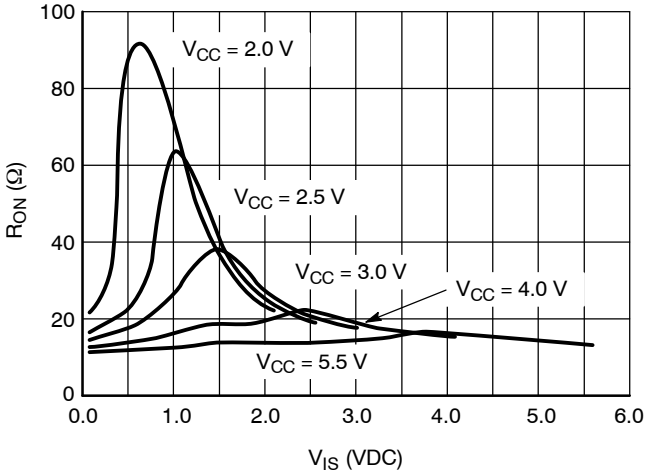


Figure 17. R_{ON} vs. V_{CC}, Temp = 25°C

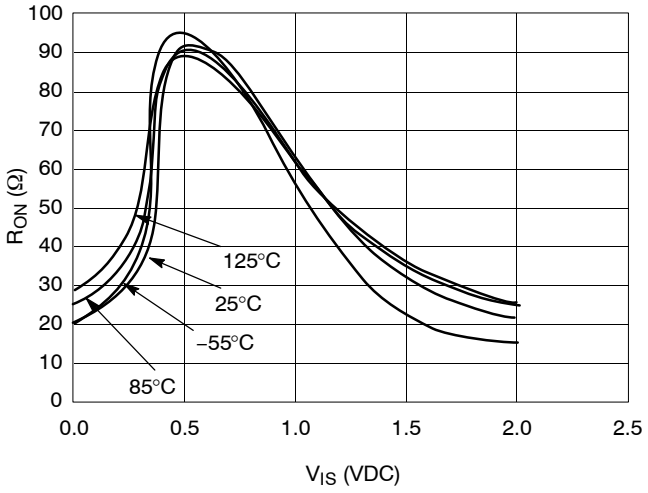


Figure 18. R_{ON} vs Temp, V_{CC} = 2.0 V

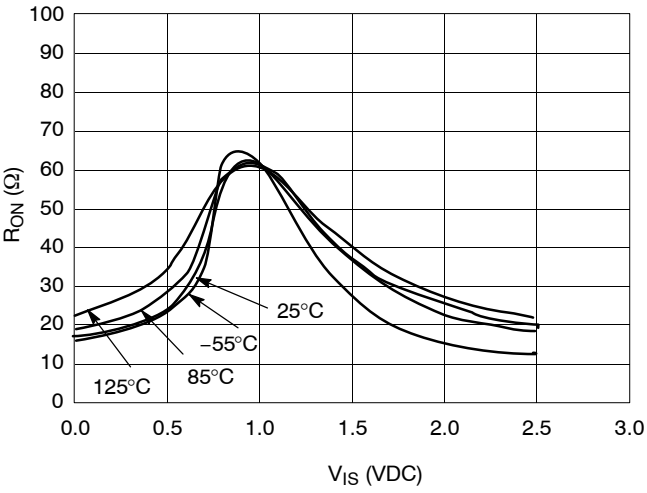


Figure 19. R_{ON} vs. Temp, V_{CC} = 2.5 V

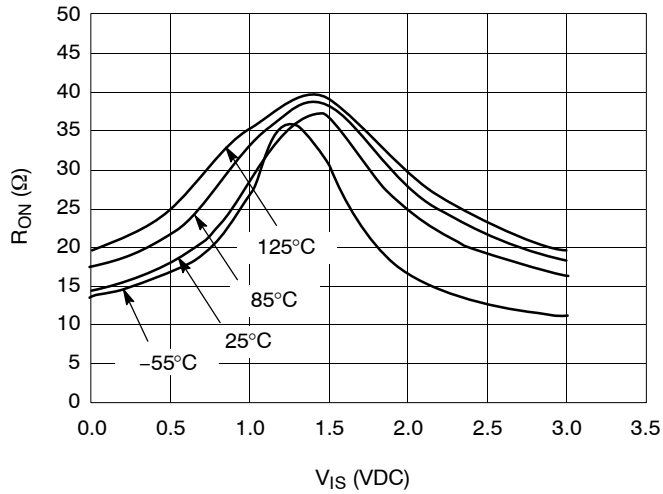


Figure 20. R_{ON} vs. Temp, V_{CC} = 3.0 V

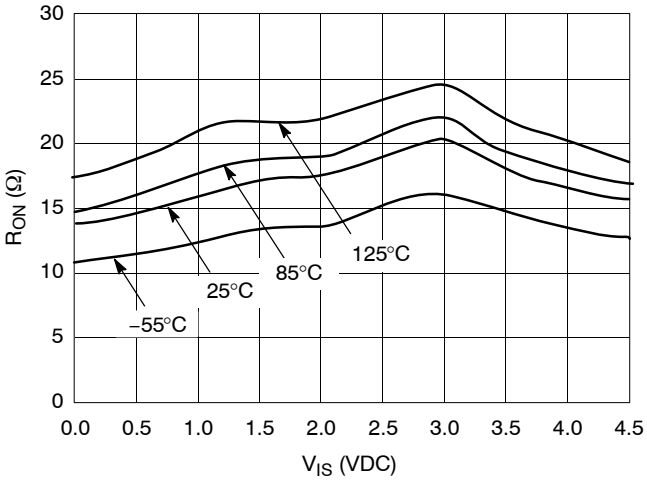


Figure 21. R_{ON} vs. Temp, V_{CC} = 4.5 V

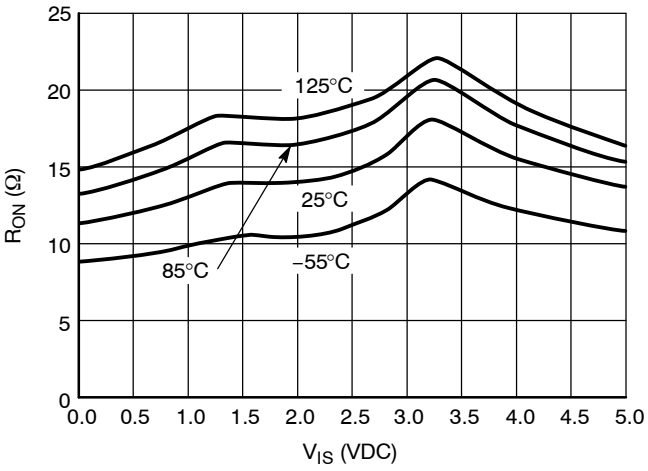


Figure 22. R_{ON} vs. Temp, V_{CC} = 5.0 V

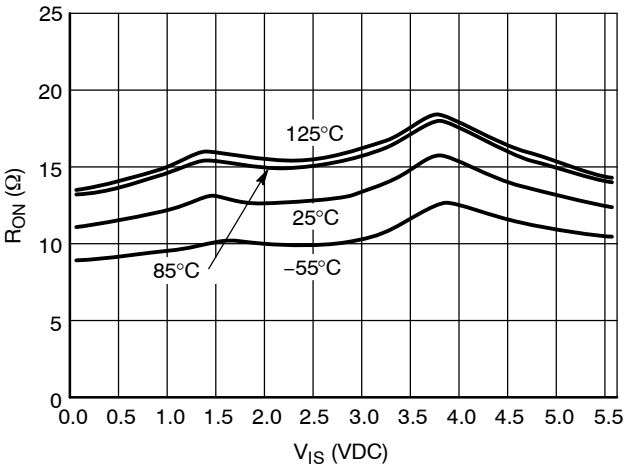


Figure 23. R_{ON} vs. Temp, V_{CC} = 5.5 V

DEVICE ORDERING INFORMATION

Device	Device Nomenclature					Package Type	Shipping†
	Circuit Indicator	Technology	Device Function	Package Suffix	Tape & Reel Suffix		
NLAS44599DT	NL	AS	44599	DT		TSSOP−16*	96 / Unit Rail
NLAS44599DTR2	NL	AS	44599	DT	R2	TSSOP−16*	2500 / Tape & Reel
NLAS44599MN	NL	AS	44599	MN		QFN−16	124 Unit / Rail
NLAS44599MNG	NL	AS	44599	MN		QFN−16 (Pb−Free)	124 Unit / Rail
NLAS44599MNR2	NL	AS	44599	MN	R2	QFN−16	2500 / Tape & Reel
NLAS44599MNR2G	NL	AS	44599	MN	R2	QFN−16 (Pb−Free)	2500 / Tape & Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
*This package is inherently Pb−Free.

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS


QFN16 3x3, 0.5P
CASE 485G
ISSUE G

DATE 08 OCT 2021


SCALE 2:1

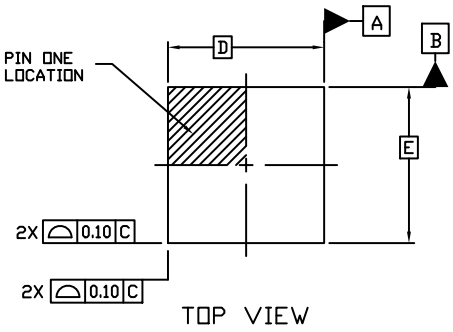

TOP VIEW

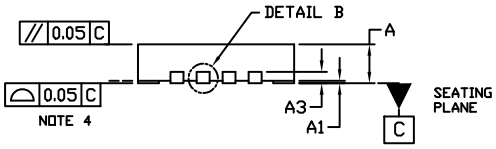


SIDE VIEW

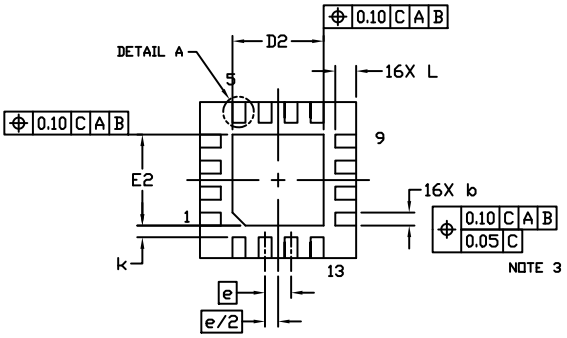


BOTTOM VIEW

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 MM FROM THE TERMINAL TIP.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.




DETAIL B
ALTERNATE CONSTRUCTIONS



DETAIL A
ALTERNATE TERMINAL CONSTRUCTIONS

	MILLIMETERS		
DIM	MIN.	NOM.	MAX.
A	0.80	0.90	1.00
A1	0.00	0.03	0.05
A3		0.20 REF	
b	0.18	0.24	0.30
D		3.00 BSC	
D2	1.65	1.75	1.85
E		3.00 BSC	
E2	1.65	1.75	1.85
e		0.50 BSC	
k		0.18 TYP	
L	0.30	0.40	0.50
L1	0.00	0.08	0.15

MOUNTING FOOTPRINT

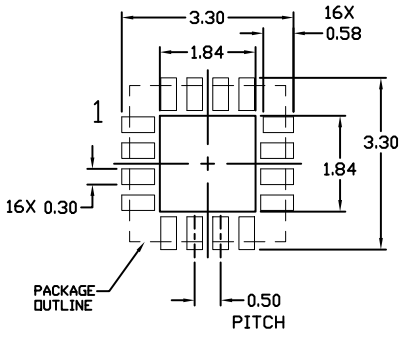

GENERIC MARKING DIAGRAM*



XXXXX = Specific Device Code
A = Assembly Location
L = Wafer Lot
Y = Year
W = Work Week
▪ = Pb−Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON04795D**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**QFN16 3X3, 0.5P**	**PAGE 1 OF 1**


onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019


MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS

TSSOP−16 WB
CASE 948F
ISSUE B

DATE 19 OCT 2006




SCALE 2:1

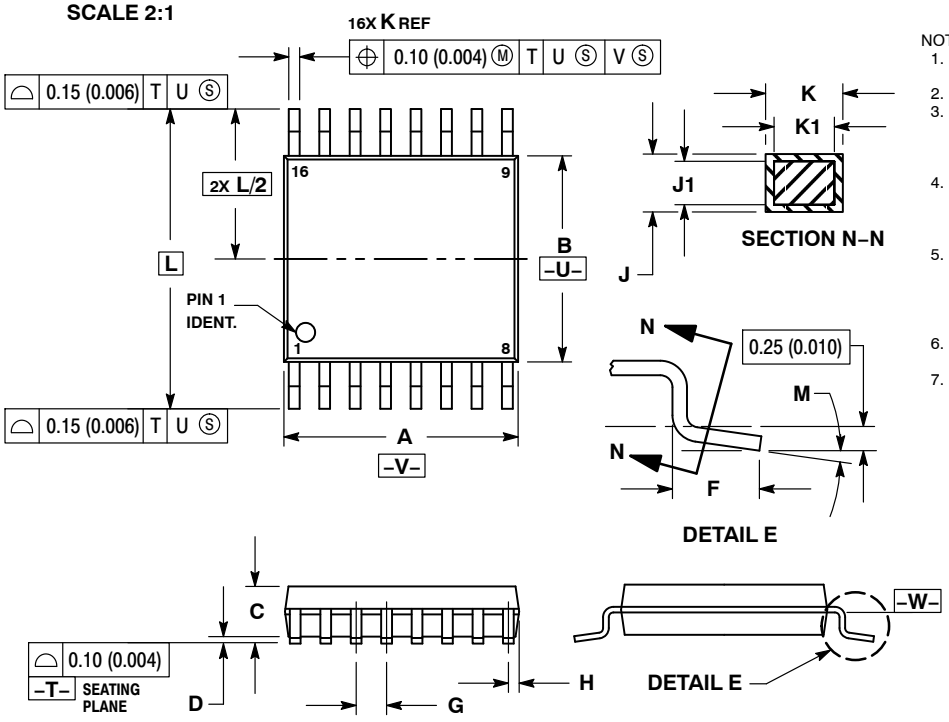

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE −W−.


	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	4.90	5.10	0.193	0.200
B	4.30	4.50	0.169	0.177
C	−−−	1.20	−−−	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
H	0.18	0.28	0.007	0.011
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
M	0 °	8 °	0 °	8 °

RECOMMENDED SOLDERING FOOTPRINT*

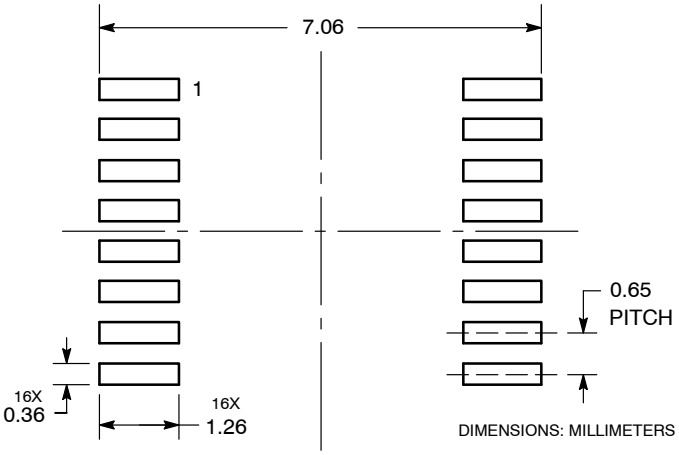

*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GENERIC MARKING DIAGRAM*



XXXX	= Specific Device Code
A	= Assembly Location
L	= Wafer Lot
Y	= Year
W	= Work Week
G or ▪	= Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98ASH70247A**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.	
DESCRIPTION:	**TSSOP−16**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales