NLSV2T240

2-Bit Dual-Supply Inverting Level Translator

The NLSV2T240 is a 2−bit configurable dual−supply voltage level translator. The input A_n and output B_n ports are designed to track two different power supply rails, V_{CCA} and V_{CCB} respectively. Both supply rails are configurable from 0.9 V to 4.5 V allowing universal low−voltage translation from the input A_n to the output B_n port.

Features

- Wide V_{CCA} and V_{CCB} Operating Range: 0.9 V to 4.5 V
- High−Speed w/ Balanced Propagation Delay
- Inputs and Outputs have OVT Protection to 4.5 V
- Non−preferential V_{CCA} and V_{CCB} Sequencing
- Outputs at 3−State until Active V_{CC} is Reached
- Power−Off Protection
- Outputs Switch to 3−State with V_{CCB} at GND
- Ultra−Small Packaging: 1.8 mm x 1.2 mm UDFN8
- This is a Pb−Free Device

Typical Applications

- Mobile Phones, PDAs, Other Portable Devices

Important Information

- ESD Protection for All Pins:
  HBM (Human Body Model) > 5000 V

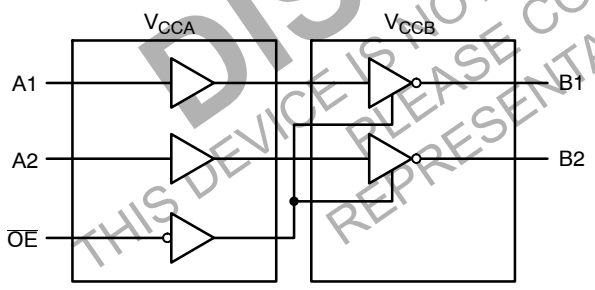


Figure 1. Logic Diagram

DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

ON Semiconductor®

http://onsemi.com




UDFN8
MU SUFFIX
CASE 517AJ

MARKING DIAGRAM



VC = Specific Device Code
M = Date Code
▪ = Pb−Free Package

PIN ASSIGNMENT



(Top View)

ORDERING INFORMATION

Device	Package	Shipping†
NLSV2T240MUTAG	UDFN8 (Pb−Free)	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2012

PIN ASSIGNMENT

PIN	FUNCTION
V_{CCA}	Input Port DC Power Supply
V_{CCB}	Output Port DC Power Supply
GND	Ground
A_n	Input Port
B_n	Output Port
$\overline{OE}$	Output Enable

TRUTH TABLE

Inputs		Outputs
$\overline{OE}$	A_n	B_n
L	L	H
L	H	L
H	X	3−State

MAXIMUM RATINGS

Symbol	Rating		Value	Condition	Unit
V_{CCA}, V_{CCB}	DC Supply Voltage		−0.5 to +5.5		V
V_I	DC Input Voltage	A_n	−0.5 to +5.5		V
V_C	Control Input	$\overline{OE}$	−0.5 to +5.5		V
V_O	DC Output Voltage (Power Down)	B_n	−0.5 to +5.5	V_{CCA} = V_{CCB} = 0	V
	(Active Mode)	B_n	−0.5 to +5.5		V
	(Tri−State Mode)	B_n	−0.5 to +5.5		V
I_{IK}	DC Input Diode Current		−20	V_I < GND	mA
I_{OK}	DC Output Diode Current		−50	V_O < GND	mA
I_O	DC Output Source/Sink Current		±50		mA
I_{CCA}, I_{CCB}	DC Supply Current Per Supply Pin		±100		mA
I_{GND}	DC Ground Current per Ground Pin		±100		mA
T_{STG}	Storage Temperature		−65 to +150		°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Min	Max	Unit
V_{CCA}, V_{CCB}	Positive DC Supply Voltage		0.9	4.5	V
V_I	Bus Input Voltage		GND	4.5	V
V_C	Control Input	$\overline{OE}$	GND	4.5	V
V_{IO}	Bus Output Voltage (Power Down Mode)	B_n	GND	4.5	V
	(Active Mode)	B_n	GND	V_{CCB}	V
	(Tri−State Mode)	B_n	GND	4.5	V
T_A	Operating Temperature Range		−40	+85	°C
$\Delta t / \Delta V$	Input Transition Rise or Rate V_I, from 30% to 70% of V_{CC}; V_{CC} = 3.3 V ±0.3 V		0	10	nS

DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi REPRESENTATIVE FOR INFORMATION

DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	V_{CCA} (V)	V_{CCB} (V)	−40°C to +85°C		Unit
					Min	Max	
V_{IH}	Input HIGH Voltage (An, $\overline{OE}$)		3.6 – 4.5	0.9 – 4.5	2.2	–	V
			2.7 – 3.6		2.0	–	
			2.3 – 2.7		1.6	–	
			1.4 – 2.3		0.65 * V_{CCA}	–	
			0.9 – 1.4		0.9 * V_{CCA}	–	
V_{IL}	Input LOW Voltage (An, $\overline{OE}$)		3.6 – 4.5	0.9 – 4.5	–	0.8	V
			2.7 – 3.6		–	0.8	
			2.3 – 2.7		–	0.7	
			1.4 – 2.3		–	0.35 * V_{CCA}	
			0.9 – 1.4		–	0.1 * V_{CCA}	
V_{OH}	Output HIGH Voltage	I_{OH} = −100 μA; V_I = V_{IL}	0.9 – 4.5	0.9 – 4.5	V_{CCB} – 0.2	–	V
		I_{OH} = −0.5 mA; V_I = V_{IL}	0.9	0.9	0.75 * V_{CCB}	–	
		I_{OH} = −2 mA; V_I = V_{IL}	1.4	1.4	1.05	–	
		I_{OH} = −6 mA; V_I = V_{IL}	1.65	1.65	1.25	–	
			2.3	2.3	2.0	–	
		I_{OH} = −12 mA; V_I = V_{IL}	2.3	2.3	1.8	–	
			2.7	2.7	2.2	–	
		I_{OH} = −18 mA; V_I = V_{IL}	2.3	2.3	1.7	–	
			3.0	3.0	2.4	–	
		I_{OH} = −24 mA; V_I = V_{IL}	3.0	3.0	2.2	–	
V_{OL}	Output LOW Voltage	I_{OL} = 100 μA; V_I = V_{IH}	0.9 – 4.5	0.9 – 4.5	–	0.2	V
		I_{OL} = 0.5 mA; V_I = V_{IH}	1.1	1.1	–	0.3	
		I_{OL} = 2 mA; V_I = V_{IH}	1.4	1.4	–	0.35	
		I_{OL} = 6 mA; V_I = V_{IH}	1.65	1.65	–	0.3	
		I_{OL} = 12 mA; V_I = V_{IH}	2.3	2.3	–	0.4	
			2.7	2.7	–	0.4	
		I_{OL} = 18 mA; V_I = V_{IH}	2.3	2.3	–	0.6	
			3.0	3.0	–	0.4	
		I_{OL} = 24 mA; V_I = V_{IH}	3.0	3.0	–	0.55	
I_I	Input Leakage Current	V_I = V_{CCA} or GND	0.9 – 4.5	0.9 – 4.5	−1.0	1.0	μA
I_{OFF}	Power−Off Leakage Current	$\overline{OE}$ = 0 V	0 0.9 – 4.5	0.9 – 4.5 0	−1.0 −1.0	1.0 1.0	μA
I_{CCA}	Quiescent Supply Current	V_I = V_{CCA} or GND; I_O = 0, V_{CCA} = V_{CCB}	0.9 – 4.5	0.9 – 4.5	–	1.0	μA
I_{CCB}	Quiescent Supply Current	V_I = V_{CCA} or GND; I_O = 0, V_{CCA} = V_{CCB}	0.9 – 4.5	0.9 – 4.5	–	1.0	μA
I_{CCA} + I_{CCB}	Quiescent Supply Current	V_I = V_{CCA} or GND; I_O = 0, V_{CCA} = V_{CCB}	0.9 – 4.5	0.9 – 4.5	–	2.0	μA
ΔI_{CCA}	Increase in I_{CC} per Input Voltage, Other Inputs at V_{CCA} or GND	V_I = V_{CCA} – 0.6 V; V_I = V_{CCA} or GND	4.5 3.6	4.5 3.6	–	10 5.0	μA
ΔI_{CCB}	Increase in I_{CC} per Input Voltage, Other Inputs at V_{CCA} or GND	V_I = V_{CCA} – 0.6 V; V_I = V_{CCA} or GND	4.5 3.6	4.5 3.6	–	10 5.0	μA
I_{OZ}	I/O Tri−State Output Leakage Current	T_A = 25°C, $\overline{OE}$ = 0 V	0.9 – 4.5	0.9 – 4.5	−1.0	1.0	μA

DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi REPRESENTATIVE FOR INFORMATION

TOTAL STATIC POWER CONSUMPTION (I_{CCA} + I_{CCB})

	–40°C to +85°C										
	V_{CCB} (V)										
	4.5		3.3		2.8		1.8		0.9		
V_{CCA} (V)	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Unit
4.5		2		2		2		2		< 1.5	μA
3.3		2		2		2		2		< 1.5	μA
2.8		< 2		< 1		< 1		< 0.5		< 0.5	μA
1.8		< 1		< 1		< 0.5		< 0.5		< 0.5	μA
0.9		< 0.5		< 0.5		< 0.5		< 0.5		< 0.5	μA

NOTE: Connect ground before applying supply voltage V_{CCA} or V_{CCB}. This device is designed with the feature that the power−up sequence of V_{CCA} and V_{CCB} will not damage the IC.

AC ELECTRICAL CHARACTERISTICS

			–40°C to +85°C										
			V_{CCB} (V)										
			4.5		3.3		2.8		1.8		1.2		
Symbol	Parameter	V_{CCA} (V)	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Unit
t_{PLH}, t_{PHL} (Note 1)	Propagation Delay, A_n to B_n	4.5		1.6		1.8		2.0		2.1		2.3	nS
		3.3		1.7		1.9		2.1		2.3		2.6	
		2.8		1.9		2.1		2.3		2.5		2.8	
		1.8		2.1		2.4		2.5		2.7		3.0	
		1.2		2.4		2.7		2.8		3.0		3.3	
t_{PZH}, t_{PZL} (Note 1)	Output Enable, $\overline{OE}$ to B_n	4.5		2.6		3.8		4.0		4.1		4.3	nS
		3.3		3.7		3.9		4.1		4.3		4.6	
		2.5		3.9		4.1		4.3		4.5		4.8	
		1.8		4.1		4.4		4.5		4.7		5.0	
		1.2		4.4		4.7		4.8		5.0		5.3	
t_{PHZ}, t_{PLZ} (Note 1)	Output Disable, $\overline{OE}$ to B_n	4.5		2.6		3.8		4.0		4.1		4.3	nS
		3.3		3.7		3.9		4.1		4.3		4.6	
		2.5		3.9		4.1		4.3		4.5		4.8	
		1.8		4.1		4.4		4.5		4.7		5.0	
		1.2		4.4		4.7		4.8		5.0		5.3	
t_{OSHL}, t_{OSLH} (Note 1)	Output to Output Skew, Time	4.5		0.15		0.15		0.15		0.15		0.15	nS
		3.3		0.15		0.15		0.15		0.15		0.15	
		2.5		0.15		0.15		0.15		0.15		0.15	
		1.8		0.15		0.15		0.15		0.15		0.15	
		1.2		0.15		0.15		0.15		0.15		0.15	

1. Propagation delays defined per Figure 2.

DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi REPRESENTATIVE FOR INFORMATION

CAPACITANCE

Symbol	Parameter	Test Conditions	Typ (Note 2)	Unit
C_{IN}	Control Pin Input Capacitance	V_{CCA} = V_{CCB} = 3.3 V, V_I = 0 V or $V_{CCA/B}$	3.5	pF
$C_{I/O}$	I/O Pin Input Capacitance	V_{CCA} = V_{CCB} = 3.3 V, V_I = 0 V or $V_{CCA/B}$	5.0	pF
C_{PD}	Power Dissipation Capacitance	V_{CCA} = V_{CCB} = 3.3 V, V_I = 0 V or V_{CCA}, f = 10 MHz	20	pF

2. Typical values are at T_A = +25°C.
3. C_{PD} is defined as the value of the IC's equivalent capacitance from which the operating current can be calculated from: $I_{CC(operating)} \cong C_{PD} \times V_{CC} \times f_{IN} \times N_{SW}$ where $I_{CC} = I_{CCA} + I_{CCB}$ and N_{SW} = total number of outputs switching.



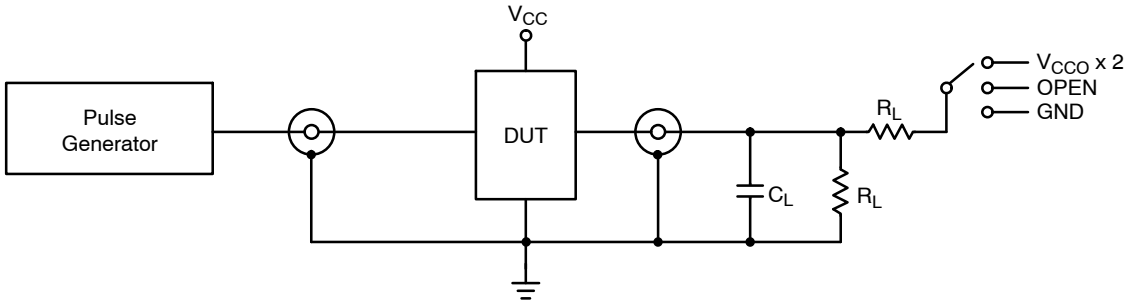


Figure 2. AC (Propagation Delay) Test Circuit

Test	Switch
t_{PLH}, t_{PHL}	OPEN
t_{PLZ}, t_{PZL}	V_{CCO} x 2
t_{PHZ}, t_{PZH}	GND
C_L = 15 pF or equivalent (includes probe and jig capacitance) R_L = 2 kΩ or equivalent Z_{OUT} of pulse generator = 50 Ω	

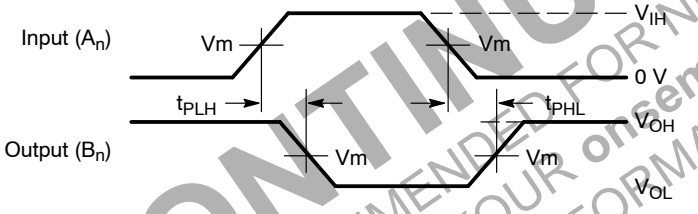

Waveform 1 – Propagation Delays
$t_R = t_F$ = 2.0 ns, 10% to 90%; f = 1 MHz; t_W = 500 ns

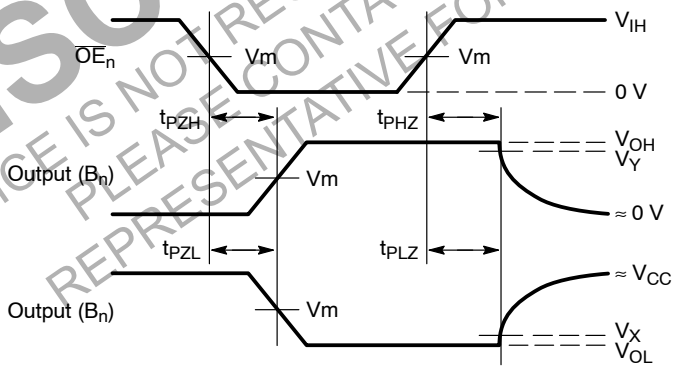

Waveform 2 – Output Enable and Disable Times
$t_R = t_F$ = 2.0 ns, 10% to 90%; f = 1 MHz; t_W = 500 ns

Figure 3. AC (Propagation Delay) Test Circuit Waveforms

Symbol	V_{CC}				
	3.0 V – 4.5 V	2.3 V – 2.7 V	1.65 V – 1.95 V	1.4 V – 1.6 V	0.9 V – 1.3 V
V_{mA}	$V_{CCA}/2$	$V_{CCA}/2$	$V_{CCA}/2$	$V_{CCA}/2$	$V_{CCA}/2$
V_{mB}	$V_{CCB}/2$	$V_{CCB}/2$	$V_{CCB}/2$	$V_{CCB}/2$	$V_{CCB}/2$
V_X	V_{OL} x 0.1	V_{OL} x 0.1	V_{OL} x 0.1	V_{OL} x 0.1	V_{OL} x 0.1
V_Y	V_{OH} x 0.9	V_{OH} x 0.9	V_{OH} x 0.9	V_{OH} x 0.9	V_{OH} x 0.9


DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

UDFN8 1.8x1.2, 0.4P
CASE 517AJ
ISSUE O


DATE 08 NOV 2006




SCALE 4:1

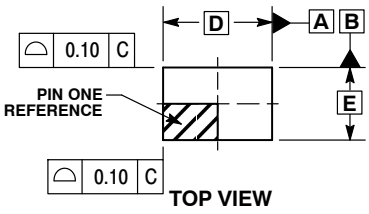


TOP VIEW



DETAIL A
NOTE 5

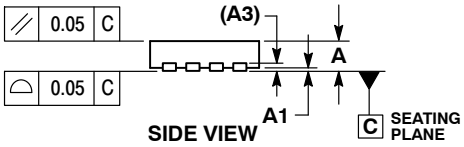

SIDE VIEW

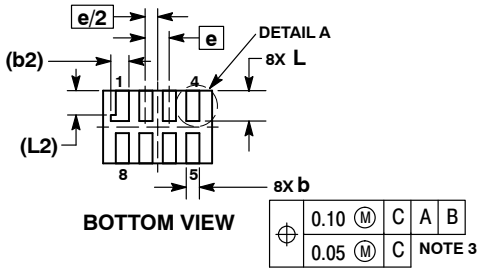


BOTTOM VIEW

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM TERMINAL TIP.
4. MOLD FLASH ALLOWED ON TERMINALS ALONG EDGE OF PACKAGE. FLASH MAY NOT EXCEED 0.03 ONTO BOTTOM SURFACE OF TERMINALS.
5. DETAIL A SHOWS OPTIONAL CONSTRUCTION FOR TERMINALS.


	MILLIMETERS	
DIM	MIN	MAX
A	0.45	0.55
A1	0.00	0.05
A3	0.127 REF	
b	0.15	0.25
b2	0.30 REF	
D	1.80 BSC	
E	1.20 BSC	
e	0.40 BSC	
L	0.45	0.55
L1	0.00	0.03
L2	0.40 REF	

MOUNTING FOOTPRINT
SOLDERMASK DEFINED

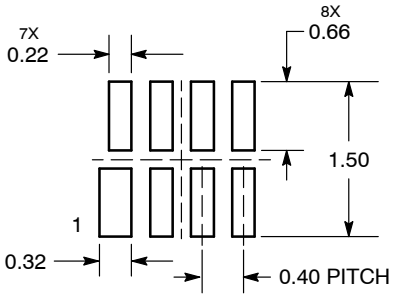

DIMENSIONS: MILLIMETERS

GENERIC
MARKING DIAGRAM*



XX = Specific Device Code
M = Date Code
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present.

DOCUMENT NUMBER:	**98AON23417D**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**UDFN8 1.8X1.2, 0.4P**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2006

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales