



SIGN	DATE	DESCRIPTION	APPROVER
1	8/07'06	Added VDE and TUV standard	聚仁松
2	1/27'07	Soldering temperature changed from 245° to 250°	Tony
3	2009.10.27	The operating temperature is changed	Jacke
4	2009.10.27	The material is changed from Brass to Copper	Jacke
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	



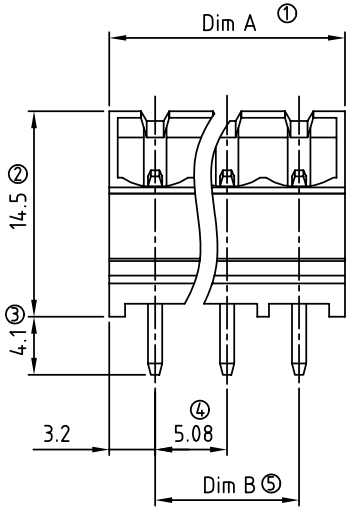

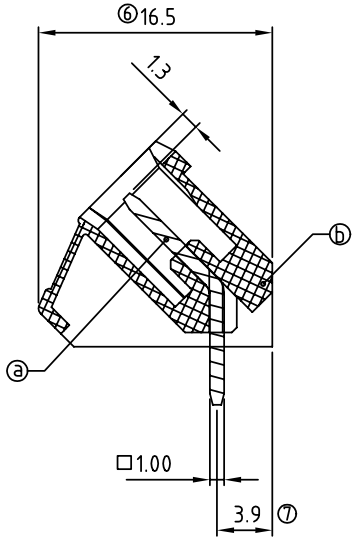

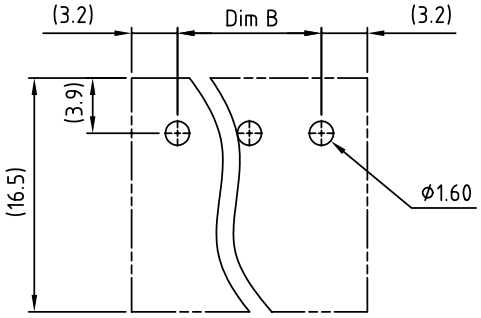

RECOMMENDED PCB LAYOUT

Material:

4 ● Item ⓐ Male contact pin:Copper Tin plated
● Item ⓑ Terminal (housing): Thermoplastic (UL94V-0)

1 Electrical: cULus /VDE/TUV
● Voltage rating: 300V/300V/300V
● Current rating: 15A/17A/20A
● Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
● Operating temperature: -40°C to +115°C
2 ● Soldering temperature: 250°C±10°C/5 Sec
● Safety Approval:

VK xx 5 1 x 0 xxxx G

- No. OF POLES: 02: 2 POLES ... 24: 24 POLES
- COLOR: 0 Black (RAL9005); 2 Red (RAL3001/D); 3 Orange(RAL2011/P); 4 Yellow(RAL1018/A); 5 Green(RAL6018/T); 6 Blue (RAL5015/A); 8 Grey(RAL7035/D)
- 0000: "@" Logo (Standard); 000A: "ANYTEK" Mark; Any special item by customer requst. please contact sales department.
- G: Pb<40000ppm

N = Number of poles
Dim A=(N-1)x5.08+6.48
Dim B=(N-1)x5.08

	Dim A	Dim B
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VK-5.08 Series Close type				
PART NO.	VKxx51x0xxxxG			DWG NO.	8VK0301
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Jacke 2010.01.26	Tony 2007.01.27	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: F	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°