
Banana Plug -
Insulated Side Set Screw Solderless

INCHES (MILLIMETERS)
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

SPECIFICATIONS
Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Nickel
Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS
Current: 15 amps
Breakdown Voltage: 35 Vrms minimum
Contact Resistance: 0.010 ohms maximum



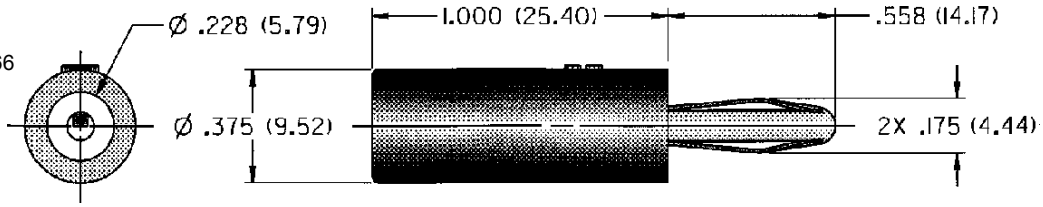

NICKEL PLATING	
108-1703-101	Black

For Standard Banana Jack: .166 (4.23) Diameter
For Low Voltage (50 WVDC) Applications
FEATURES:
• Fast solderless connection of up to 16 gauge wire
•Set screw for dependable connections with low voltage
• Nylon UL approved for self extinguishing