
PIPEWORKS

3-WAY FURNITURE GRADE PVC ELBOW

DIMENSIONAL PROPERTIES

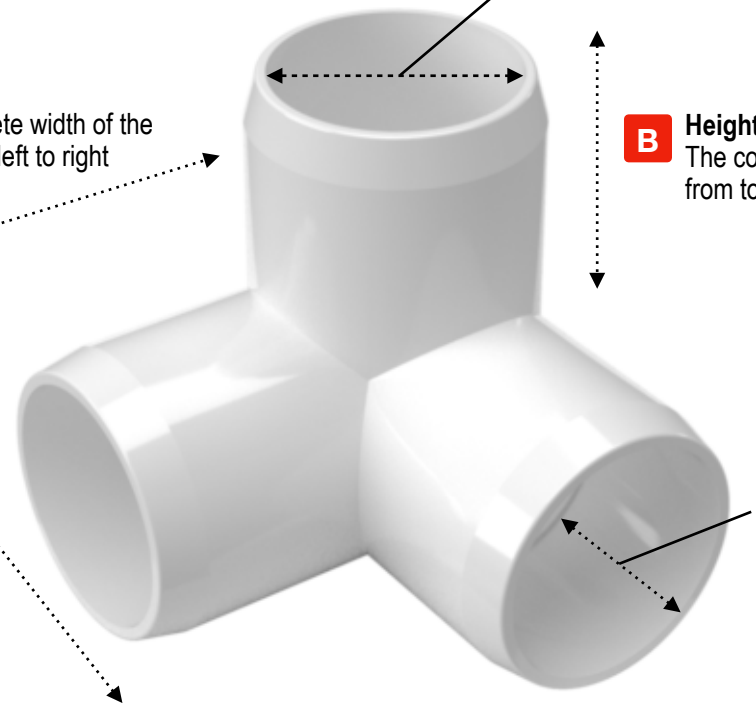

D **Inside Socket Diameter**
The inner diameter of the socket from inside edge to inside edge.

A **Width**
The complete width of the fitting from left to right

B **Height**
The complete height of the fitting from top to bottom

C **Depth**
The complete length of the fitting from front to back

E **Socket Depth**
The length the pipe inserts inside of the fitting

PVC Size	SKU	Width A	Height B	Depth C	Socket Diameter D	Socket Depth E	Weight
1/2”	050-3W	1.785”	1.785”	1.785”	0.840”	0.750”	0.060 lb.
3/4”	075-3W	2.250”	2.250”	2.250”	1.505”	1.000”	0.120 lb.
1”	100-3W	2.835”	2.835”	2.835”	1.315”	1.250”	0.180 lb.
1-1/4”	125-3W	3.352”	3.352”	3.352”	1.660”	1.500”	0.275 lb.
1-1/2”	150-3W	3.560”	3.560”	3.560”	1.900”	1.500”	0.363 lb.
2”	200-3W	4.038”	4.038”	4.038”	2.375”	1.312”	0.410 lb.

MATERIAL & MECHANICAL PROPERTIES

- UV-resistant for outdoor use for full sunlight exposure.
- Impact resistant for increased durability
- Material is self-extinguishing
- Heavy metal and phthalate-free
- Glossy surface finish for a professional appearance.
- Compatible with standard Schedule 40 PVC pipe.
- Can be secured with clear PVC cement/solvents or with fasteners.

© PVC Pipeworks LLC - Product ID - 3W