

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/18/16	


APPROVED: _____

DATE: _____ TITLE: _____

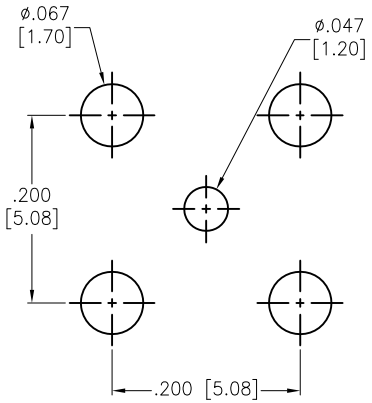

RECOMMENDED PCB LAYOUT

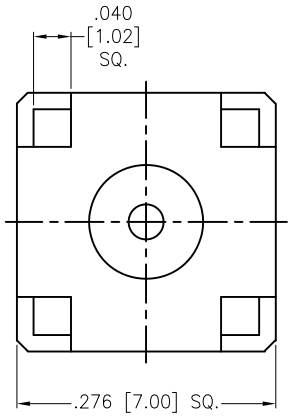

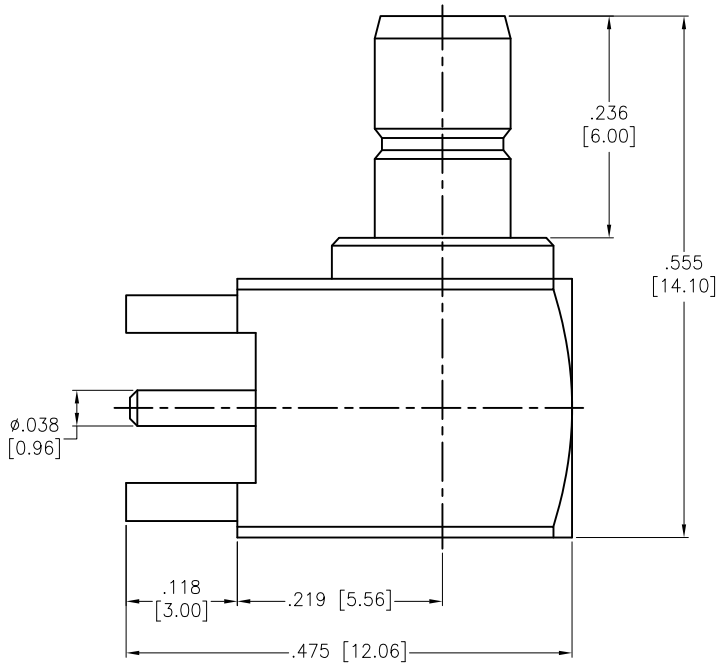

DESCRIPTION	MATERIAL	FINISH
INSULATOR	PTFE	WHITE
HOUSING	BRASS	GOLD
CONTACT PIN	BRASS	GOLD
INSULATOR	PTFE	WHITE
BODY	BRASS	GOLD

SPECIFICATIONS:

Electrical:

Nominal Impedance: 50 ohms

Frequency range: DC–4 GHz

Working Voltage: 335 VOLTS max

Proof Voltage: 1,000 VOLTS

Temperature Rating:

Operating temperature: –65°C to +165°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	5/18/16
CHECKED	LW	5/18/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SMB JACK R/A PCB MOUNT

SIZE	PART NO.	REV.
X	RF3-46-T-00-50-G	-

REF: S00277T | SCALE: NTS | SHEET 1 OF 1