


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

RFT-1229

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	11/7/03	JDMc

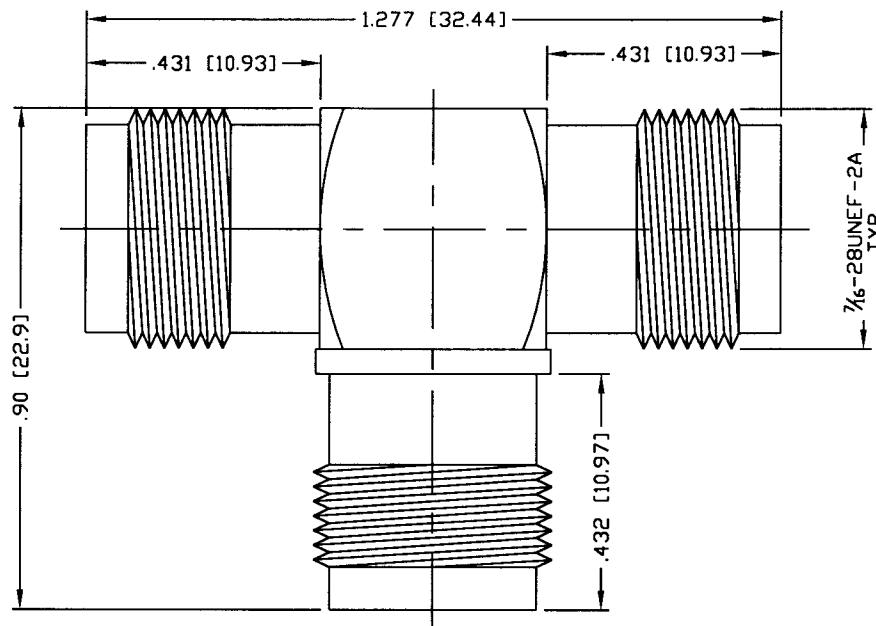

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-7 GHz
WORKING VOLTAGE: 500 V rms @ sea level
INSULATION RESISTANCE: 5k M ohms min.
TEMPERATURE RANGE: -65°C TO +165°C

1	BODY	1	BRASS	NICKEL, 100μ"	000000	UNLESS OTHERWISE SPECIFIED:	 7610 MIRAMAR RD SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX	TNC TRIPLE JACK "T" ADAPTER	SIZE A	CABLE GROUP N/A	DWG NO. RFT-1229	REV —
2	PRESS BODY	1	BRASS	NICKEL, 100μ"								
3	CONTACT	1	BRASS	GOLD, 3μ"								
4	CONTACT	1	BRASS	GOLD, 3μ"								
5	INSULATOR	3	PTFE	---								
6	PRESS WASHER	2	BRASS	NICKEL, 100μ"								
7					DRAWN C. ZUNIGA CHECKED ORJ DRAWN C. ZUNIGA	11/7/03 11-7-08 11/7/03	DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED TOLERANCES ARE: DECIMALS DIAMETER	SCALE: NTS	CAD FILE OUTLINE	SHEET 1 OF 1		
8												
9												
10												
11												
12												
13												
14												
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE						