
SIGN	DATE	DESCRIPTION	APPROVER
1	02/03'05	Part No. changed.	Marvin
2	06/26'06	Solid/Stranded wire(AWG) is changed from 12-22 to 12-24	Marvin
3	8/10'06	Added VDE and TUV standard	梁仁松
4	12/15'08	Flange screw changed from "-"solt type to "+/-"solt type	Kind
5	12/15'08	Operating Temp. changed from -30°C~+105°C to -40°C~+115°C	Kind
6	2010.03.08	Add the 2P mark	Jacke
7	12/08-14	Update the drawing	Evan
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

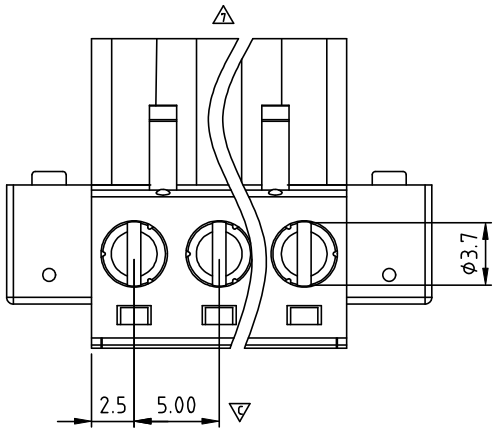


TJ xx 71x 2 xxxx G 1 7


G RoHS compliant (lead<4%) In copper Alloy

No. OF POLES
02: 2 POLES
03: 3 POLES
:
:
24: 24 POLES

COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

000 0 Standard @ Logo
000 A Standard ANY Logo
Any special item by customer request, please contact sales department.

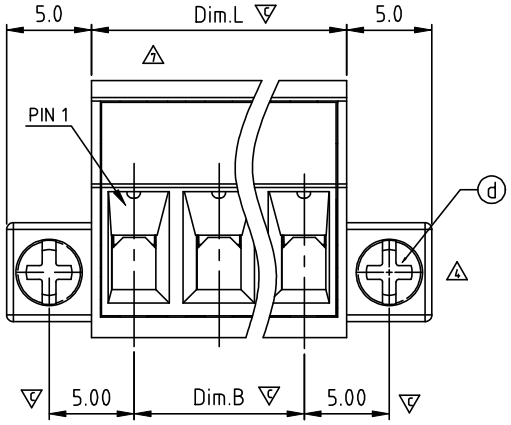

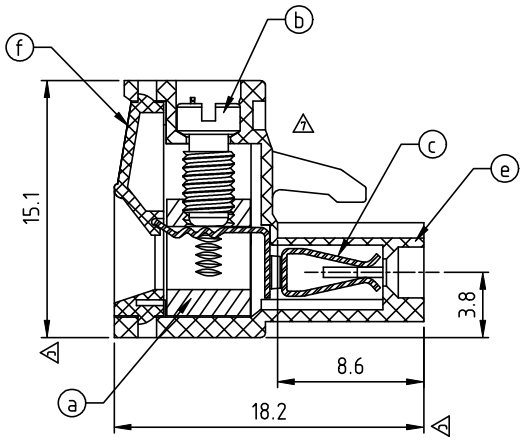


Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz ,Tin plated
- 4 Item d With flange screw:Steel Zinc plating M2.5"+/-" slot type
- Item e Terminal (housing): Thermoplastic (UL94V-0)
- Item f Terminal (cover): Thermoplastic (UL94V-0)

3 Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 20A/20A/20A
- Wire range: $2.5mm^2/0.34-2.5mm^2$
- 2 Solid wire(AWG): 12-24
- 2 Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- 5 Operating temperature: -40°C to +115°C
- Safety Approval: cULus VDE TÜV
- Critical dimension: V



Dim.L = N x 5.0
Dim.B = (N-1) x 5.0
N= number of poles

Dim. \ poles	2P-6P	7P-12P	13P-18P	19P-24P
Dim.L	±0.10	±0.20	±0.30	±0.40
Dim.B	±0.10	±0.20	±0.25	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TJ-5.00mm Series With flange					
PART NO.	TJxx71x2xxxxG			DWG NO.	8TJ0302	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Evan 2014.12.08	Evan 2014.12.08	UNIT: mm		X. ±0.50
				SCALE: NONE		X.X ±0.30
				SHEET: 01/01	REV.: H	X.XX ±0.10 X° ±1°