SLA4030

NPN Darlington
General purpose

External dimensions Ⓐ ··· SLA (12-pin)

Absolute maximum ratings

(Ta=25°C)


Symbol	Ratings	Unit
V_{CBO}	120	V
V_{CEO}	100	V
V_{EBO}	6	V
I_C	4	A
I_{CP}	6 (PW≤1ms, Du≤50%)	A
I_B	0.5	A
P_T	5 (Ta=25°C)	W
	25 (Tc=25°C)	
V_{ISO}	1000 (Between fin and lead pin, AC)	Vrms
T_j	150	°C
T_{stg}	–40 to +150	°C
$\theta_{j\text{-}c}$	5	°C/W

Electrical characteristics

(Ta=25°C)

Symbol	Specification			Unit	Conditions
	min	typ	max		
I_{CBO}			10	μA	V_{CB}=120V
I_{EBO}			10	mA	V_{EB}=6V
V_{CEO}	100			V	I_C=10mA
h_{FE}	2000				V_{CE}=4V, I_C=2A
V_{CE}(sat)			1.5	V	I_C=2A, I_B=10mA


■Equivalent circuit diagram

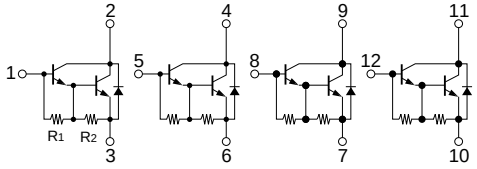


R1: 3kΩ typ R2: 500Ω typ

Characteristic curves


I_C-V_{CE} Characteristics (Typical)




h_{FE}-I_C Characteristics (Typical)




h_{FE}-I_C Temperature Characteristics (Typical)




V_{CE}(sat)-I_C Temperature Characteristics (Typical)




V_{CE}(sat)-I_B Characteristics (Typical)




I_C-V_{BE} Temperature Characteristics (Typical)




$\theta_{j\text{-}a}$-PW Characteristics




P_T-T_a Characteristics




Safe Operating Area (SOA)




• SIP 8 (STA8Pin)

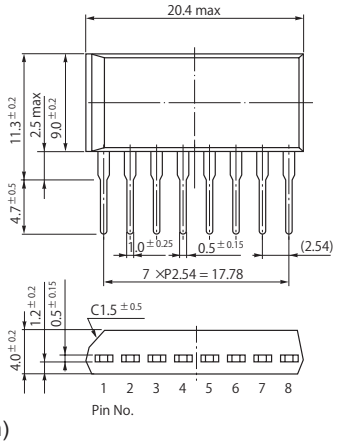


• SIP 10 (STA10Pin)

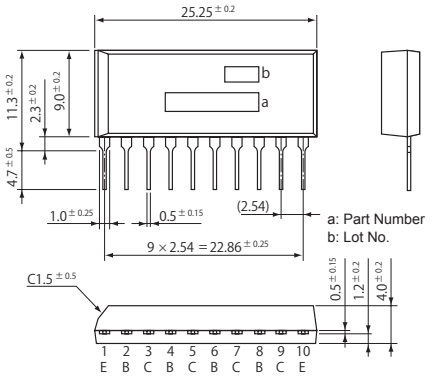


• SIP 12 (SMA12Pin)

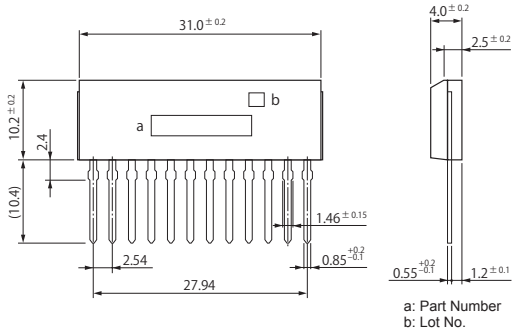


• SIP 15 (SMA15Pin)

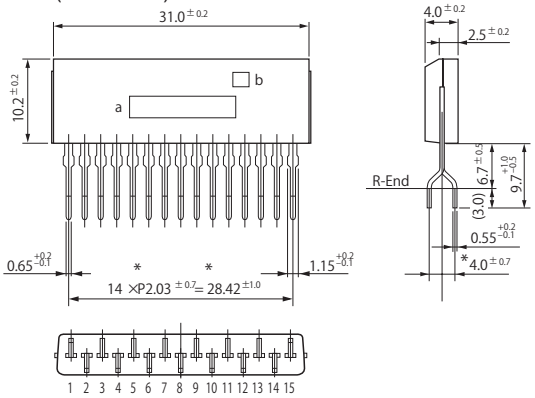


• SIP 12 with Fin (SLA12Pin)

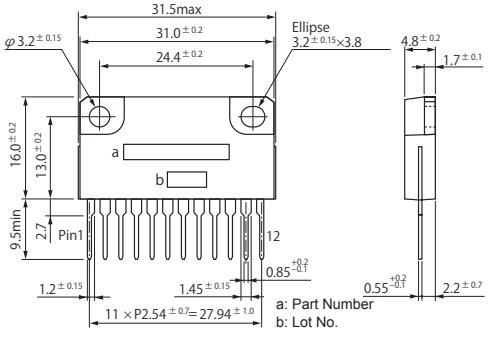

• SIP 15 with Fin (SLA15Pin)

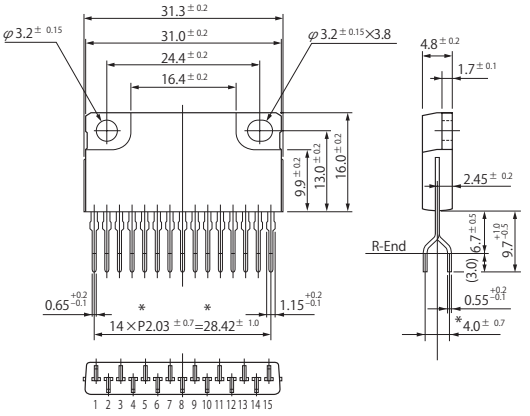

• SIP 21 with Fin (SLA21Pin)

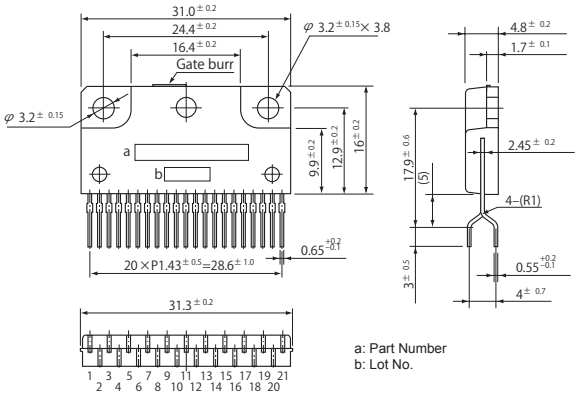

(Unit:mm)