

STGD7NC60HT4

Datasheet

N-channel 600 V, 14 A, very fast IGBT



DPAK



G1C2TE3

Features

Order codes	V_{CES}	$V_{CE(sat)}$ max.	I_C (at T_C = 100 °C)
STGD7NC60HT4	600 V	2.5 V	14 A

- Low on-voltage drop ($V_{CE(sat)}$)
- High-frequency operation up to 70 kHz

Applications

- Switching applications

Description

This device is a very fast IGBT developed using advanced PowerMESH™ technology. This process guarantees an excellent trade-off between switching performance and low on-state behavior. This device is well-suited for resonant or soft-switching applications.

Product status link
STGD7NC60HT4

Product summary	
Order code	STGD7NC60HT4
Marking	GD7NC60H
Package	DPAK
Packing	Tape and reel

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CES}	Collector-emitter voltage (V_{GE} = 0 V)	600	V
I_C	Continuous collector current at T_C = 25 °C	25	A
	Continuous collector current at T_C = 100 °C	14	A
I_{CM}(1)	Pulsed collector current	50	A
V_{GE}	Gate-emitter voltage	±20	V
P_{TOT}	Total dissipation at T_C = 25 °C	70	W
T_{STG}	Storage temperature range	-55 to 150	°C
T_J	Operating junction temperature range		

1. *Pulse width limited by maximum junction temperature.*

Table 2. Thermal data

Symbol	Parameter	Value	Unit
$R_{thJ\text{-}case}$	Thermal resistance junction-case	1.78	°C/W
$R_{thJ\text{-}amb}$	Thermal resistance junction-ambient	100	°C/W

2 Electrical characteristics

T_C = 25 °C unless otherwise specified

Table 3. Static characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CES}$	Collector-emitter breakdown voltage	V_{GE} = 0 V, I_C = 1 mA	600			V
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{GE} = 15 V, I_C = 7 A		1.85	2.5	V
		V_{GE} = 15 V, I_C = 7 A, T_J = 125 °C		1.7		
$V_{GE(th)}$	Gate threshold voltage	V_{CE} = V_{GE}, I_C = 250 µA	3.75		5.75	V
I_{CES}	Collector cut-off current	V_{GE} = 0 V, V_{CE} = 600 V			10	µA
		V_{GE} = 0 V, V_{CE} = 600 V, T_C=125 °C (1)			1	mA
I_{GES}	Gate-emitter leakage current	V_{CE} = 0 V, V_{GE} = ±20 V			±100	nA

1. *Defined by design, not subject to production test.*

Table 4. Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{ies}	Input capacitance	V_{CE}= 25 V, f = 1 MHz, V_{GE} = 0 V		720	-	pF
C_{oes}	Output capacitance			81	-	
C_{res}	Reverse transfer capacitance			17	-	
Q_g	Total gate charge	V_{CE} = 390 V, I_C = 7 A, V_{GE} = 15 V (see Figure 16. Gate charge test circuit)		35	-	nC
Q_{ge}	Gate-emitter charge			7	-	
Q_{gc}	Gate-collector charge			16	-	
I_{CL}	Turn-off SOA minimum current	V_{clamp} = 480 V, T_j = 150 °C, R_G = 10 Ω, V_{GE} = 15 V	50		-	A

Table 5. Switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{CC} = 390 V, I_C = 7 A, V_{GE} = 15 V, R_G = 10 Ω (see Figure 14. Ic vs frequency and Figure 15. Test circuit for inductive load switching)	-	18.5		ns
$t_{r(on)}$	Turn-on rise time		-	8.5		ns
$di/dt_{(on)}$	Turn-on current slope		-	1060		A/µs
$t_{r(off)}$	Turn-off rise time		-	27		ns
$t_{d(off)}$	Turn-off delay time		-	72		ns
t_f	Fall time		-	60		ns
E_{on} (1)	Turn-on switching energy		-	95	125	µJ
E_{off} (2)	Turn-off switching energy		-	115	150	µJ
E_{ts}	Total switching energy		-	210	275	µJ
$t_{d(on)}$	Turn-on delay time	V_{CE} = 390 V, I_C = 7 A, V_{GE} = 15 V, R_G = 10 Ω, T_J = 125 °C (see Figure 14. Ic vs frequency and Figure 15. Test circuit for inductive load switching)	-	18.5		ns
$t_{r(on)}$	Turn-on rise time		-	7		ns
$di/dt_{(on)}$	Turn-on current slope		-	1000		A/µs
$t_{r(off)}$	Turn-off rise time		-	56		ns
$t_{d(off)}$	Turn-off delay time		-	116		ns
t_f	Fall time		-	105		ns
E_{on} (1)	Turn-on switching energy		-	140		µJ
E_{off} (2)	Turn-off switching energy		-	215		µJ
E_{ts}	Total switching energy		-	355		µJ

1. *Including the reverse recovery of the diode. The diode is the same as the co-packaged in STGP7NC60HD.*
2. *Including the tail of the collector current.*

2.1 Electrical characteristics (curves)

Figure 1. Output characteristics

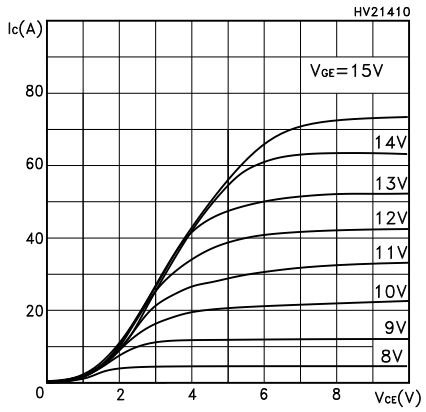


Figure 2. Transfer characteristics

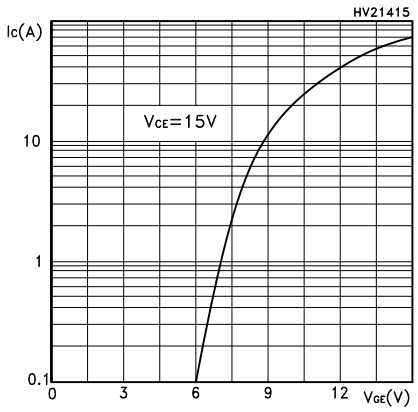


Figure 3. Collector-emitter on voltage vs temperature

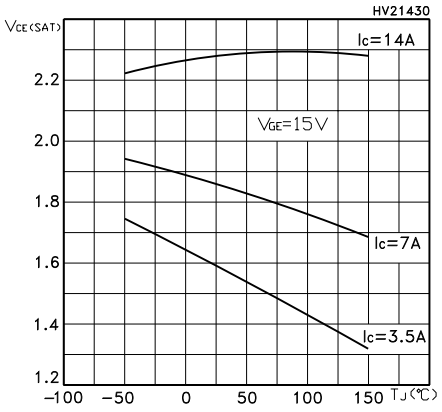


Figure 4. Collector-emitter on voltage vs collector current

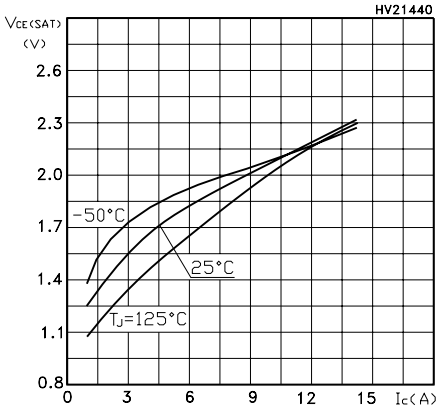


Figure 5. Normalized gate threshold vs temperature

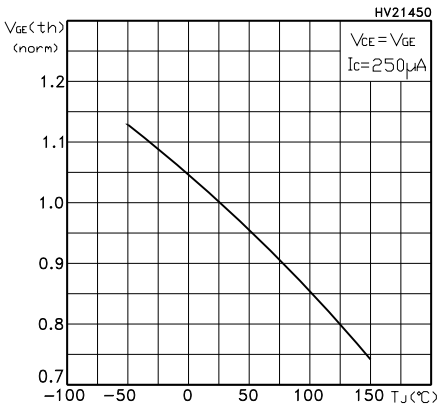


Figure 6. Normalized breakdown voltage vs temperature

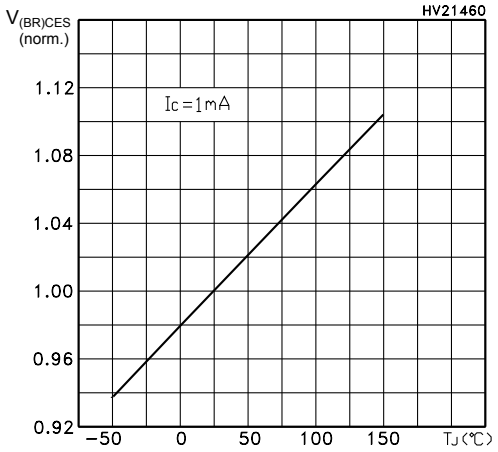


Figure 7. Gate charge vs gate-emitter voltage

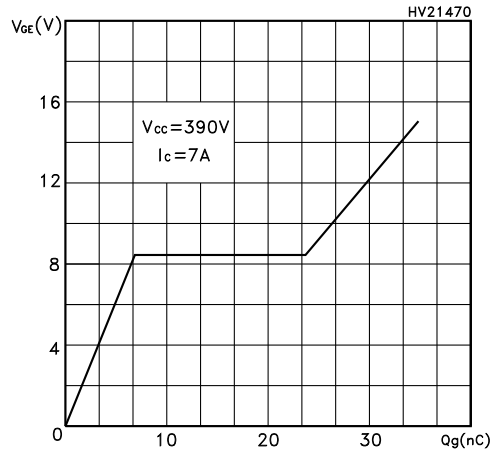


Figure 8. Capacitance variations

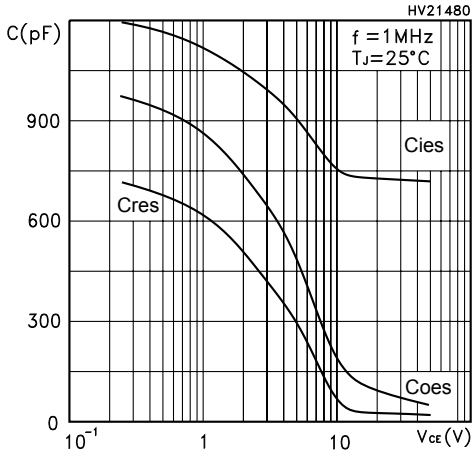


Figure 9. Total switching energy vs temperature

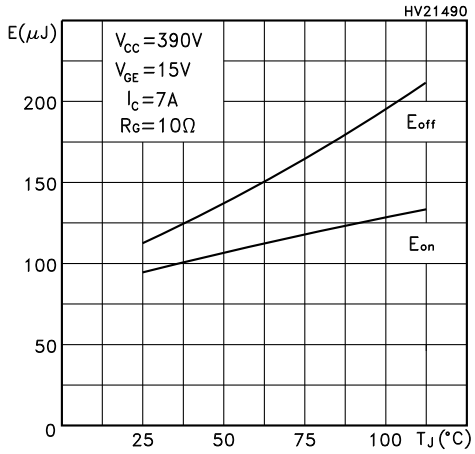


Figure 10. Total switching energy vs gate resistance

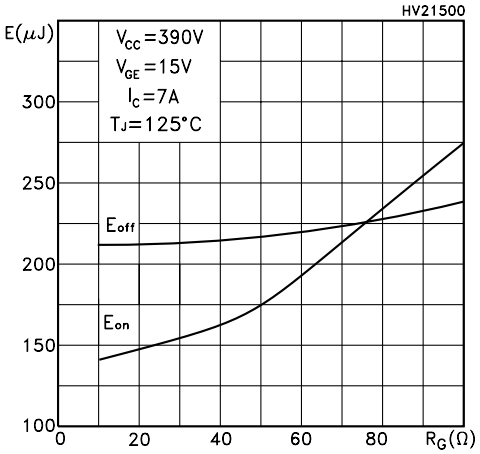


Figure 11. Total switching energy vs collector current

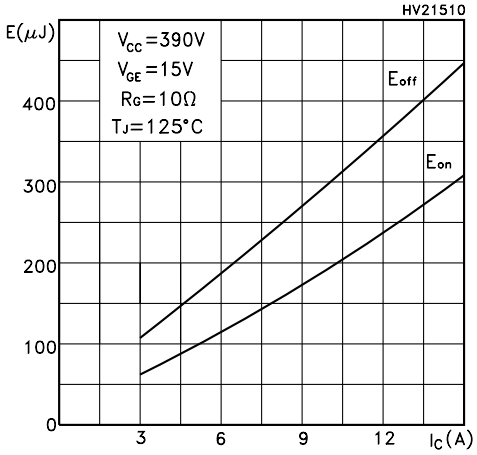


Figure 12. Thermal impedance

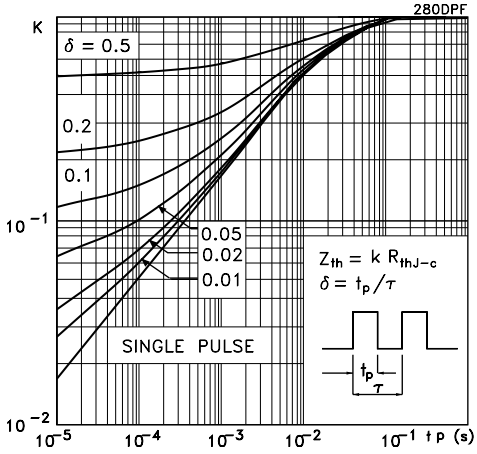


Figure 13. **Turn-off SOA**


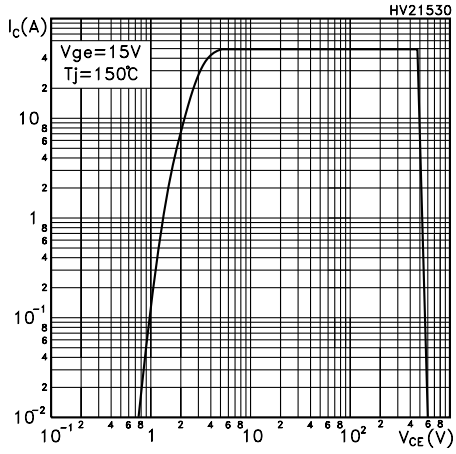


Figure 14. **Ic vs frequency**

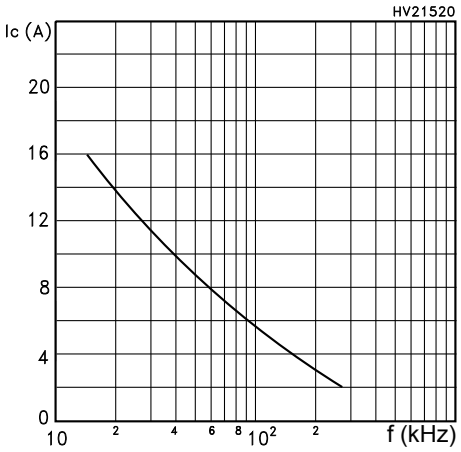

3 Test circuits

Figure 15. Test circuit for inductive load switching

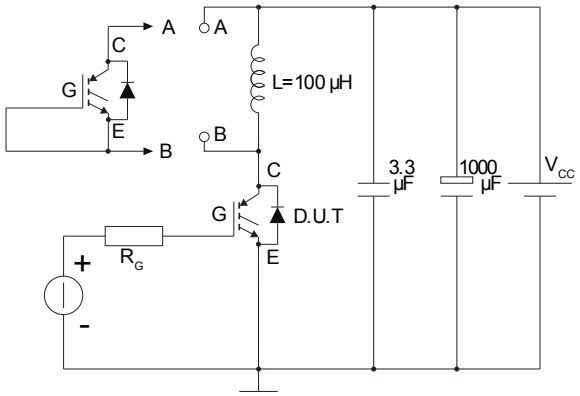


Figure 16. Gate charge test circuit


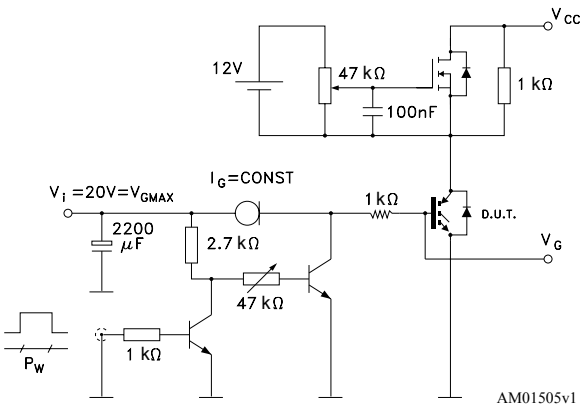


Figure 17. Switching waveform

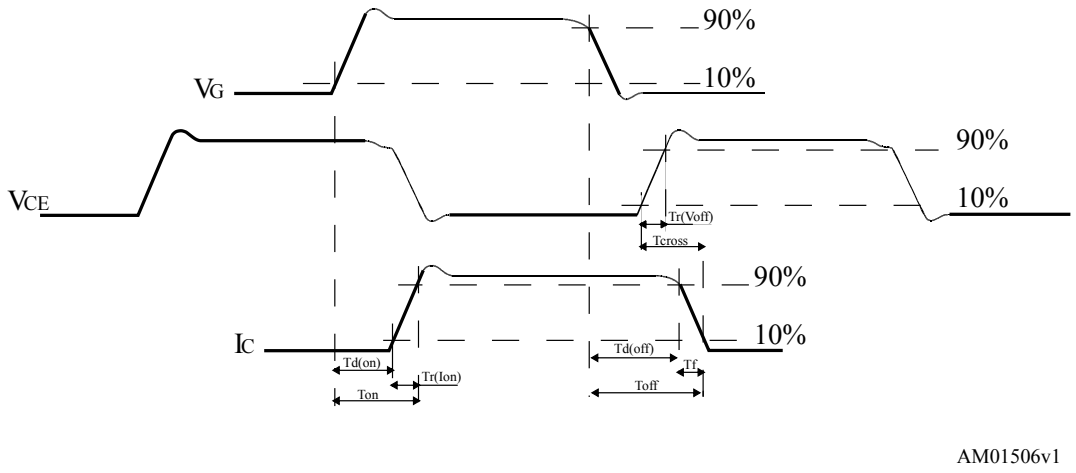

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

4.1 DPAK (TO-252) type A2 package information

Figure 18. **DPAK (TO-252) type A2 package outline**


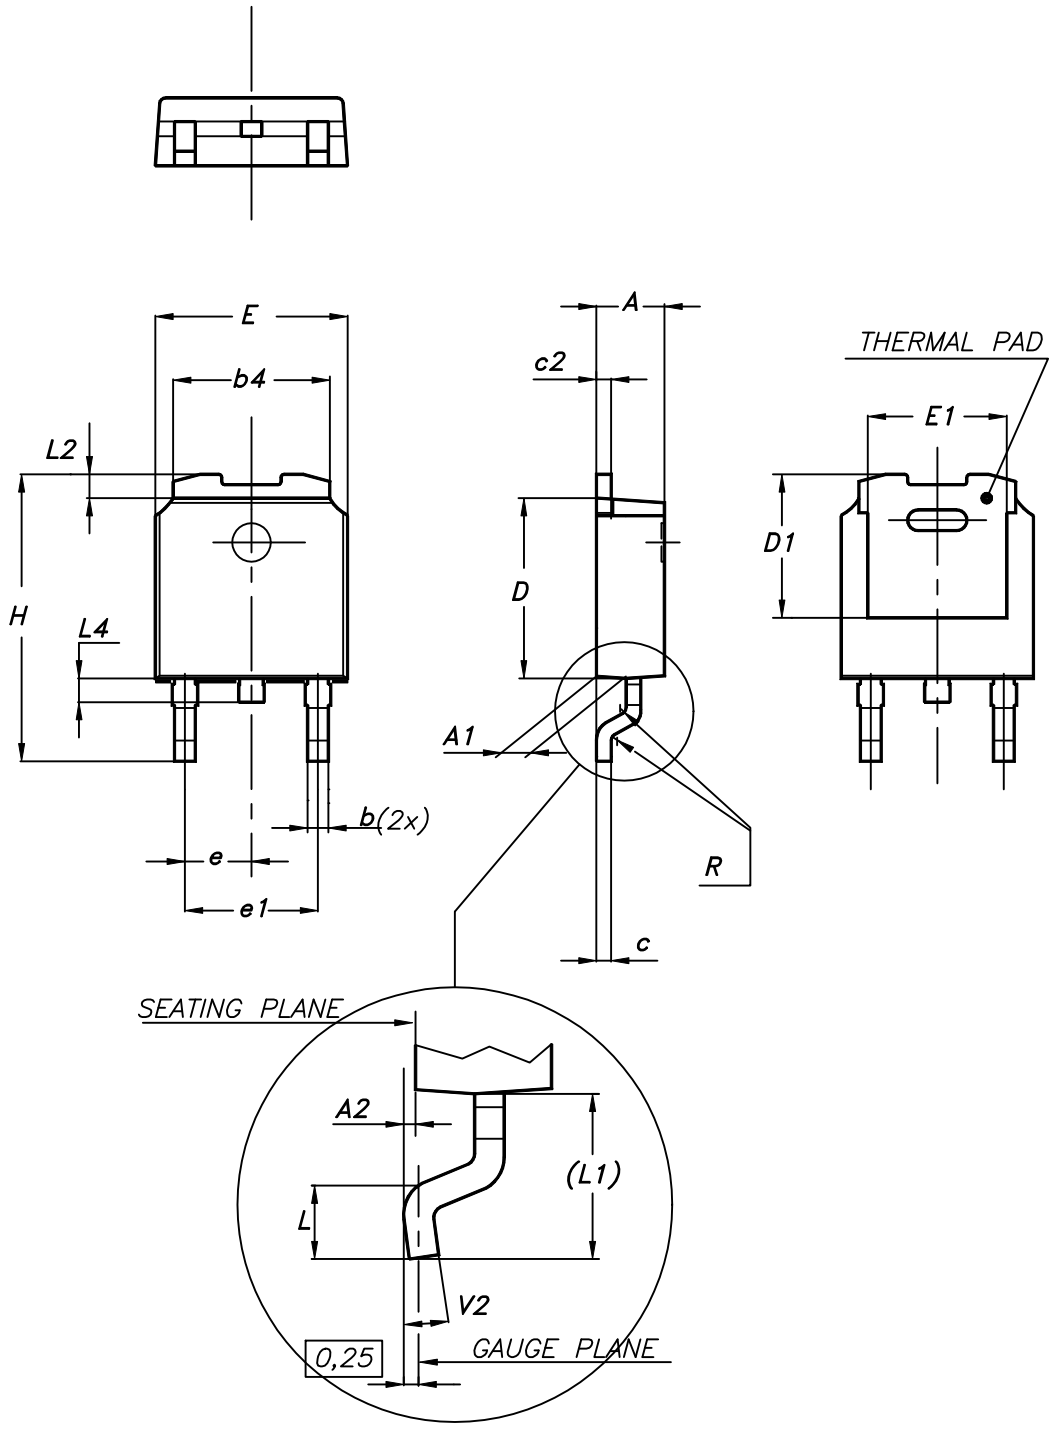


Table 6. **DPAK (TO-252) type A2 mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	2.20		2.40
A1	0.90		1.10
A2	0.03		0.23
b	0.64		0.90
b4	5.20		5.40
c	0.45		0.60
c2	0.48		0.60
D	6.00		6.20
D1	4.95	5.10	5.25
E	6.40		6.60
E1	5.10	5.20	5.30
e	2.159	2.286	2.413
e1	4.445	4.572	4.699
H	9.35		10.10
L	1.00		1.50
L1	2.60	2.80	3.00
L2	0.65	0.80	0.95
L4	0.60		1.00
R		0.20	
V2	0°		8°

4.2 DPAK (TO-252) type C2 package information

Figure 19. **DPAK (TO-252) type C2 package outline**

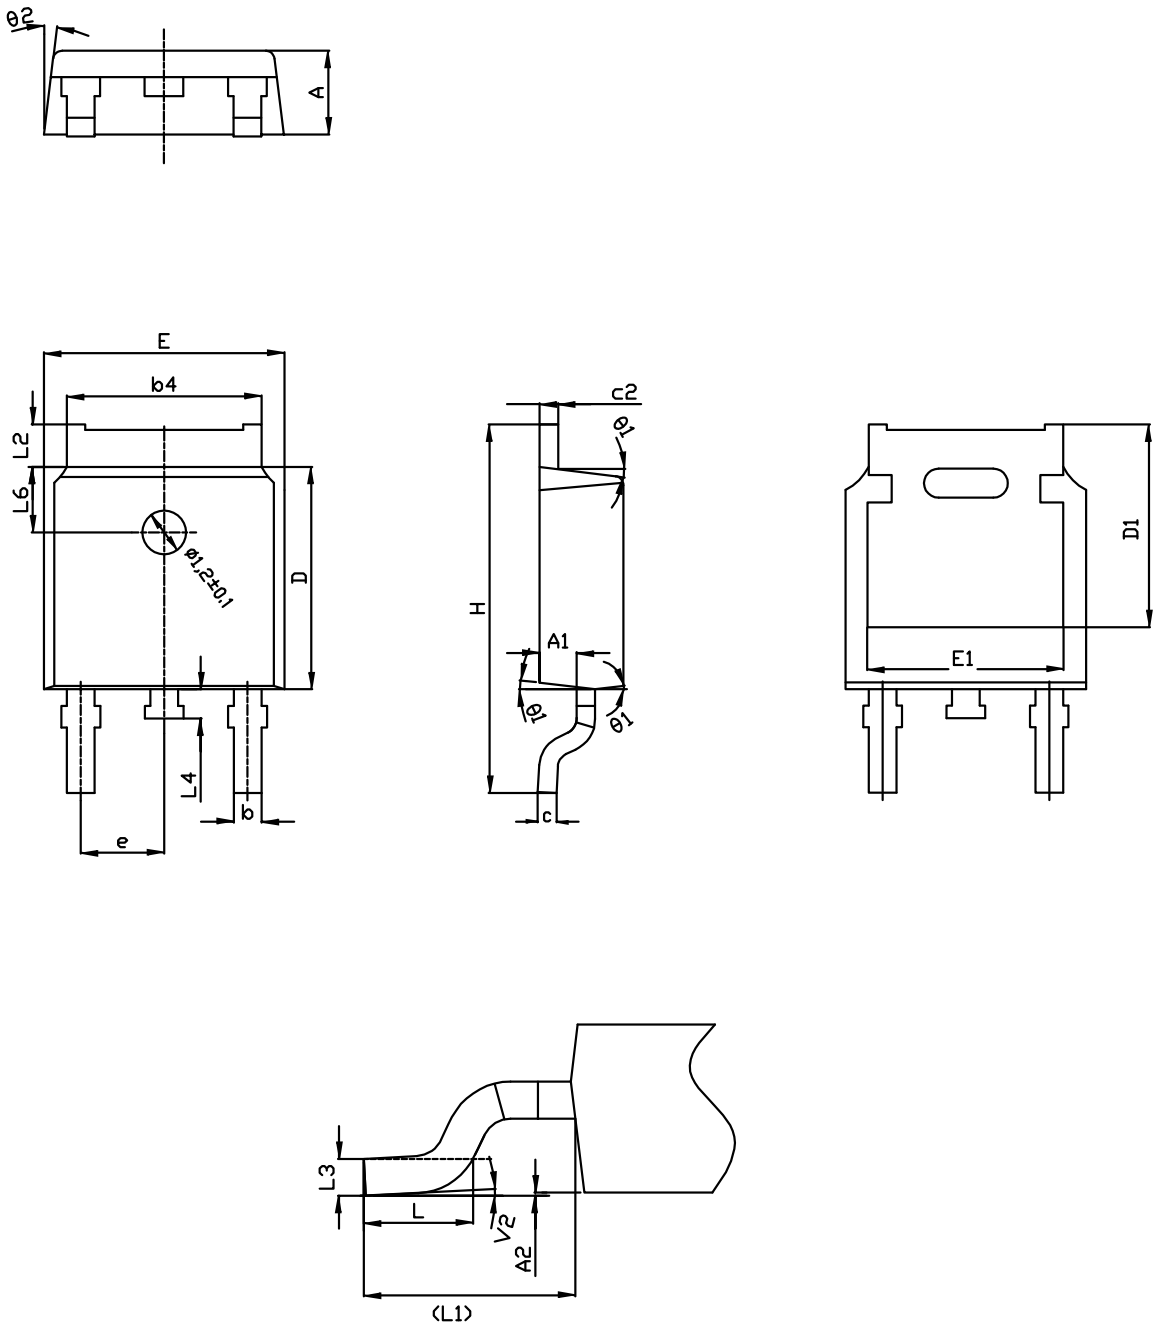


0068772_C2_25

Table 7. **DPAK (TO-252) type C2 mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	2.20	2.30	2.38
A1	0.90	1.01	1.10
A2	0.00		0.10
b	0.72		0.85
b4	5.13	5.33	5.46
c	0.47		0.60
c2	0.47		0.60
D	6.00	6.10	6.20
D1	5.10		5.60
E	6.50	6.60	6.70
E1	5.20		5.50
e	2.186	2.286	2.386
H	9.80	10.10	10.40
L	1.40	1.50	1.70
L1		2.90 REF	
L2	0.90		1.25
L3		0.51 BSC	
L4	0.60	0.80	1.00
L6		1.80 BSC	
θ1	5°	7°	9°
θ2	5°	7°	9°
V2	0°		8°

Figure 20. DPAK (TO-252) recommended footprint (dimensions are in mm)

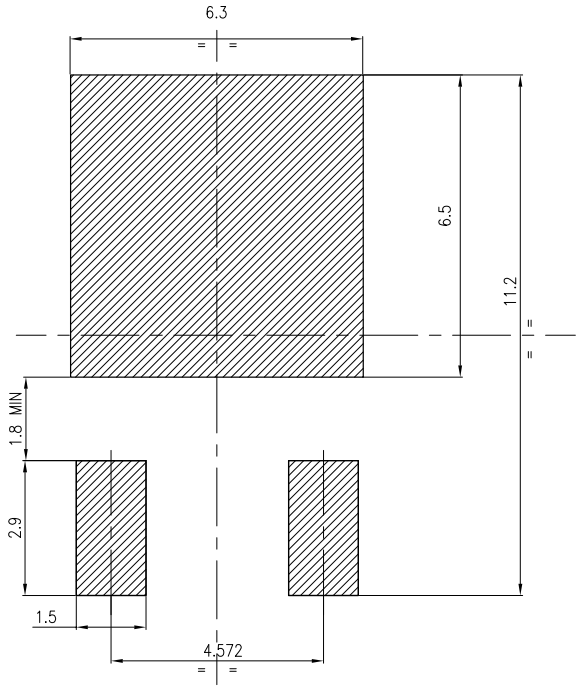

4.3 DPAK (TO-252) packing information

Figure 21. **DPAK (TO-252) tape outline**


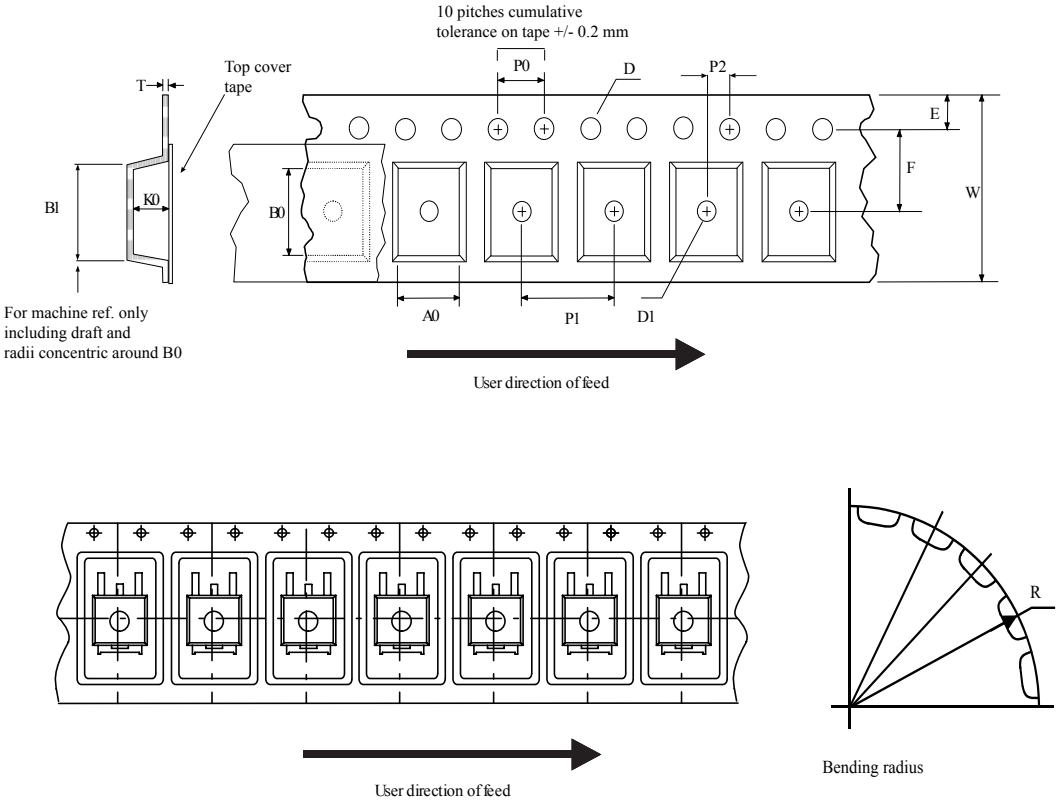


Figure 22. **DPAK (TO-252) reel outline**

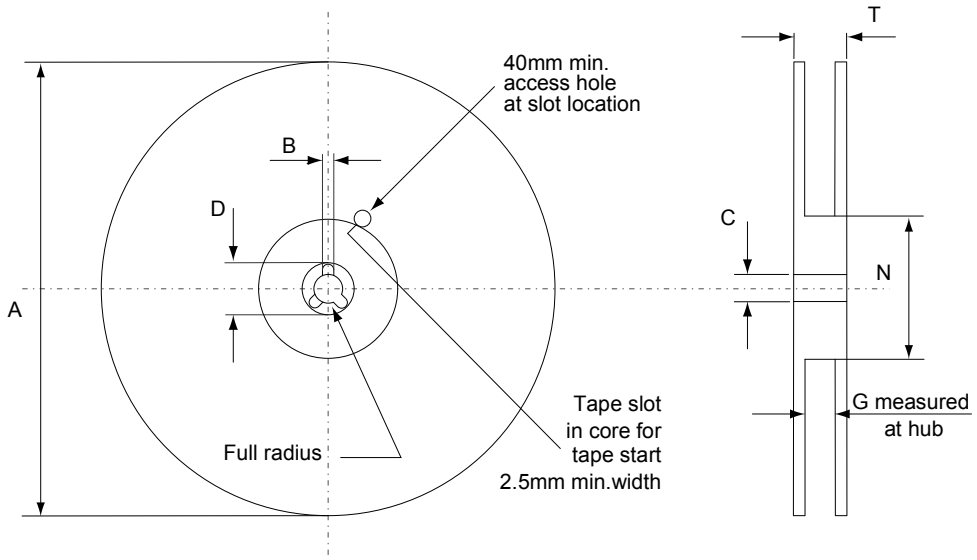

AM06038v1

Table 8. **DPAK (TO-252) tape and reel mechanical data**

Tape			Reel		
Dim.	mm		Dim.	mm	
	Min.	Max.		Min.	Max.
A0	6.8	7	A		330
B0	10.4	10.6	B	1.5	
B1		12.1	C	12.8	13.2
D	1.5	1.6	D	20.2	
D1	1.5		G	16.4	18.4
E	1.65	1.85	N	50	
F	7.4	7.6	T		22.4
K0	2.55	2.75			
P0	3.9	4.1	Base qty.		2500
P1	7.9	8.1	Bulk qty.		2500
P2	1.9	2.1			
R	40				
T	0.25	0.35			
W	15.7	16.3			

Revision history

Table 9. **Document revision history**

Date	Revision	Changes
11-Jul-2016	1	First release. Part number previously included in datasheet DocID10855.
15-Dec-2016	2	Updated Features table on cover page. Minor text changes
02-Oct-2018	3	Removed maturity status indication from cover page. The document status is production data. Updated Section 4 Package information. Minor text changes.

Contents

1 **Electrical ratings** 2

2 **Electrical characteristics** 3

2.1 Electrical characteristics (curves) 5

3 **Test circuits** 8

4 **Package information** 9

4.1 DPAK (TO-252) type A2 package information 9

4.2 DPAK (TO-252) type C2 package information 11

4.3 DPAK (TO-252) packing information 14

Revision history 17

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved