

STGWA80H65DFBAG

Datasheet

Automotive-grade trench gate field-stop 650 V, 80 A high speed HB series IGBT in a TO-247 long leads



TO-247 long leads

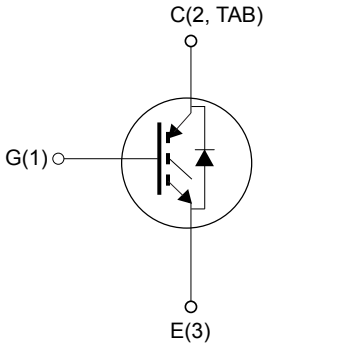

G1C2TE3_diode

Features

- AEC-Q101 qualified
- High-speed switching series
- Maximum junction temperature: T_J = 175 °C
- Low $V_{CE(sat)}$ = 1.65 V (typ.) @ I_C = 80 A
- Minimized tail current
- Tight parameter distribution
- Positive temperature $V_{CE(sat)}$ coefficient
- Soft and very fast recovery antiparallel diode

Applications

- PFC
- High frequency converters

Description

This device is an IGBT developed using an advanced proprietary trench gate field-stop structure. The device is part of the new HB series of IGBTs, which represents an optimum compromise between conduction and switching loss to maximize the efficiency of any frequency converter. Furthermore, the slightly positive $V_{CE(sat)}$ temperature coefficient and very tight parameter distribution result in safer paralleling operation.

Product status link
STGWA80H65DFBAG

Product summary	
Order code	STGWA80H65DFBAG
Marking	G80H65DFBAG
Package	TO-247 long leads
Packing	Tube

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CES}	Collector-emitter voltage (V_{GE} = 0 V)	650	V
I_C	Continuous collector current at T_C = 25 °C	120(1)	A
	Continuous collector current at T_C = 100 °C	80	
I_{CP}(2)	Pulsed collector current (t_p = 1 ms)	240	A
V_{GE}	Gate-emitter voltage	±20	V
	Transient gate-emitter voltage ($t_p \leq$ 10 µs)	±30	
I_F	Continuous forward current at T_C = 25 °C	120(1)	A
	Continuous forward current at T_C = 100 °C	80	
I_{FP}(2)	Pulsed forward current	240	A
P_{TOT}	Total power dissipation at T_C = 25 °C	535	W
T_{STG}	Storage temperature range	-55 to 150	°C
T_J	Operating junction temperature range	-55 to 175	°C

1. *Current limited by package.*
2. *Pulse width is limited by maximum junction temperature.*

Table 2. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance, junction-to-case IGBT	0.28	°C/W
	Thermal resistance, junction-to-case diode	0.41	
R_{thJA}	Thermal resistance, junction-to-ambient	50	°C/W

2 Electrical characteristics

T_J = 25 °C unless otherwise specified.

Table 3. Static characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{GE} = 15 V, I_C = 80 A		1.65	2.0	V
		V_{GE} = 15 V, I_C = 80 A, T_J = 125 °C		1.8		
		V_{GE} = 15 V, I_C = 80 A, T_J = 175 °C		1.9		
V_F	Forward on-voltage	I_F = 80 A		1.9		V
		I_F = 80 A, T_J = 125 °C		1.55		
		I_F = 80 A, T_J = 175 °C		1.4		
$V_{GE(th)}$	Gate threshold voltage	V_{CE} = V_{GE}, I_C = 1 mA	4.5	5.5	6.5	V

Table 4. Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{ies}	Input capacitance	V_{CE} = 25 V, f = 1 MHz, V_{GE} = 0 V	-	10460	-	pF
C_{oes}	Output capacitance		-	390	-	pF
C_{res}	Reverse transfer capacitance		-	215	-	pF
Q_g	Total gate charge	V_{CC} = 520 V, I_C = 80 A, V_{GE} = 0 to 15 V	-	453	-	nC

Table 5. Switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(off)}$	Turn-off delay time	V_{CC} = 400 V, I_C = 80 A, V_{GE} = 15 V, R_G = 10 Ω	-	360	-	ns
t_r	Current rise time		-	84	-	ns
$di/dt_{(on)}$	Turn-on current slope		-	720	-	A/µs
E_{on} (1)	Turn-on switching energy		-	3.26	-	mJ
$t_{d(off)}$	Turn-off delay time		-	360	-	ns
t_f	Current fall time		-	66	-	ns
E_{off} (2)	Turn-off switching energy		-	2.33	-	mJ
E_{ts}	Total switching energy		-	5.59	-	mJ
$t_{d(off)}$	Turn-off delay time	V_{CC} = 400 V, I_C = 80 A, V_{GE} = 15 V, R_G = 10 Ω, T_J = 175 °C	-	375	-	ns
t_r	Current rise time		-	90	-	ns
$di/dt_{(on)}$	Turn-on current slope		-	690	-	A/µs
E_{on} (1)	Turn-on switching energy		-	5.24	-	mJ
$t_{d(off)}$	Turn-off delay time		-	375	-	ns
t_f	Current fall time		-	65	-	ns
E_{off} (2)	Turn-off switching energy		-	2.56	-	mJ
E_{ts}	Total switching energy		-	7.8	-	mJ

1. *Including the reverse recovery of the diode.*
2. *Including the tail of the collector current.*

Table 6. Diode switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	I_F = 80 A, V_R = 400 V, V_{GE} = 15 V, di/dt = 1000 A/µs	-	64	-	ns
Q_{rr}	Reverse recovery charge		-	0.7	-	µC
I_{rrm}	Reverse recovery current		-	15	-	A
E_{rr}	Reverse recovery energy		-	92	-	µJ
t_{rr}	Reverse recovery time	I_F = 80 A, V_R = 400 V, V_{GE} = 15 V, di/dt = 1000 A/µs, T_J = 175 °C	-	120	-	ns
Q_{rr}	Reverse recovery charge		-	3.7	-	µC
I_{rrm}	Reverse recovery current		-	47	-	A
E_{rr}	Reverse recovery energy		-	595	-	µJ

2.1 Electrical characteristics (curves)

Figure 1. Total power dissipation vs temperature

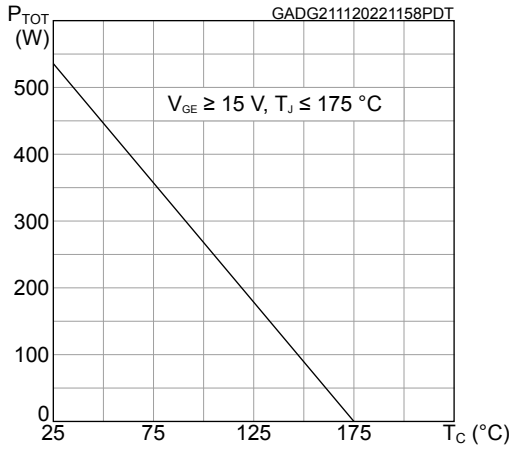


Figure 2. Collector current vs temperature

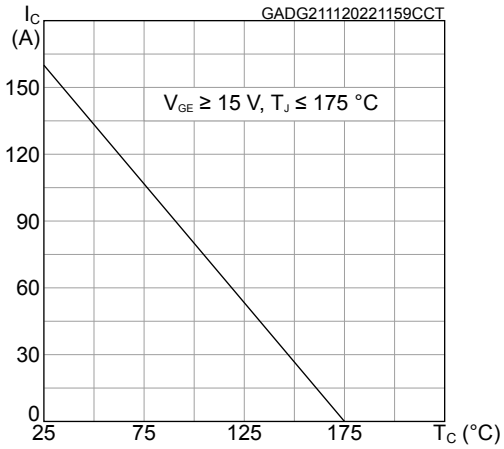


Figure 3. Typical output characteristics (T_J = 25 °C)

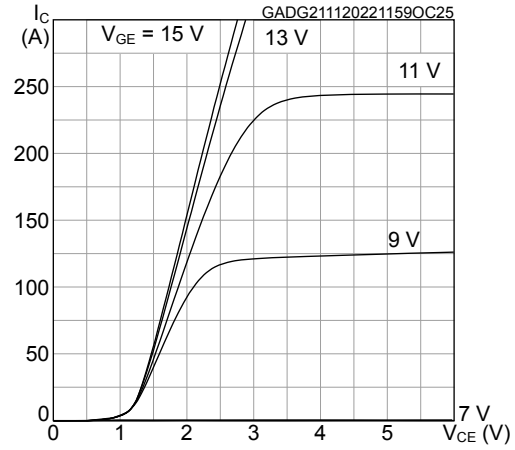


Figure 4. Typical output characteristics (T_J = 175 °C)

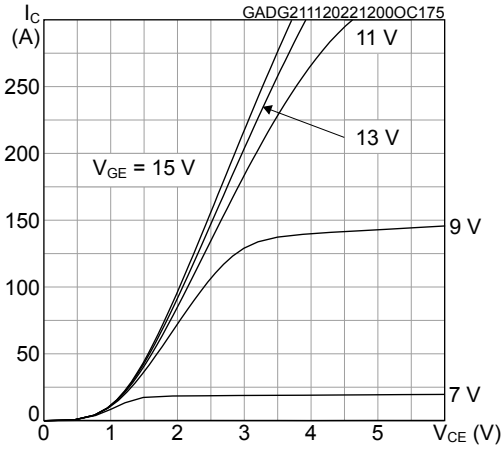


Figure 5. Typical $V_{CE(sat)}$ vs temperature

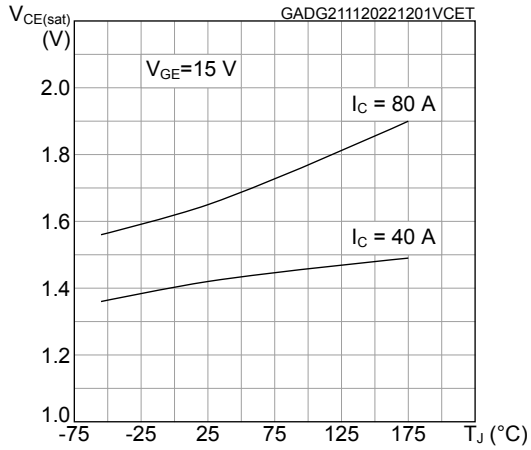


Figure 6. Typical $V_{CE(sat)}$ vs collector current

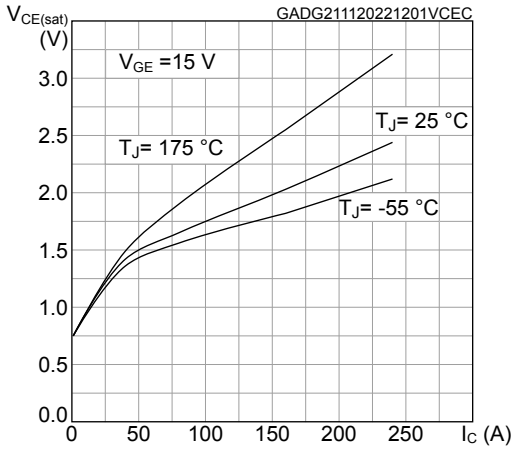


Figure 7. Forward bias safe operating area

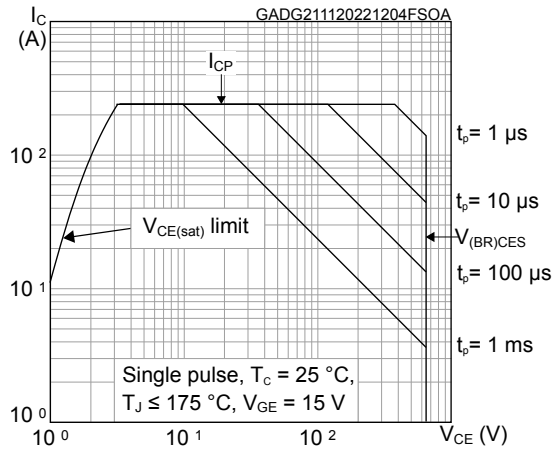


Figure 8. Collector current vs switching frequency

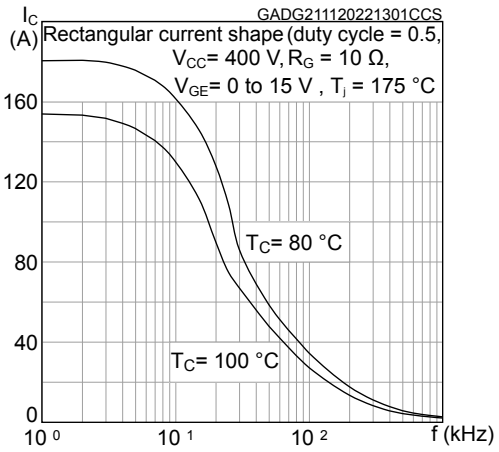


Figure 9. Typical transfer characteristics

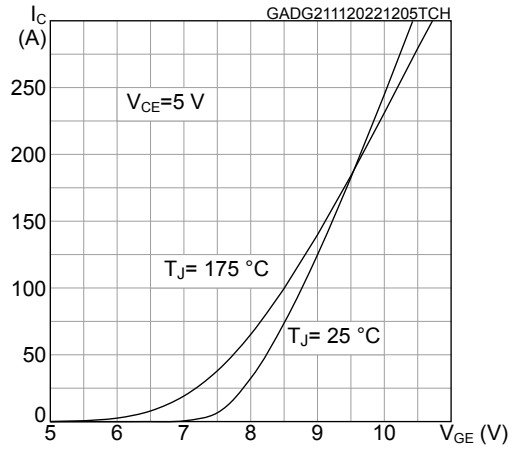


Figure 10. Typical diode V_F vs forward current

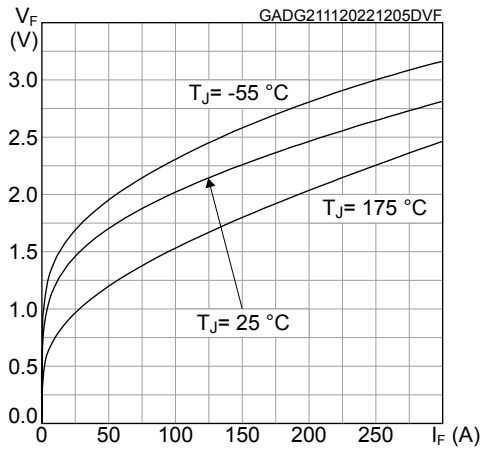


Figure 11. Normalized $V_{GE(th)}$ vs temperature

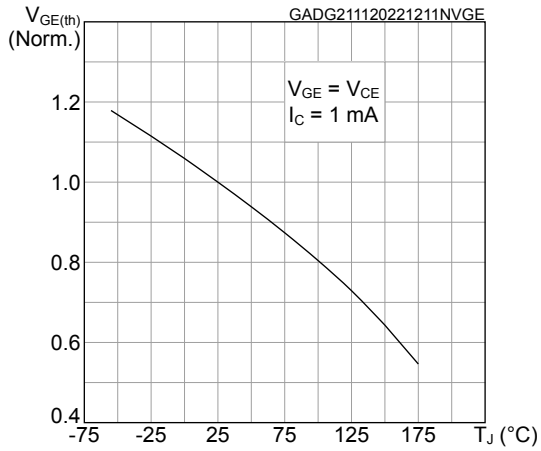


Figure 12. Normalized $V_{(BR)CES}$ vs temperature

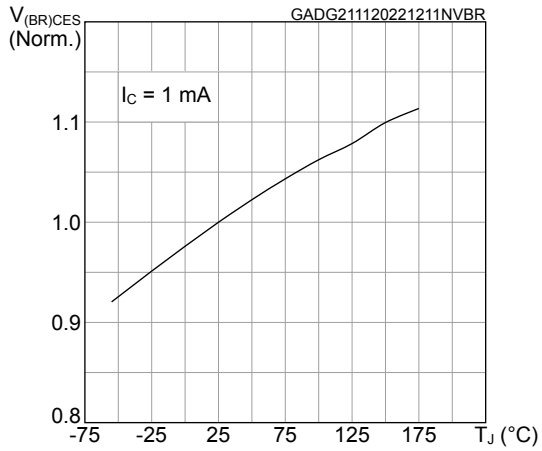


Figure 13. Typical capacitance characteristics

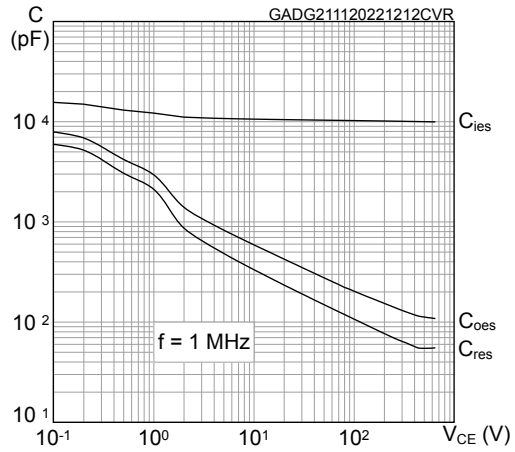


Figure 14. Typical gate charge characteristics

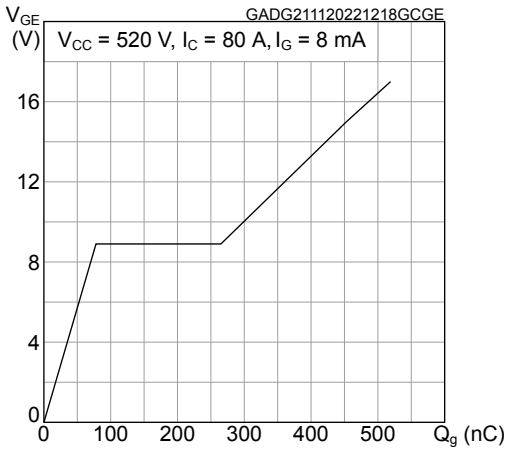


Figure 15. Typical switching energy vs collector current

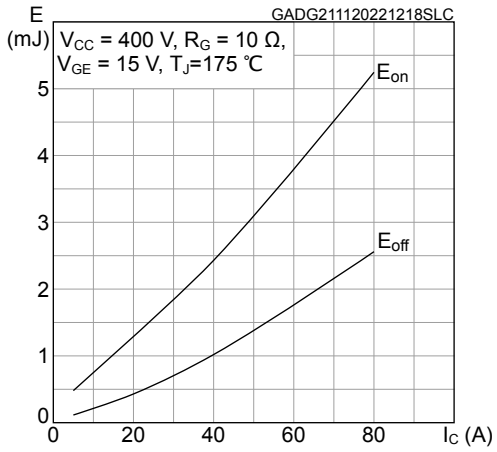


Figure 16. Typical switching energy vs temperature

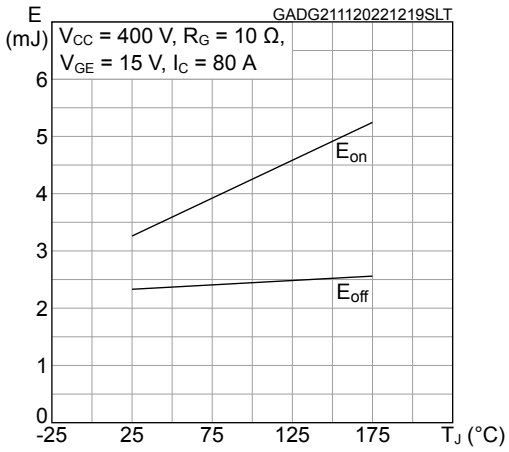


Figure 17. Typical switching energy vs collector emitter voltage

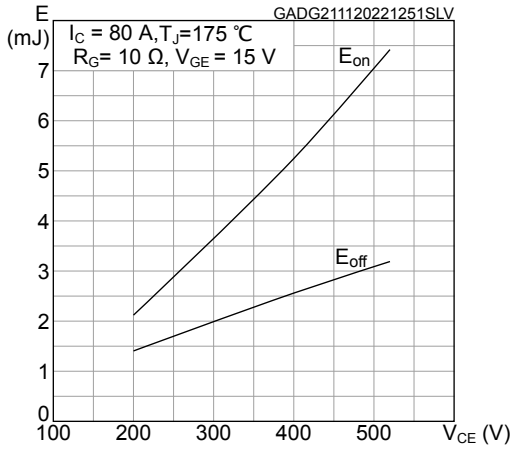


Figure 18. Typical switching energy vs R_G

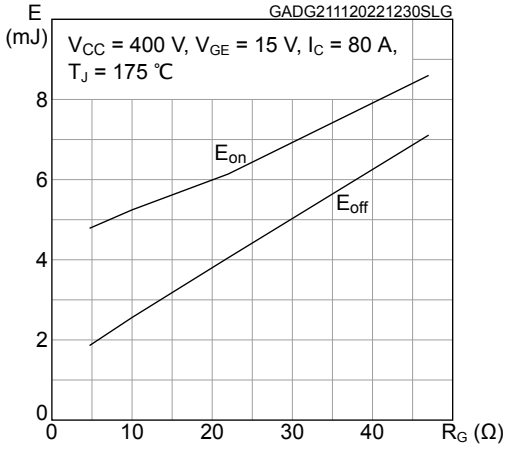


Figure 19. Typical switching times vs collector current

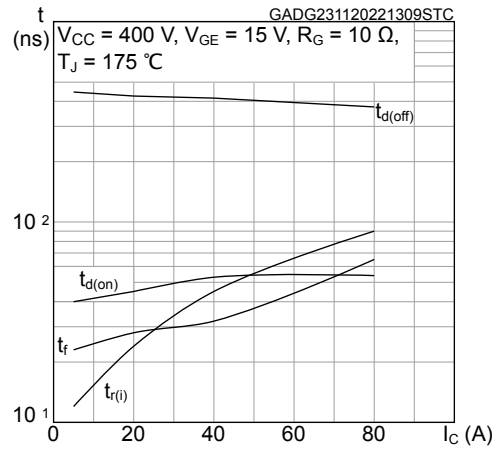


Figure 20. Typical switching times vs gate resistance

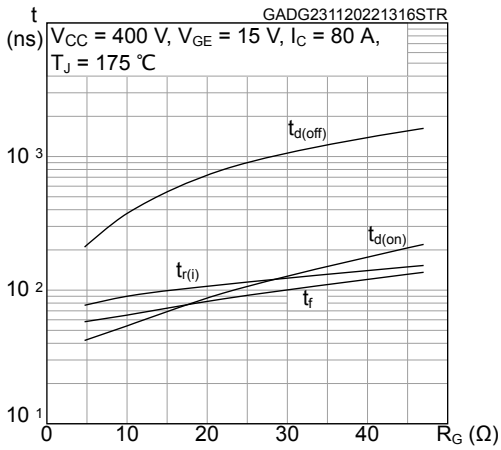


Figure 21. Typical reverse recovery current vs diode current slope

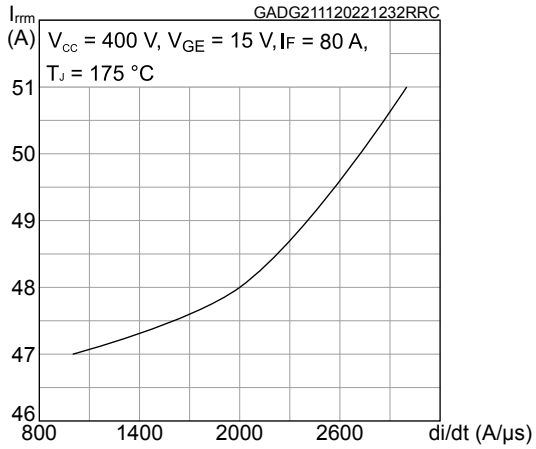


Figure 22. Typical reverse recovery time vs diode current slope

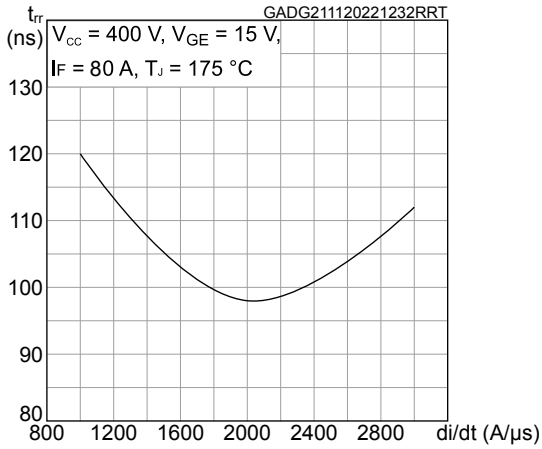


Figure 23. Typical reverse recovery charge vs diode current slope

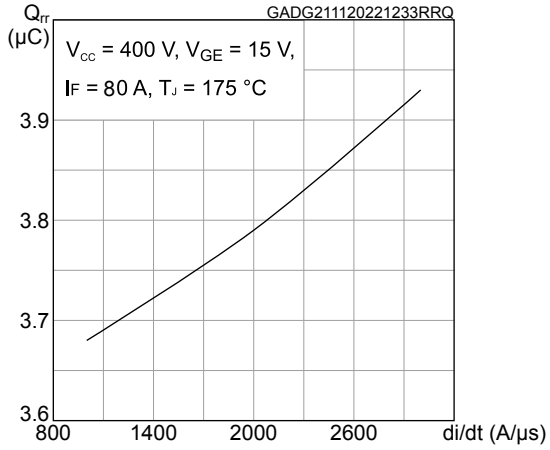


Figure 24. Typical reverse recovery energy vs diode current slope

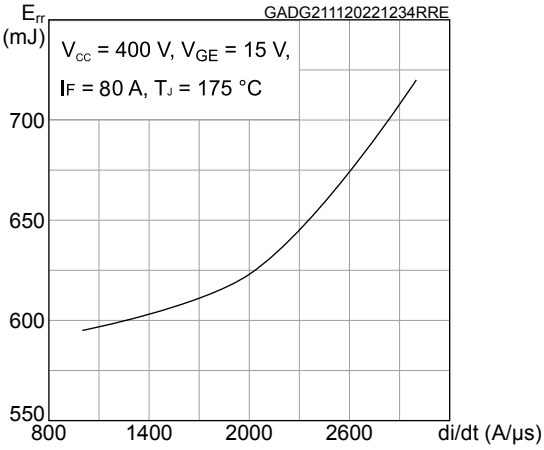


Figure 25. Maximum transient thermal impedance for IGBT


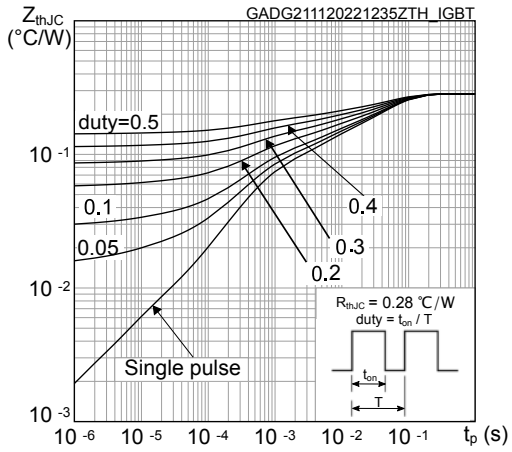


Figure 26. Maximum transient thermal impedance for diode

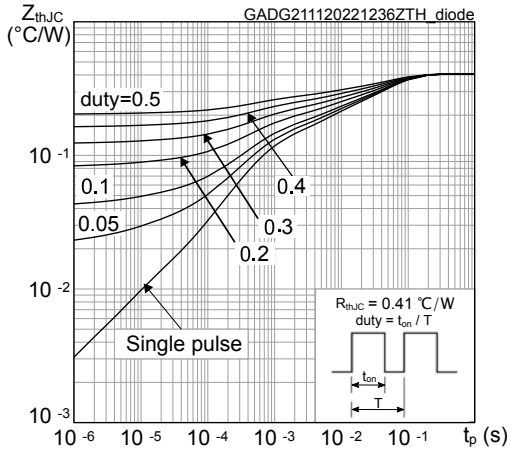


3 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

3.1 TO-247 long leads package information

Figure 27. TO-247 long leads package outline

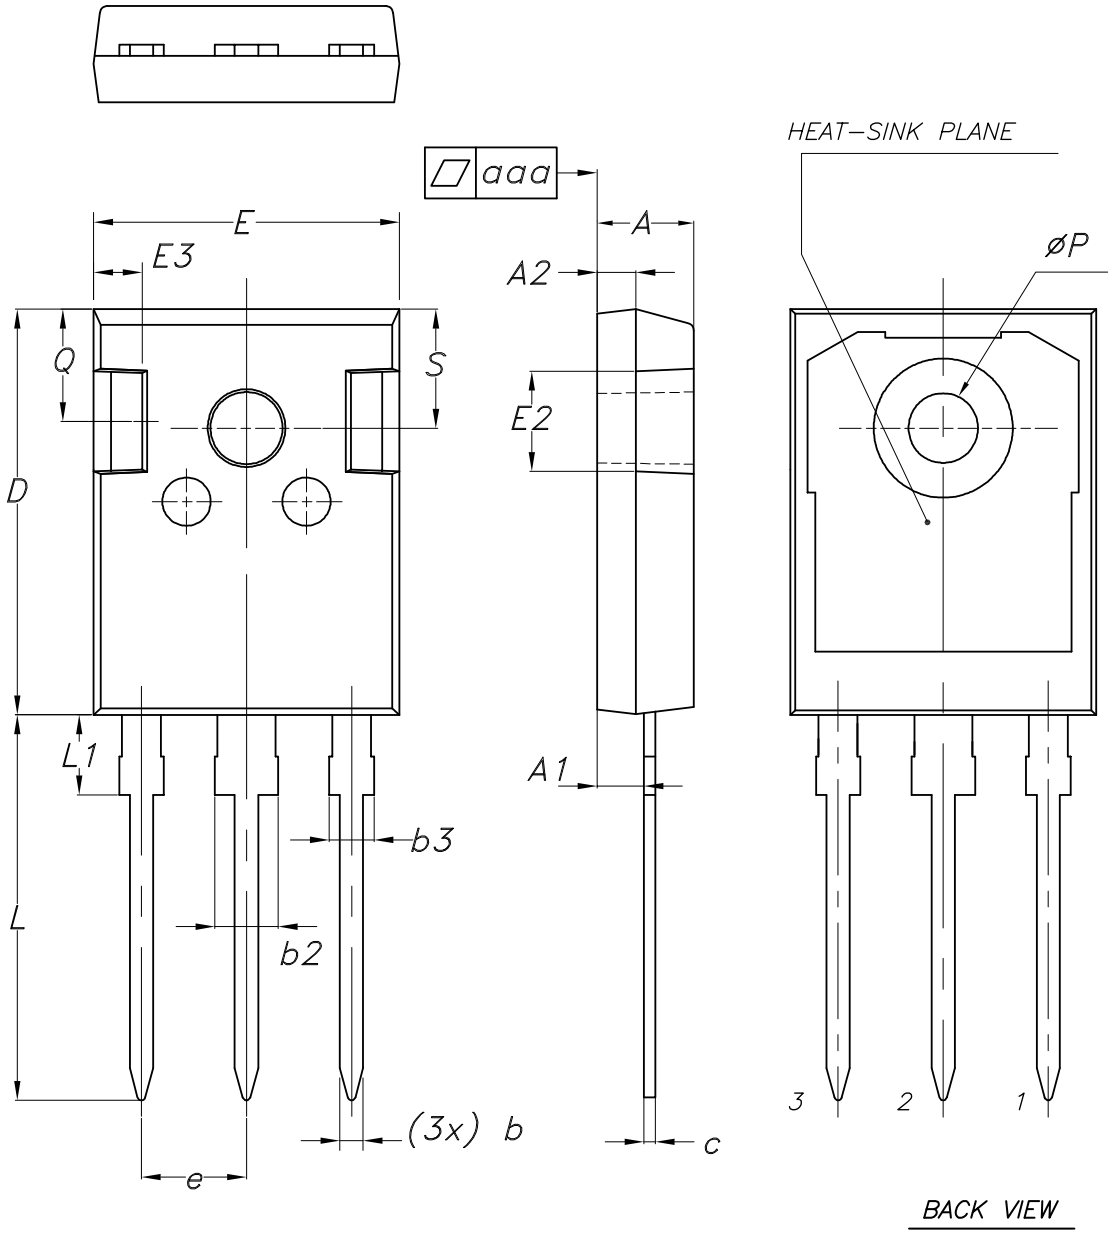

8463846_3

Table 7. **TO-247 long leads package mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
b	1.16		1.26
b2			3.25
b3			2.25
c	0.59		0.66
D	20.90	21.00	21.10
E	15.70	15.80	15.90
E2	4.90	5.00	5.10
E3	2.40	2.50	2.60
e	5.34	5.44	5.54
L	19.80	19.92	20.10
L1			4.30
P	3.50	3.60	3.70
Q	5.60		6.00
S	6.05	6.15	6.25
aaa		0.04	0.10

Revision history

Table 8. **Document revision history**

Date	Revision	Changes
06-Dec-2022	1	First release.

Contents

1 **Electrical ratings** 2

2 **Electrical characteristics** 3

2.1 Electrical characteristics (curves) 5

3 **Package information** 10

3.1 TO-247 long leads package information 10

Revision history 12

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics – All rights reserved